



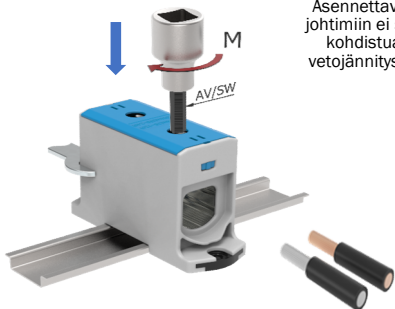


Tuotetiedot							
Tuotekoodi	Tuotenimi	I_n Al	I_n Cu	U_n	USA spesifiset		
					I_{max} Al	I_{max} Cu	U_{max}
VC05-0034	OTL-liitin 1xAl/Cu 35-240mm ² (Harmaa)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0035	OTL-liitin 1xAl/Cu 35-240mm ² (Sininen)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0036	OTL-liitin 1xAl/Cu 35-240mm ² (Keltainen/Vihreä)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0477	OTL-liitin 1xAl/Cu 35-240mm ² (Punainen)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0478	OTL-liitin 1xAl/Cu 35-240mm ² (Musta)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V



Asennus	
Sertifiointi ja hyväksyntä	DIN-kiskokilnitys ja ruuvikiinnitys M5
 	Asennus DIN-kiskoon Aseta liitin DIN-kiskolle. Paina liitintä, kunnes liitin lukittuu.  Liittimen irrotus Vapauta liittimen lukitus ruuvimeisselillä. Nosta liitin irti DIN-kiskosta.   Käytä max. Ø5 mm ruuvia.


Kytkeä									
Ruuvin koko	Ruuvi	M20	Kiristysmomentti M		35-120 mm² (250 kcmil-2 AWG)	26 Nm	Kuurintapituus L	30 mm	
	AV	8			150-240 mm² (500-300 kcmil)	46 Nm			
			Johtimet		1xAl/Cu 35-240 mm²				
Kuparijohtimet		Alumiinijohtimet		Sallitut IEC 60228 -johtintyytit			Sektorikaapeli		
Max. 3 X CU / Liitinaukko		1 X AL / Liitinaukko		Class 5 & 6 (hienosäikeinen) Suositellaan johdinpääholkkia					
				Class 1 & 2 (yksi- ja muutamalankainen)			Muokkaa pyöreäksi		
≤ 240 mm² yhteensä		Liitosrasva: esim. Penetrox							
Johtimien asennus				Merkintä				Huom!	
									
Tue liitin kiristyksen ajaksi. Asennettaviin johtimiin ei saa kohdistua vetojännitystä.				5 mm leveä (Esim. Partex TX)				Käytettäessä liitintä keskuksen suojaamaan tai nolajajohtimen kytkennässä, on jokaisella tulevan ja lähtevän johdon suojajohtimella ja nolajajohtimella oltava oma erillinen liittimensä. SFS 6000:2007 kohta 810.7	

Johdintaulukko, polkkipinta-ala ja johtojen määrä / kytkeätila (Al-johtimien määrä sulussa)									
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	Taulukossa olevat johtimien luvut tarkoittavat vain tehdasmaisesti asennettuja liittimiä.	
-	-	-	-	-	-	3 (1)	3 (1)		
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²
			3 (1)	2 (1)	2 (1)	1 (1)	1 (1)	1 (1)	-

Ouneva Oy		
Teollisuustie 21	Tel. +358 400 179 750	www.ounevagroup.fi
FI-82730 Tuupovaara, Finland	info@ouneva.fi	www.ounevaproducts.fi

Product data							
Product code	Product name	I_n Al	I_n Cu	U_n	US specific		
					I_{max} Al	I_{max} Cu	U_{max}
VC05-0034	OTL-connector 1xAl/Cu 35-240mm ² (Grey)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0035	OTL-connector 1xAl/Cu 35-240mm ² (Blue)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0036	OTL-connector 1xAl/Cu 35-240mm ² (Yellow/Green)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0477	OTL-connector 1xAl/Cu 35-240mm ² (Red)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V
VC05-0478	OTL-connector 1xAl/Cu 35-240mm ² (Black)	380 A	425 A	1000 V AC / 1500 V DC	310 A	380 A	1000 V

Installation		
Certification and approval	DIN-rail and screw (M5) mounting	
 	DIN-rail mounting Set the connector on DIN-rail. Push until connector locks down.  Removing from DIN-rail Release the plastic snap with a screwdriver. Lift the connector. 	 Use max. Ø5 mm screw.

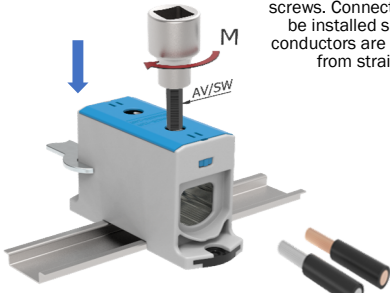Connection						
Screw 	Screw	M20	Tightening torque M	35-120 mm² (250 kcmil-2 AWG)	26 Nm	Stripping length L 
	SW	8		150-240 mm² (500-300 kcmil)	46 Nm	
			Conductor range	1xAl/Cu 35-240 mm²		
Copper conductors	Aluminium conductors		Supported IEC 60228 -conductors			Sector shaped cable
Max. 3 X CU / Conductor contact space  ≤ 240 mm² total	1 X AL / Conductor contact space  Anti-corrosion paste: e.g. Penetrox		 Class 5 & 6 (fine stranded) Using ferrule is recommended Class 1 & 2 (solid and stranded)			 Pre-round the cable
Conductor installation			Marking			Attention!
 Support connector during tightening the screws. Connector must be installed so that conductors are relieved from strain.			 5 mm width (Eg. Partex TX)			 Each protective or neutral conductor must have their own conductor space. SFS 6000:2007 clause 810.7

Cross section and max. number of Cu- conductors / contact space (Al- conductors in parenthesis)									
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	The specified max. amount of conductors refers only to industrially installed terminals.	
-	-	-	-	-	-	3 (1)	3 (1)		
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²
			3 (1)	2 (1)	2 (1)	1 (1)	1 (1)	1 (1)	-