
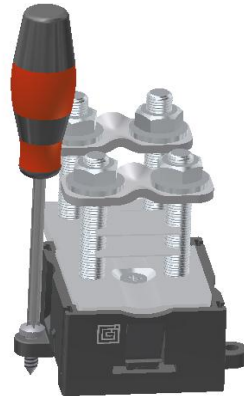


Tuotetiedot

Tuotekoodi	Tuotenimi	I_n Cu	U_n Cu
VG02-0006	Haaroitusalususta Cu 35-150 /16-150 2R	320 A	750 V


Asennus

Asennustapa	DIN-kisko- ja ruuvikiinnitys
-------------	-------------------------------------

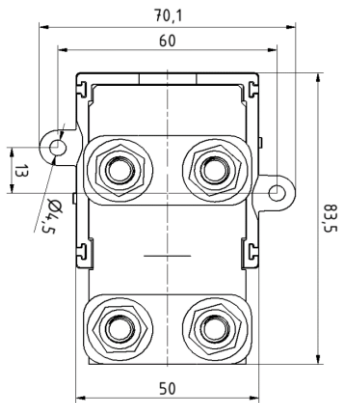


Asennus ruuvikiinnityksellä

Max. Ruuvi Ø 4,5

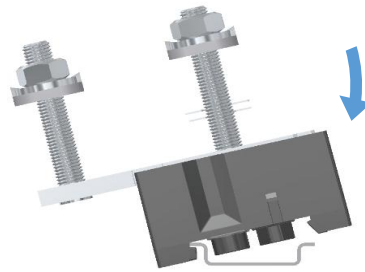

Asennus DIN-kiskoon

Aseta liitin kiskon päälle (ks. kuva). Paina, kunnes liitin lukittuu DIN-kiskoon.

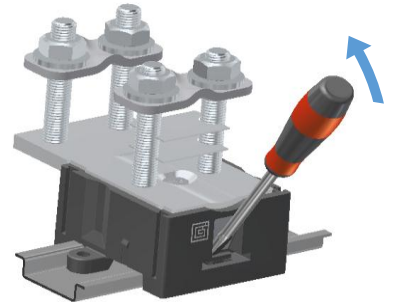


Irroitus DIN-kiskosta

Käännä luistiosa taka-asentoon ruuvimeisselillä. Nosta liitintä, kunnes liitin irtoaa DIN-kiskosta.




Kytkentä

Mutterin koko	Mutteri ₁	M8	Kiristysmomentti M	35-150 mm ²	15 Nm	Kuorintapituus L	22 mm
	AV ₁	13					
			Max. johtimen ala		150 mm²		

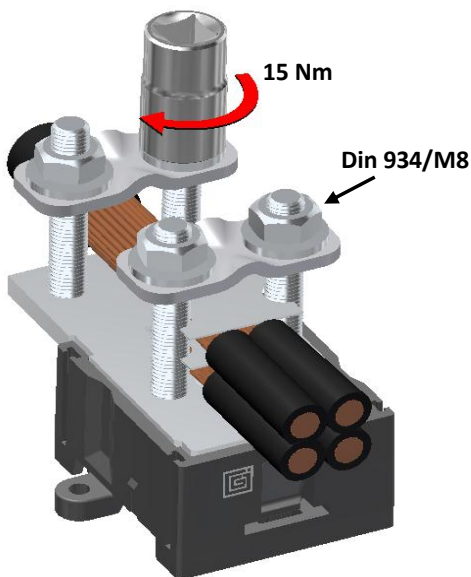

Haaroitusalustaa käytetään kuparijohtimien kytkentään ja haaroitukseen sähkökojeistoissa ja laitteissa. Kaikki mallit voidaan kiinnittää joko ruuvilla tai DIN-kiskoon.

Huom! Asennuksessa saa käyttää ainoastaan kuparisia johtimia.


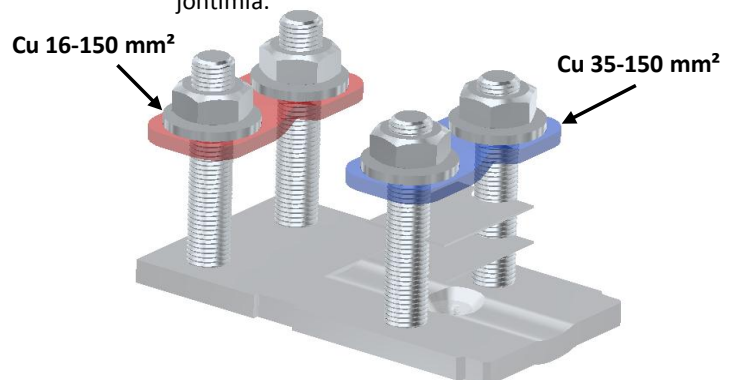


Cu- johtimien poikkipinta-ala ja määrä / liitin


Johtimien pinta-ala ja määrä, mm²								Taulukossa olevat johtimien määrät tarkoittavat vain tehdasmaisesti asennettuja liittimiä.							
2,5 mm²	4 mm²	6 mm²	10 mm²	16 mm²	25 mm²	35 mm²	50 mm²								
-	-	-	-	7	7	7	6								
								70 mm²	95 mm²	120 mm²	150 mm²	185 mm²	240 mm²	300 mm²	400 mm²
								4	3	2	2	-	-	-	-

Product data			
Product code	Product name	I_n Cu	U_n Cu
VG02-0006	Branching block Cu 35-150 /16-150 2R	320 A	750 V


Installation	
Type	DIN-rail and screw mounting

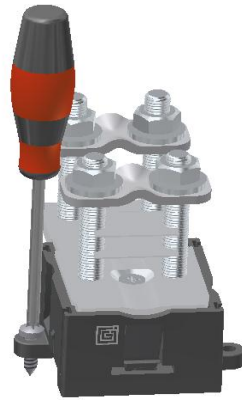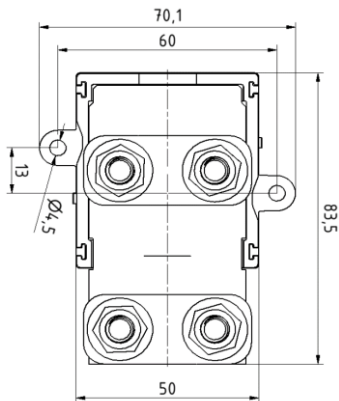


Mounting with screw
Max. $\varnothing$ 4,5




DIN-rail mounting
Set the connector on a DIN-rail (see picture). Push until "click".

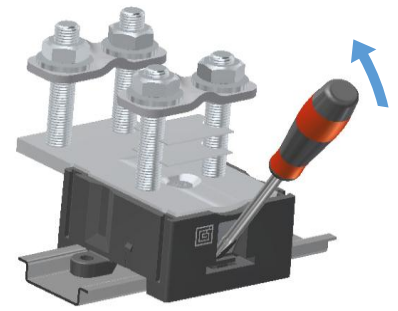


Removing from DIN-rail
Release the lock with a screwdriver and lift the connector.

Connection							
Nut size 	Nut 1	M8	Tightening torque M	35-150 mm ²	15 Nm	Stripping length L	22 mm
	Sw1	13					
			Max. cable		150 mm²		

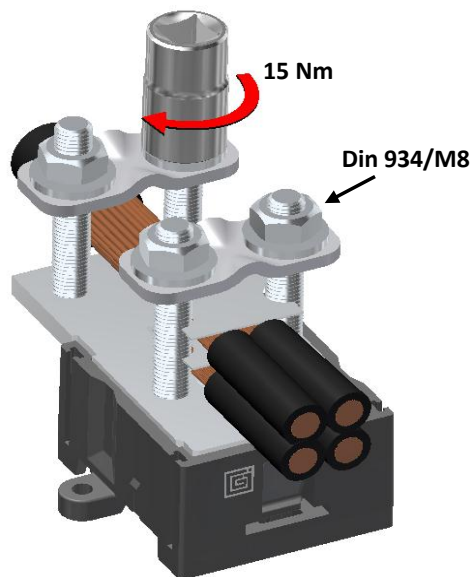

Terminal plate is designed for branching and connecting copper conductors in distribution boards and equipment.

Note! It is only allowed to use copper conductors.

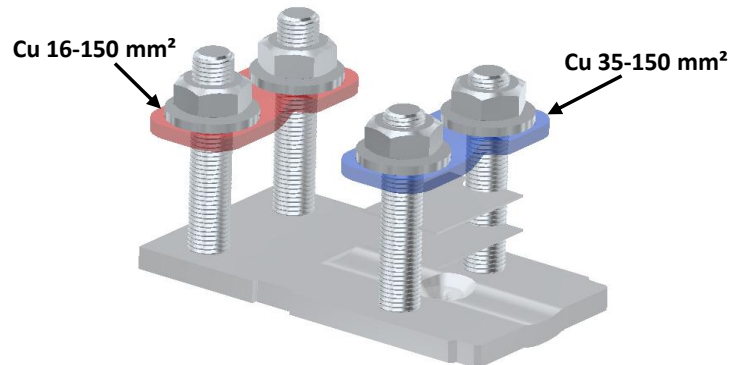

Cross-section and max. amount of Cu- conductors / connector										
2,5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	Note! The specified max. amount of conductors refers only to industrially installed terminals.		
-	-	-	-	7	7	7	6			
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
			4	3	2	2	-	-	-	-