



BAT series

Montavimo instrukcija / Mounting instruction





Tik kvalifikuotas personalas gali atlikti šviestuvo montavimą ir pajungimą.


The installation has to be carried out by an electrician or by any similarly qualified person.

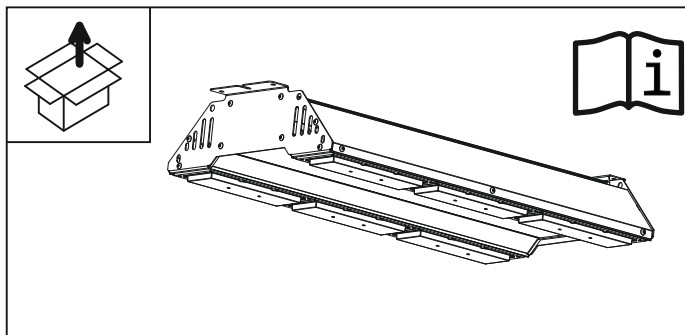

		CCT	CRI	A, mm	B, mm	KG
BAT160	160W	3000 - 6500K	70; 80; 90	362	419	3,9
BAT200	200W	3000 - 6500K	70; 80; 90	535	592	5,4
BAT240	240W	3000 - 6500K	70; 80; 90	535	592	5,6
BAT300	300W	3000 - 6500K	70; 80; 90	708	765	7,2


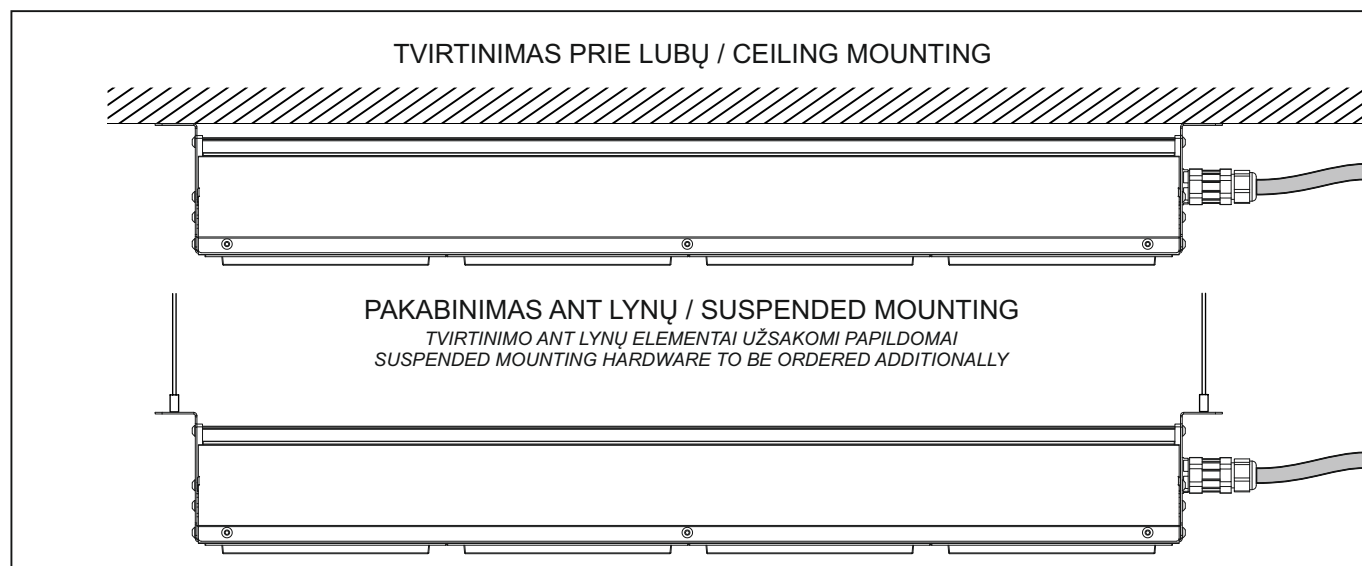
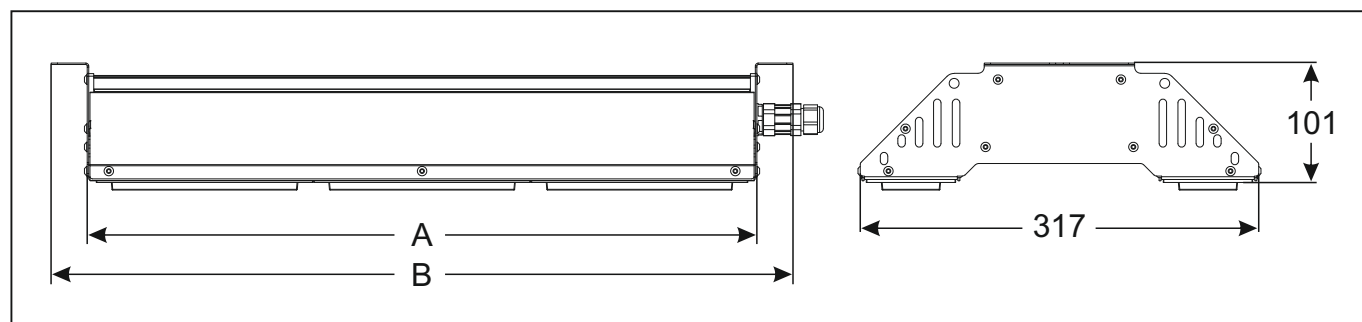


Automatic circuit breaker type	B10	B16	B20	C10	C16	C20	Inrush current	
Installation Ø	1.5 mm²	2.5 mm²	2.5 mm²	1.5 mm²	2.5 mm²	2.5 mm²	I _{max}	Time
BAT160 160W	11	16	18	15	22	25	25 A	210 µs
BAT200 200W	9	13	15	13	19	21	25 A	210 µs
BAT240 240W	5	10	11	10	14	17	171 A	140 µs
BAT300 300W	3	5	7	6	10	12	214 A	180 µs

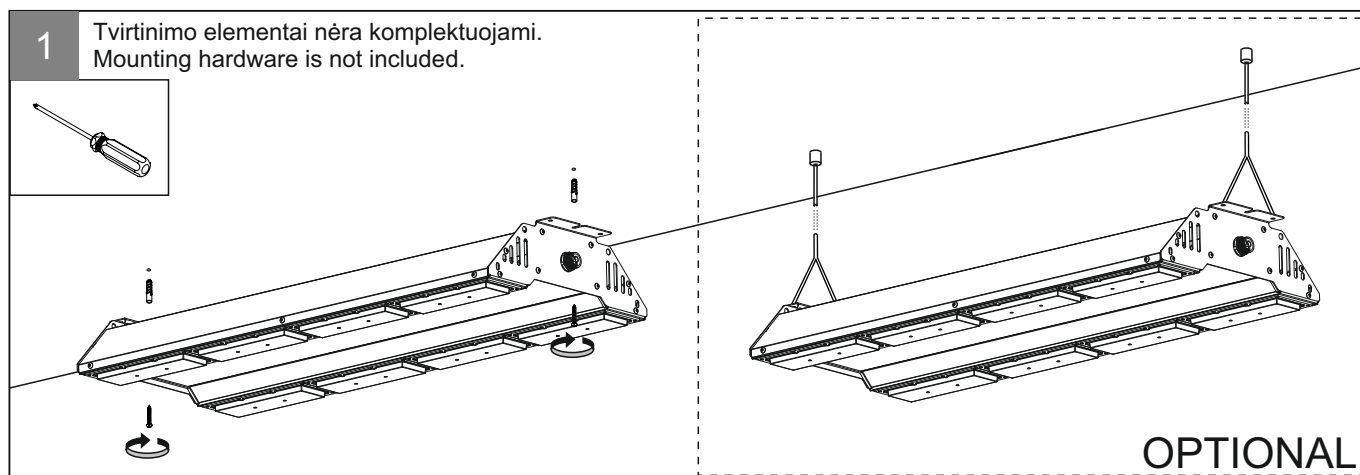


Kabelio prijungimas / Cable connection

Versija su greitąja jungtimi / Option with quick connector

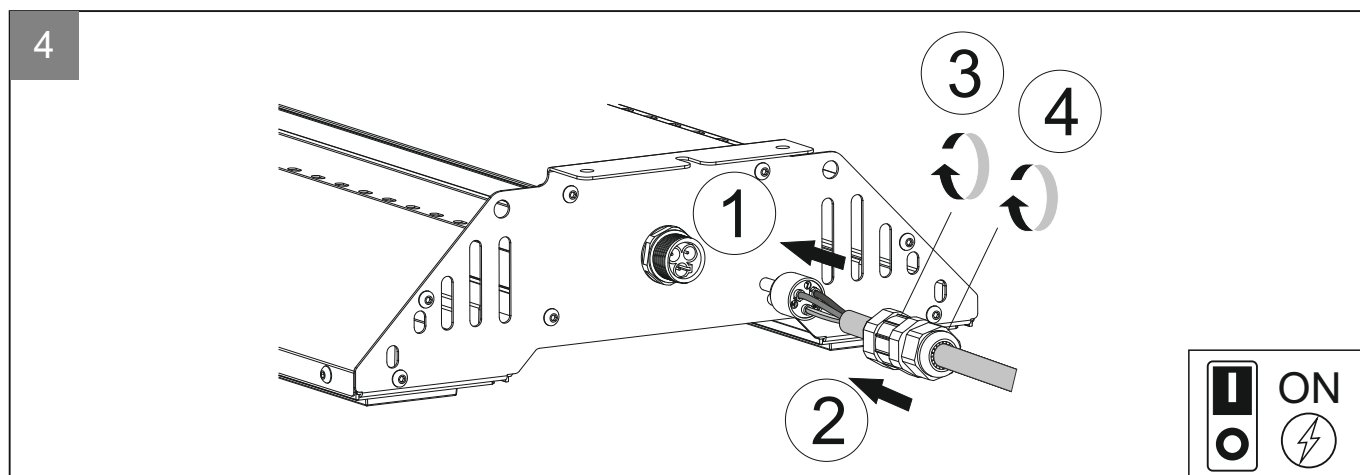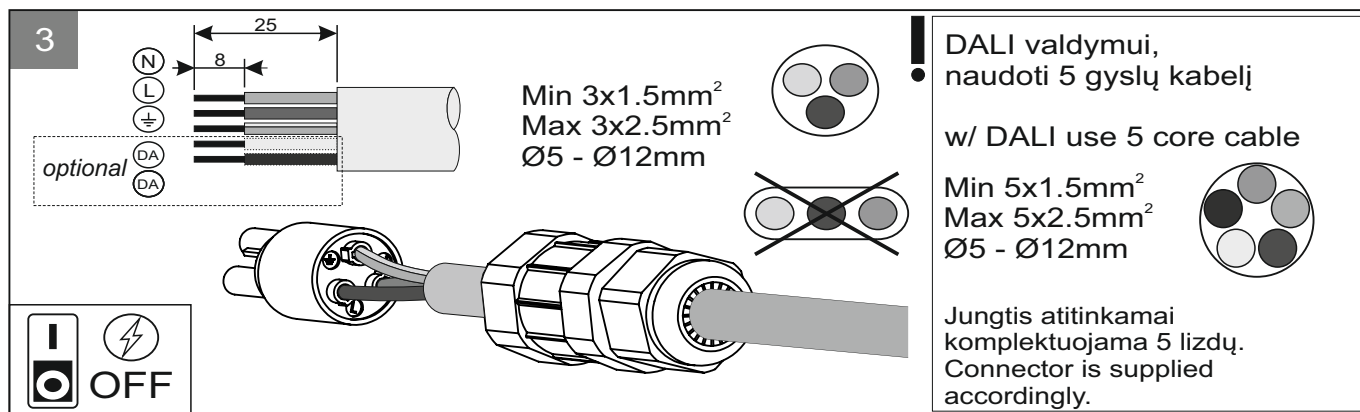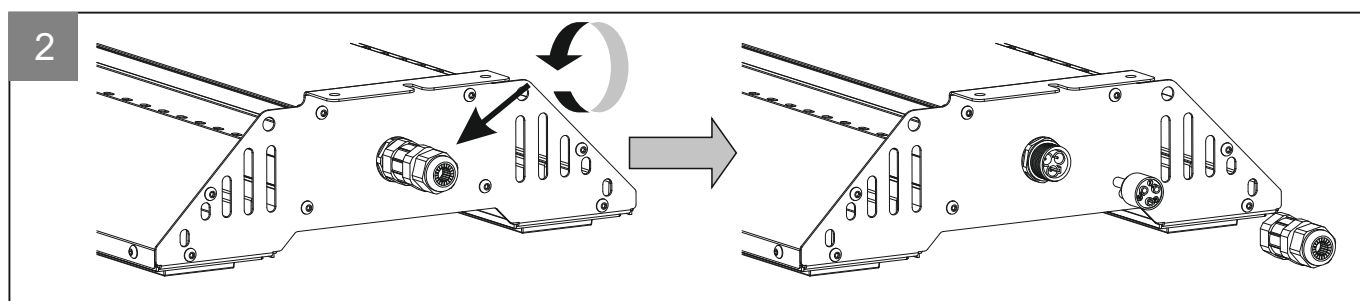

5

Versijai su išvestu kabeliu.
For version with outgoing cable.

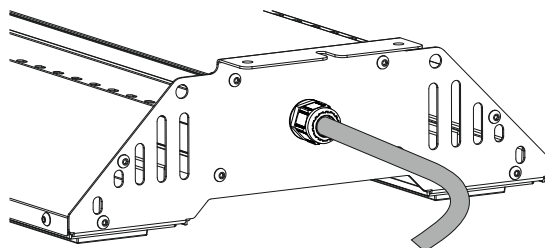

6

Prijungimas / Wiring

Jungiama prie 230-240 V įtampos, 50-60 Hz tinklo.

- Geltonas/Žalias laidas, PE
- Rudas laidas, L
- Mėlynas laidas, N
- Juodas laidas, DALI / DIM L
- Pilkas laidas, DALI / DIM N


Should be connected to 230-240V , 50-60 Hz net.

- Yellow/Green wire, PE
- Brown wire, L
- Blue wire, N
- Black wire, DALI / DIM L
- Grey wire, DALI / DIM N


Rudas / Brown
Mėlynas / Blue
Geltonas/Žalias
Yellow/Green

Rudas / Brown
Mėlynas / Blue
Juodas / Black
Pilkas / Grey
Geltonas/Žalias
Yellow/Green

ON - OFF

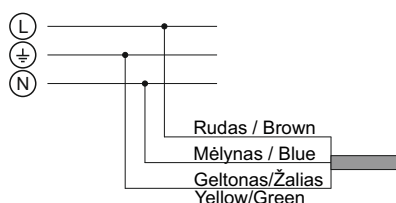

DALI

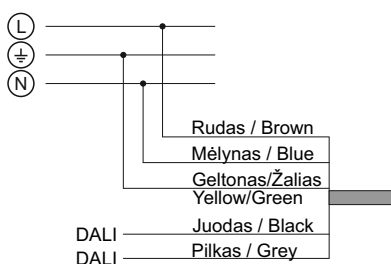

SwitchDIM / corridorFUNCTION

