

LED STREET LAMPS LCS38

20W
40W
60W



Long Life 10 years OK	Enclosed OK	100-277VAC 50-60Hz	PF ≥ 0.9	CRI ≥ 80	180°	IP64	5 years warranty	LED 2835	IES	UL LISTED (LED LAMP) E364363	LM80	LM79
--------------------------	----------------	-----------------------	-------------	-------------	------	------	------------------	-------------	-----	------------------------------	------	------

Specifications


Model No.	Power	led Qty	PF	CRI	Voltage	CCT	Lumen	Size mm	Operation temp (°C/°F)	Weight (lbs=kg*2.2)	Certificate	Equal to
LCS38	20W ± 10%	96leds 2835	≥ 0.9	≥ 80	100-277VAC 50~60Hz	2700-6500K	3000 ± 200lm	E27 Φ92*131 E40 Φ92*148	minus 40~60°C minus 40~140°F	NW0.46 kg GW0.58 kg	CE ROHS LM80 DCL cUL/UL LM79	100W HPS MHL
LCS38	40W ± 10%	192leds 2835	≥ 0.9	≥ 80	100-277VAC 50~60Hz	2700-6500K	6000 ± 200lm	E27 Φ92*198 E40 Φ92*215	minus 40~60°C minus 40~140°F	NW0.76 kg GW0.90 kg	CE ROHS LM80 DCL cUL/UL LM79	200W HPS MHL
LCS38	60W ± 10%	294leds 2835	≥ 0.9	≥ 80	100-277VAC 50~60Hz	2700-6500K	9000 ± 200lm	E27 Φ92*253 E40 Φ92*272	minus 40~60°C minus 40~140°F	NW 1.02 kg GW1.18 kg	CE ROHS LM80 DCL cUL/UL LM79	250W HPS MHL

Features

2835 150lm/W




350 degree twistable



Flame retardant material



180 degree beam angle



Application



Wall pack



Shoe box



Canopy



Low bay



Area light



Cobra Head



Before




After



Installation

Lamp Installation

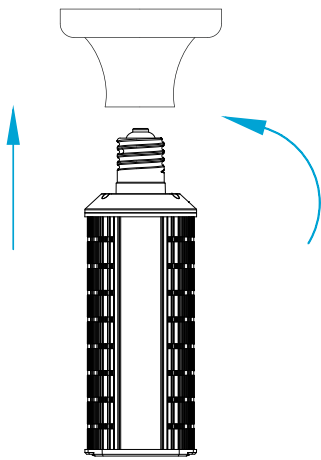

Step:1




Shown as Figure 1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner.
(North America 100-277VAC)

Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder.
(North America 100-277VAC)

Step:3

Shown as Figure 3
Install new LED replacement lamp. Please make sure the old fitting is correctly earth.
(North America 100-277VAC)

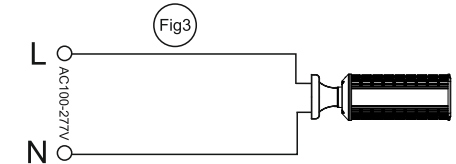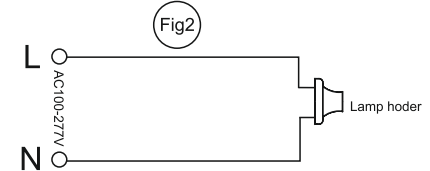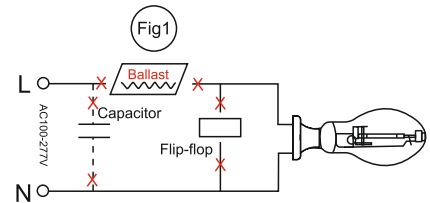

Support Stand Installation

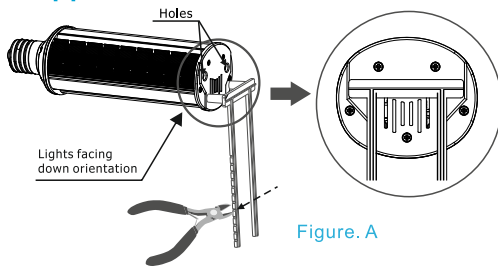


Figure. A

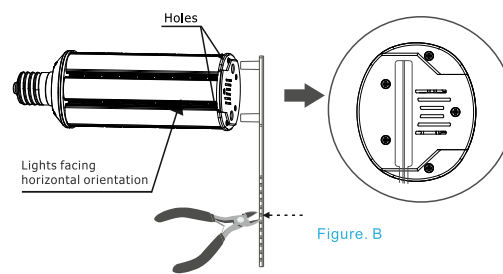


Figure. B

Instructions for two legs stand (shown as figure A):


- Step 1: Screw the lamp onto the socket tightly, then adjust the lamp slightly, make the LEDs side of lamp facing down orientation.
- Step 2: Fix the two legs acrylic stand onto the bottom of the lamp.
- Step 3: Cut off the excess part of the stand.

Instructions for one leg stand (shown as figure B):

- Step 1: Screw the lamp onto the socket tightly, then adjust the lamp slightly, make the LEDs side of lamp facing horizontal orientation.
- Step 2: Fix the one leg acrylic stand onto the bottom of the lamp.
- Step 3: Cut off the excess part of the stand.

Packing

Wattage	Inner box size	N.W per lamp (lbs=kg*2.2)	G.W per box (lbs=kg*2.2)	G.W per Carton (lbs=kg*2.2)	Carton Size	Quantity Per Carton
20W	93*93*190mm	0.46kg	0.58kg	13.97kg	390*296*396mm	24
40W	102*102*258mm	0.76kg	0.90kg	11.0kg	425*322*273mm	12
60W	102*102*305mm	1.02kg	1.18kg	14.21kg	425*322*320mm	

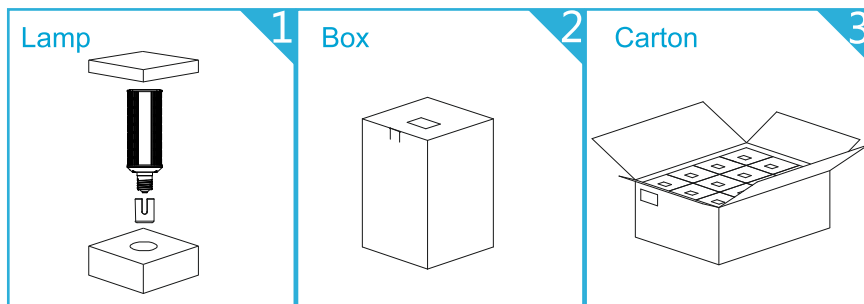


Pack Quantity:

20W:24pcs
40W 60W:12pcs

⚠ CAUTIONS

- Risk of electric shock. Do not use where directly exposed to water.
- Do not use with dimmers, timers, or other control devices.
- 20W 40W 60W are suitable for using in totally enclosed fixtures.
- Don't take apart the lamps without our permit.
- Please read carefully manual before installation.

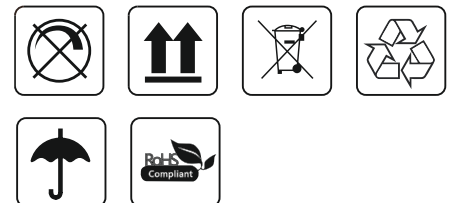

LEDICON FINLAND OY
Keilaranta 1, 02150 Espoo
www.ledvalotukku.fi
asiakaspalvelu@ledvalotukku.fi