
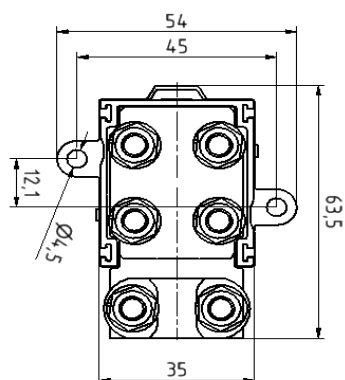



Tuotetiedot

Tuotekoodi	Tuotenimi	I_n Cu	U_n Cu
VG02-0001	Haaroitusalus Cu 2,5-70/6-70	270 A	750 V

Asennus


Asennustapa **DIN-kisko- ja ruuvikiinnitys**


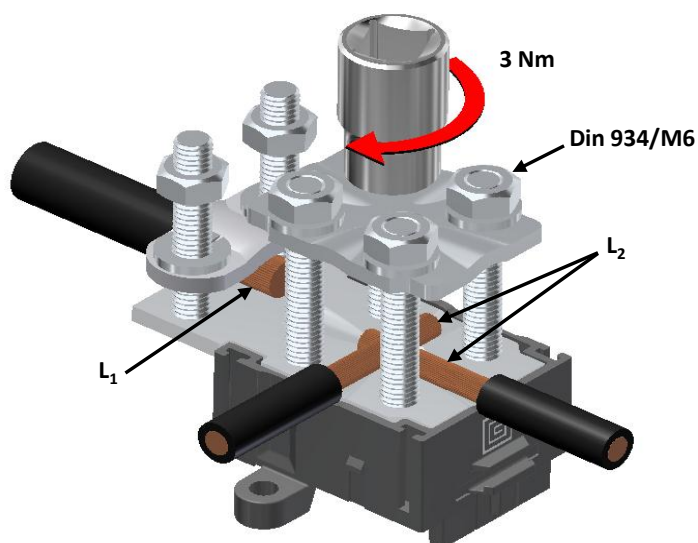
Asennus DIN-kiskoon
Aseta liitin kiskon päälle (ks. kuva). Paina, kunnes liitin lukittuu DIN-kiskoon.

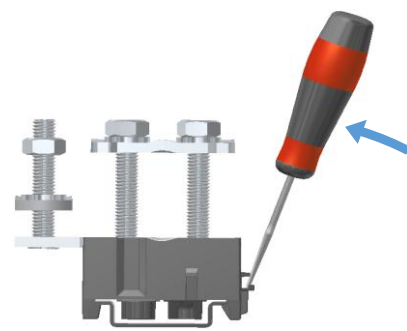

Irroitus DIN-kiskosta
Käännä luistiosa taka-asentoon ruuvimeisselillä. Nosta liitintä, kunnes liitin irtaantuu DIN-kiskosta.



Kytkeä

Mutterin koko	Mutteri 1	M6	Kiristysmomentti M	2,5-70 mm ²	3 Nm	Kuorintapituus L ₁	18 mm
	AV ₁	10					L₂ 25-35 mm
							
				Max. johtimen ala	70 mm²		



Haaroitusalusaa käytetään kuparijohtimien kytkeä ja haaroitukseen sähkökojeistoissa ja laitteissa. Kaikki mallit voidaan kiinnittää joko ruuvilla tai DIN-kiskoon.


Huom! Asennuksessa saa käyttää ainoastaan kuparisia johtimia.

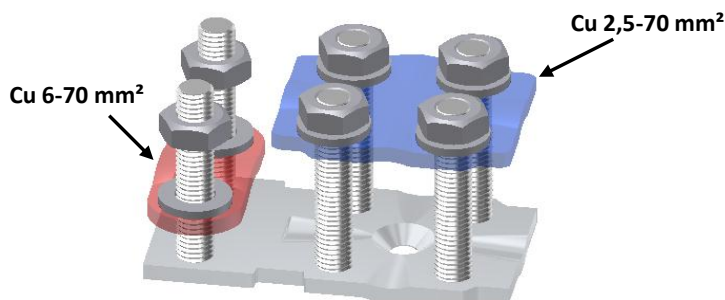
Cu- johtimien poikkipinta-ala ja määrä / liitin


2,5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	Taulukossa olevat johtimien määrät tarkoittavat vain tehdasmaisesti asennettuja liittimiä.		
4	7	7	7	7	6	4	3			
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
			2	-	-	-	-	-	-	-

Product data			
Product code	Product name	I_n Cu	U_n Cu
VG02-0001	Branching block Cu 2,5-70/6-70	270 A	750 V


Installation	
Type	DIN-rail and screw mounting

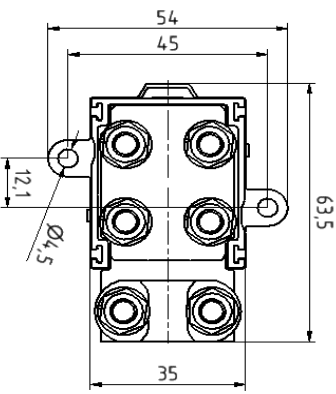

Mounting with screw
Max. Ø 4,5





DIN-rail mounting
Set the connector on a DIN-rail (see picture).
Push until "click".

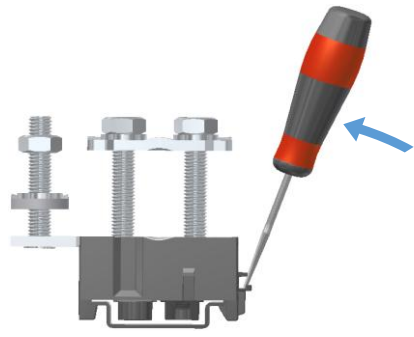

Removing from DIN-rail
Release the lock with a screwdriver and lift the connector.


CE RoHS FI

Connection							
Nut size 	Nut n_1	M6	Tightening torque M	2,5-70 mm ²	3 Nm	Stripping length L_1	18 mm
	Sw n_1	10				L_2	25-35 mm
							
				Max. cable	70 mm²		

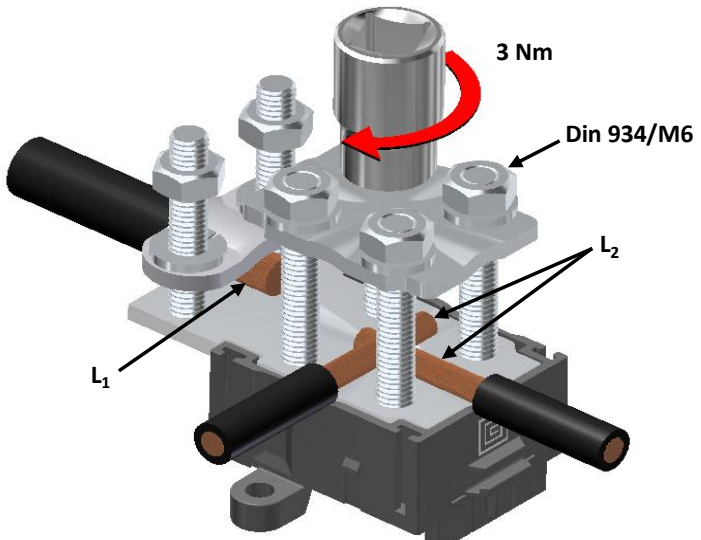


Terminal plate is designed for branching and connecting copper conductors in distribution boards and equipment.

Note! It is only allowed to use copper conductors.



Cu 6-70 mm²

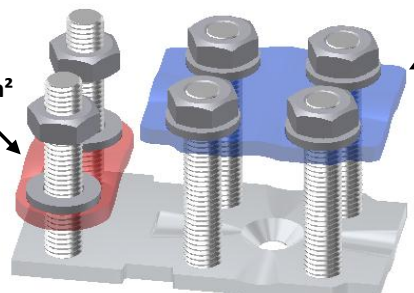

Cu 2,5-70 mm²

Cross-section and max. amount of Cu- conductors / connector									
2,5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	Note! The specified max. amount of conductors refers only to industrially installed terminals.	
4	7	7	7	7	6	4	3		
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²
			2	-	-	-	-	-	-