# Photoelectrics Through-beam Type PMT





- Range: 20 m
- Adjustable sensitivity
- Modulated, infrared light
- Make or break switching function (switch selectable)
- LED-indication for power supply ON (emitter) and target detected (receiver)
- Multi supply voltage:
  12 to 240 VDC and
  24 to 240 VAC, 50/60 Hz
- 25 x 65 x 81 mm reinforced PC housing, IP 67
- Timer options (adjustable)
- NO and NC output

#### **Product Description**

Through-beam photoelectric switch. Range up to 20 m. Adjustable sensitivity. Immune to ambient light. Precise detection through narrow beam. LED-indication. Output function switch selectable. Relay output (NO/NC). Protection

degree IP 67. Screw terminal connection. 25 x 65 x 81 mm plastic housing. PG 13.5 or 1/2" NPT cable gland. Timer options: Delay on operate, delay on release, one shot (triggered on leading or trailing edge).

## Ordering Key P

PMT20 R G T

Type

Receiver

Cable gland

Option: Timer function

### **Type Selection**

Housing W x H x D	Ordering no. Receiver without timer	Ordering no. Receiver with timer	Ordering no. Emitter		
25 x 65 x 81 PG 13.5 cable gland 1/2" NPT cable gland	PMT 20R G PMT 20R I	PMT 20R GT PMT 20R IT	PMT 20 G PMT 20 I		

## **Specifications Emitter**

specifications Emil	ner
Rated operational volt. (U <sub>B</sub> ) AC: 45 to 65 Hz	10.8 to 264 VDC 21.6 to 264 VAC
Rated operational power	≤ 2 W (2.5 VA)
Light source Light type Optical angle	GaAlAs LED, 880 nm Infrared, modulated ±2°
Indication Power supply ON	LED, green

## **Specifications Receiver**

Rated operational volt. (U <sub>B</sub> ) AC: 45 to 65 Hz	10.8 to 264 VDC 21.6 to 264 VAC
Rated operational power (Relay ON)	≤ 2 W (2.5 VA)
Output Contact ratings (AgCdO) Resistive loads AC 1 DC 1 Small inductive loads AC 15 DC 13 Mechanical life Electrical life	µ (micro gap) 3 A/250 VAC 3 A/30 VDC 2 A/250 VAC 3 A/30 VDC ≥ 40 x 10 <sup>6</sup> operations ≥ 5 x 10 <sup>5</sup> operations at 220 VAC - 3 A resistive load: 360 impulses/h
Dielectric voltage	2 kVAC (rms) (cont./supply)
Sensitivity	Adjustable, single turn pot.
Optical angle	±2°
Rated operating dist. (S <sub>n</sub> ) (0 to 5,000 lux)	20 m
Operating frequency (f) Response time OFF-ON (t <sub>ON</sub> ) ON-OFF (t <sub>OFF</sub> )	20 Hz ≤ 20 ms ≤ 20 ms



## **Specifications Receiver (cont.)**

Power ON delay (t <sub>v</sub> )	≤ 300 ms (typ. 100 ms)			
Output function	Switch selectable, make or break switching			
Indication				
Target detected (make swit.)	LED, yellow			
Target not detected (break swit.)	LED, yellow			
Optional timer				
Delay on operate	$0.1 \text{ to } 7 \text{ s} \pm 2 \text{ s}$			
Delay on release	$0.1 \text{ to } 7 \text{ s} \pm 2 \text{ s}$			
One shot	$0.1 \text{ to } 7 \text{ s} \pm 2 \text{ s}$			


## **General Specifications**

Environment	III (IFO 0000 A/0000 AA				
Overvoltage category	III (IEC 60664/60664A,				
Pollution degree	60947-1) 3 (IEC 60664/60664A,				
Degree of protection	60947-1) IP 67 (IEC 60529, 60947-1)				
Temperature					
Operating	-25° to +55°C (-13° to +131°F)				
Storage	-30° to +80°C (-22° to +176°F)				
Vibration	10 to 150 Hz, 0.5 mm/7.5 g				
	(IEC 60068-2-6)				
Shock	2 x 1 m & 100 x 0.5 m				
	(IEC 60068-2-32)				
Rated insulation voltage	250 VAC (rms)				
Housing material					
Body	PC, grey, reinforced				
Front	PC, black				
Cover	PC, black				
Cable gland	PA, black, reinforced				
Mounting bracket	Steel, black				
Connection					
Screw terminal	5 x 2 x 1 mm <sup>2</sup>				
Cable gland	PG 13.5 or 1/2" NPT				
	for cable 6 to 10 mm				
Weight					
Emitter	110 g				
Receiver	115 g				
Approvals	UL, CSA				
CE-marking	Yes				

#### **Truth Table**

	Make s	witching	Break switching		
Object present	Yes	No	Yes	No	
LED	OFF	ON	OFF	ON	
Load	Non- active	Active	Active	Non- active	

## **Connection Diagram**

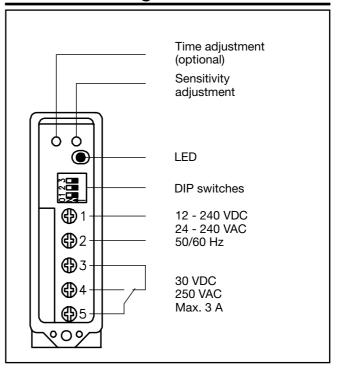

### **Selection of Function**

Switch 1 2 3

PMT 20R .





PMT 20R .T















1 Break switching

2 Make switching

3 Delay on operate -Break switching

4 Delay on operate - Make switching

5 Delay on release -Break switching

6 Delay on release -Make switching

7 One shot, trailing edge - Break switching

8 One shot, trailing edge - Make switching

9 One shot, leading edge -Break switching

10 One shot, leading edge - Make switching

□ Don't care

Upper position ON (Mode 1) Lower position OFF (Mode 0)




## **Operation Diagram**

t = Time delay tv = Power ON delay

Power supply								
Target present								
Object present								
Func 1. Output ON	⊢tv⊣							
Func 2. Output ON					⊢tv⊣			
Func 3. Output ON	⊢tv⊣	⊢ t ⊣						⊢ t ⊣
Func 4. Output ON		⊢ t ⊣		Ht- Ht-	⊢tv⊣		Ht- Ht-	⊢ t →
Func 5. Output ON	⊢tv⊣		⊢ t ⊣_	⊦t-		⊢ t ⊣	+t-	
Func 6. Output ON			<u>⊢ t ⊣</u>	⊦t-	⊢tv⊣	⊢ t ⊣	⊢ t ⊣	
Func 7. Output ON	⊢tv⊣		<u>⊢ t ⊣</u>	<u></u> ⊢ ⊢ t ⊣	⊢tv⊣	_	<u></u> ⊢ ⊢ t ⊣	
Func 8. Output ON			⊢ t	⊢ ⊢ t ⊣		⊢ t ⊣	⊢ ⊢ t ⊣	
Func 9. Output ON	⊢tv⊣	_		<u></u> ⊢ ⊢ t ⊣	⊢tv⊣		<u></u> ⊢ ⊢ t ⊣	⊢ t →
Func 10. Output ON		⊢ t ⊣		⊢ ⊢ t ⊣			⊢ ⊢ t ⊢	⊢ t →

### **Dimensions**

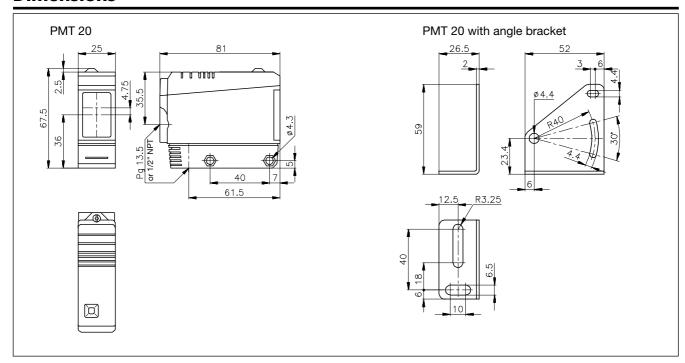

# **Delivery Contents**

- Photoelectric switch: PMT 20
- Cable gland
- Installation instruction
- Mounting bracket
- Packaging: Corrugated cardboard (environmentally friendly recycling material)

### **Accessories**

MB02 (longer mounting bracket), please refer to "Accessories"