

LV HRC fuse element, NH000, In: 20 A, aM, Un AC: 500 V, Un DC: 440 V, Front indicator, live grip lugs



Model	
Product brand name	SETRON
Product designation	LV HRC fuse link
Design of the product	With blade contacts
Design of an identification indicator	Front indicators
Design of the switching contact	Non-corroding, silver-plated
Design of the fuse link	LV HRC fuse link

General technical data	
Size of fuse system / acc. to DIN EN 60269-1	NH000
circuit-breaker / Design	3ND
Type of voltage	AC
Current / at AC / rated value	20 A
Supply voltage	500 V
• at AC / rated value	

Protection class	
Protection class IP	IP20, with connected conductors

Switching capacity	
Switching capacity current	

- acc. to IEC 60947-2 / rated value

120 kA

## Dissipation

Power loss [W]	1 W
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	1 W

## Current

Tripping residual / rated value / derated current / at 40 Cel	19 A
---	------

## Mechanical Design

Width	
• of the enclosure	21 mm
Mounting position	Any, preferably vertical
Net weight	118 g

## Environmental conditions

Ambient temperature	
• minimum	-5 °C
• maximum	40 °C
Ambient temperature / during storage	Air humidity 90% at 20 °C
Environmental category	-20 to +50 at 95% relative humidity

## Certificates

Reference code	
• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F

Declaration of Con- formity	Test Certificates	other
--------------------------------	-------------------	-------



EG-Konf.

[Special Test Certificate](#)

[Type Test  
Certificates/Test Report](#)

[Environmental Confirma-  
tions](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ND1807>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3ND1807>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3ND1807](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3ND1807)

**CAX-Online-Generator**

<http://www.siemens.com/cax>


**Tender specifications**

<http://www.siemens.com/specifications>

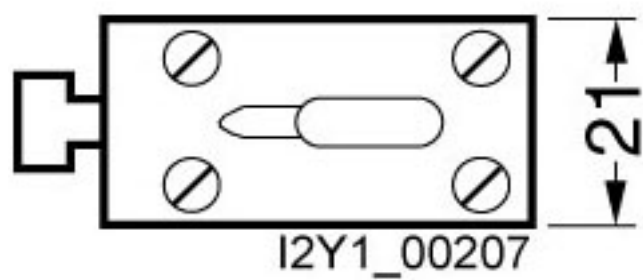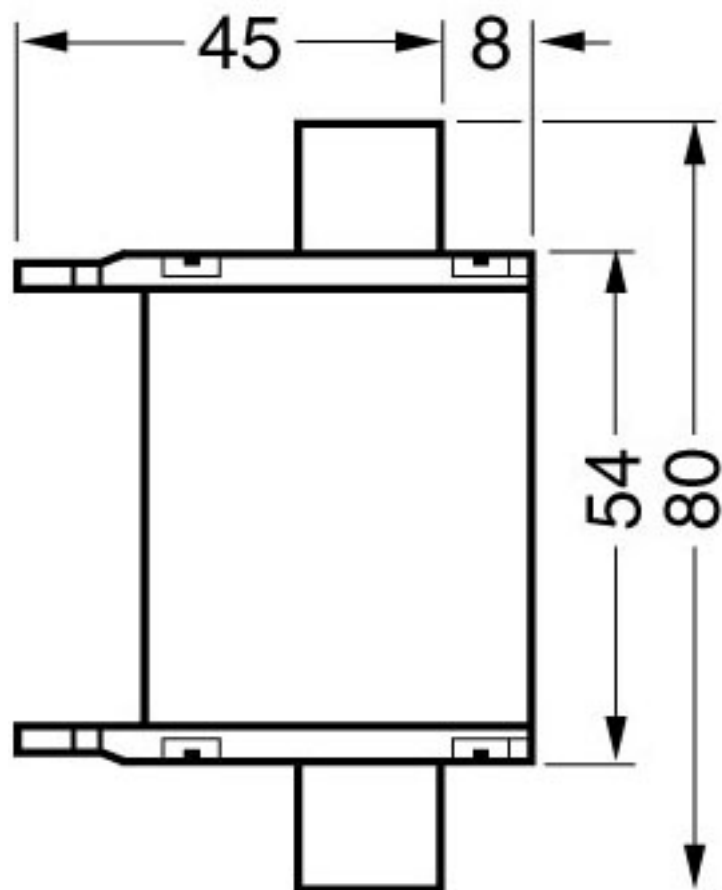

1

-F1



2

