



A	B	C	D	E	F	G	H	J	K				
INSTRUKTIONER TILL ANVÄNDARE AV TILFÄLLIGA ELEKTRISKA ANLÄGGNINGAR 1. Anläggningen skall skötas av behörig person, som ansvarar för driften. Felaktig användning av den elektriska anläggningen kan medföra person- och brandfara. 2. Centralen skall placeras lodrät alternativt på stativ och med fri betjäningsyta framför centralen. 3. Fasta anslutningar av kablar och byte av säkringar skall endast utföras av fackfolk. Vid fast anslutning av gummikablar skall dragavlastningens klämyta vara utförd i isolermaterial. Icke fackfolk får endast manövrera jordfelsbrytare, dvärgbrytare samt uttag för stickproppar. 4. Centralens dörrar skall vara stängda och där det erfordras även låsta. Dörrarna skall endast öppnas vid betjäning av centralen. 5. Elektriska apparater som är anslutna till centraler skall fränkopplas eller göras spänningslösa när de inte används, för att undvika oavsiktlig igångsättning eller användning av dessa. 6. Elektriska apparater som används skall uppfylla föreskrifterna och skall antingen vara utförda med extra isolering eller i klass I utförande med jordad stickpropp. 7. Kablar såväl innanför som utanför dörrarna skall förläggas på ett sådant sätt att de inte skadas. 8. Kablar eller apparater med fel skall fränkopplas och inte tas i bruk igen förrän felaktiga delar är utbytta eller reparerade. 9. Knivsäckring får endast bytas av instruerad personal.									ARTIKELNR / ARTICLE NO. EB11694				
									MÄRKSTRÖM/ CURRENT RATING 63 A				
									SPÄNNING/ VOLTAGE 400 V				
									MEASURING EQUIPMENT CURR- TRAFO- SPACEENERGY- METER- SPACE				
									FAST ANSLUTNING/ FIXED CONNECTIONS <125A>125A				
									CEE-OUTLETS 3-POLE 16A32A63A125A				
									SCHUKO OUTLETS 16A 6				
									CEE-OUTLETS 4-POLE 16A32A63A125A				
									CEE-OUTLETS 5-POLE/400V 16A32A63A125A 321				
									JFB/RCD/RCBO 0,01A0,03A0,1A 2				
									JFB/RCD/RCBO 0,3A0,5AVariable 1				
									VIKT/WEIGHT 24 kg				
This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.					U 63CM//6321-201 EN		 www.elbjorn.com		RITAD AV/DRAWN BY CG SIGN	DATUM/DATE 181221 REVISION/ISSUE B	NEXT SHEET 2	SHEET 1	RITINGS NR./DRAWING EB11694

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

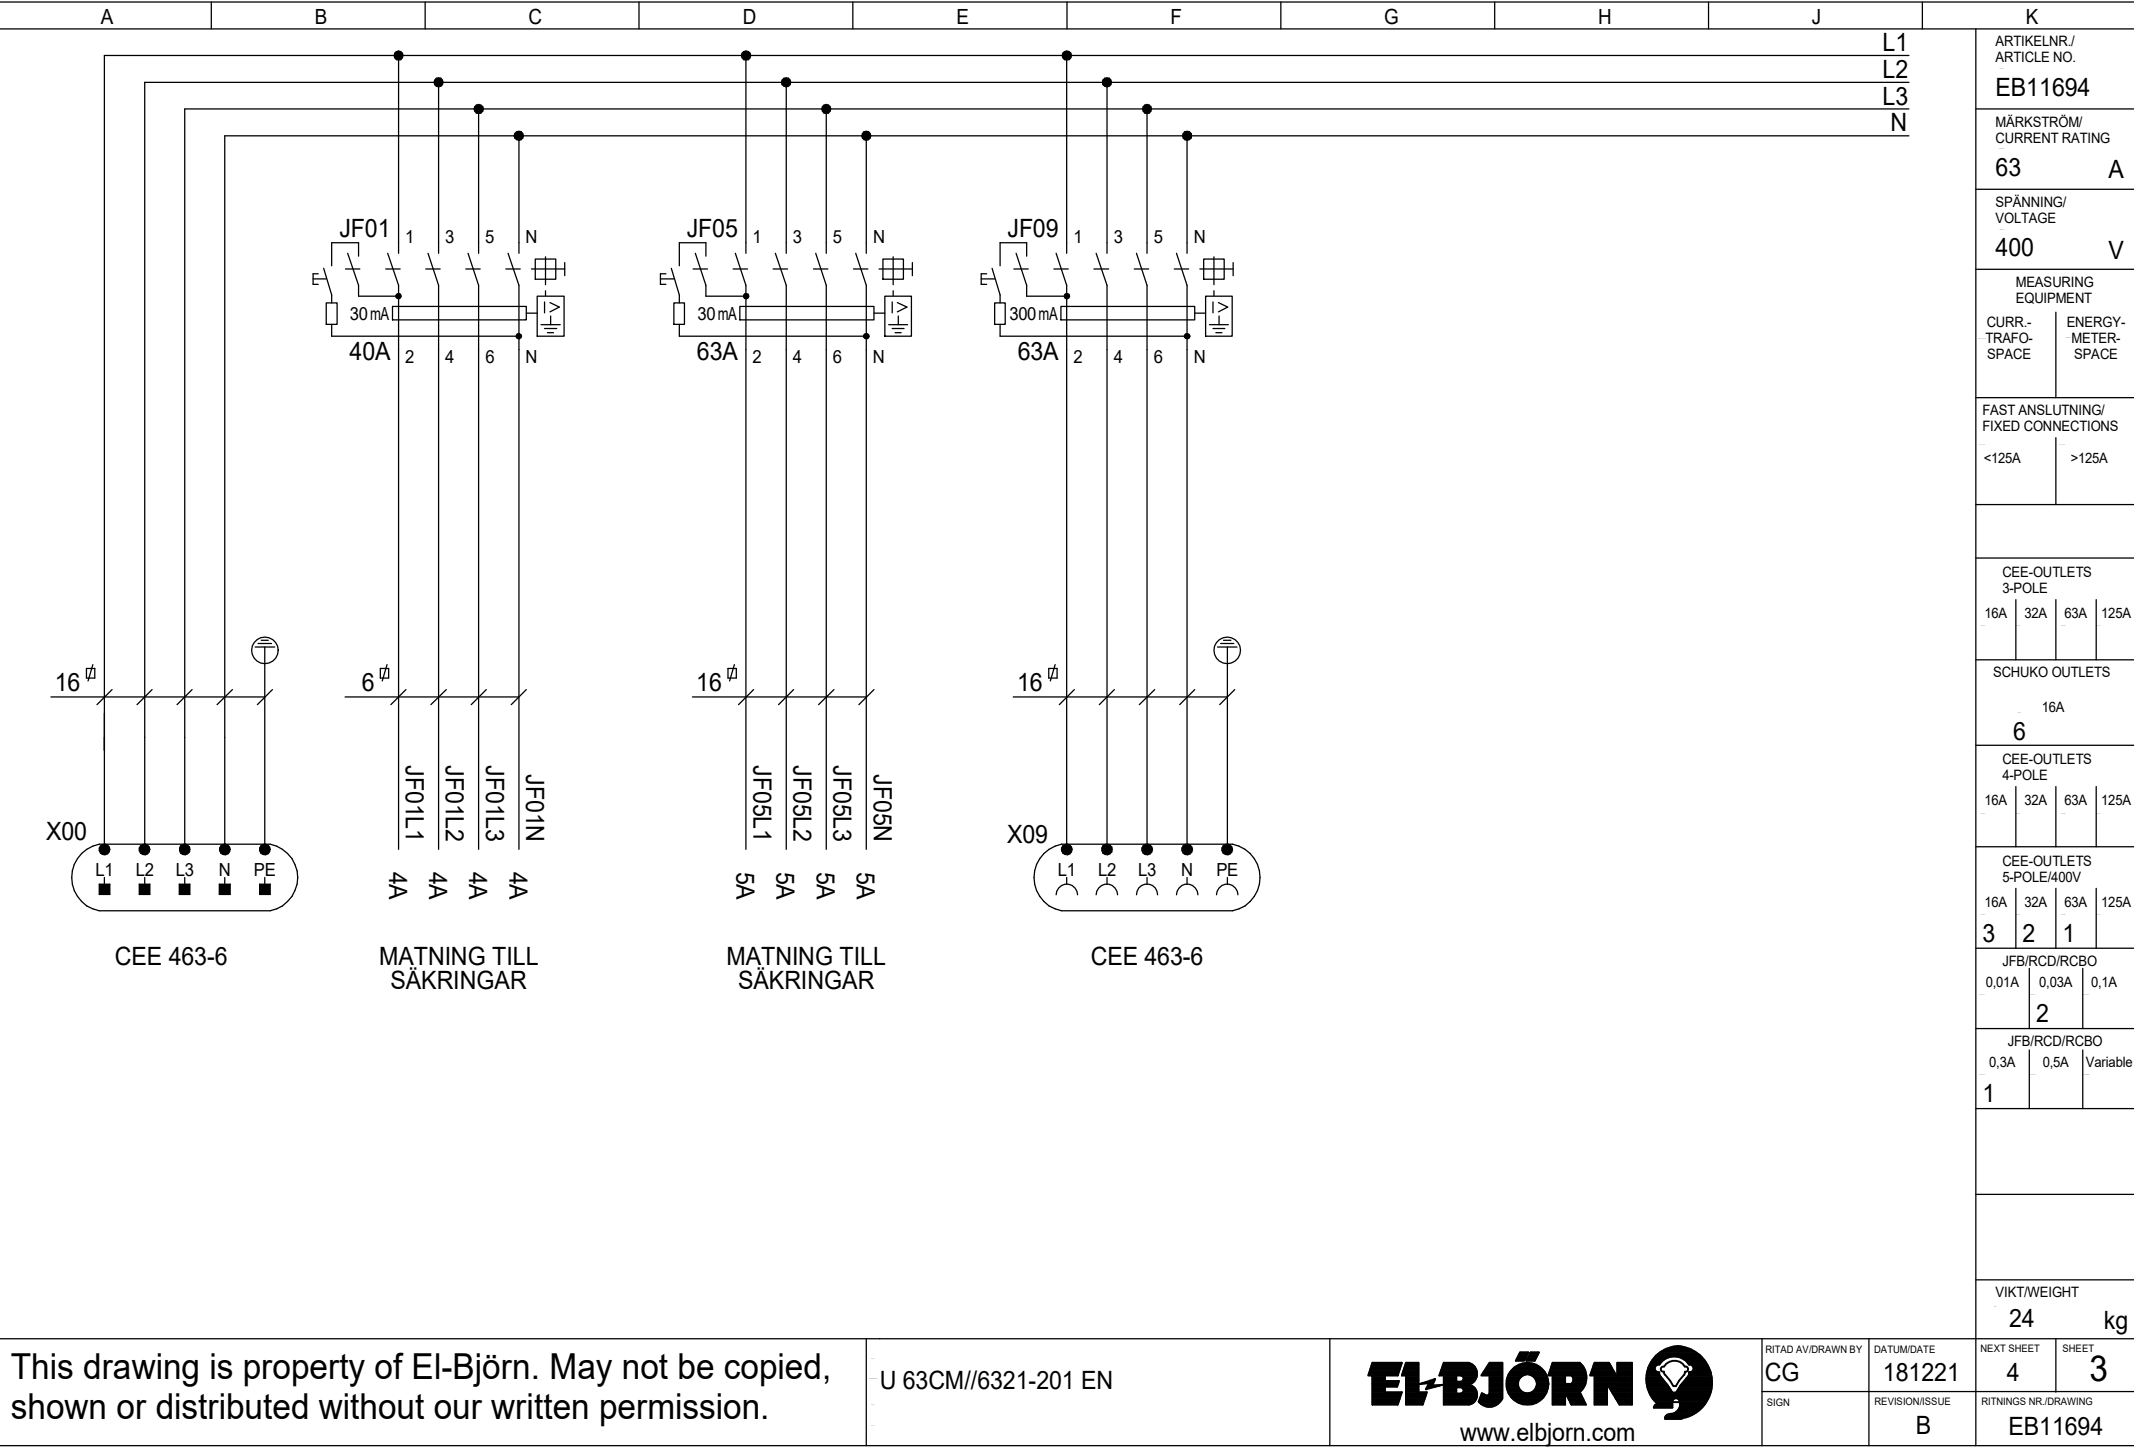

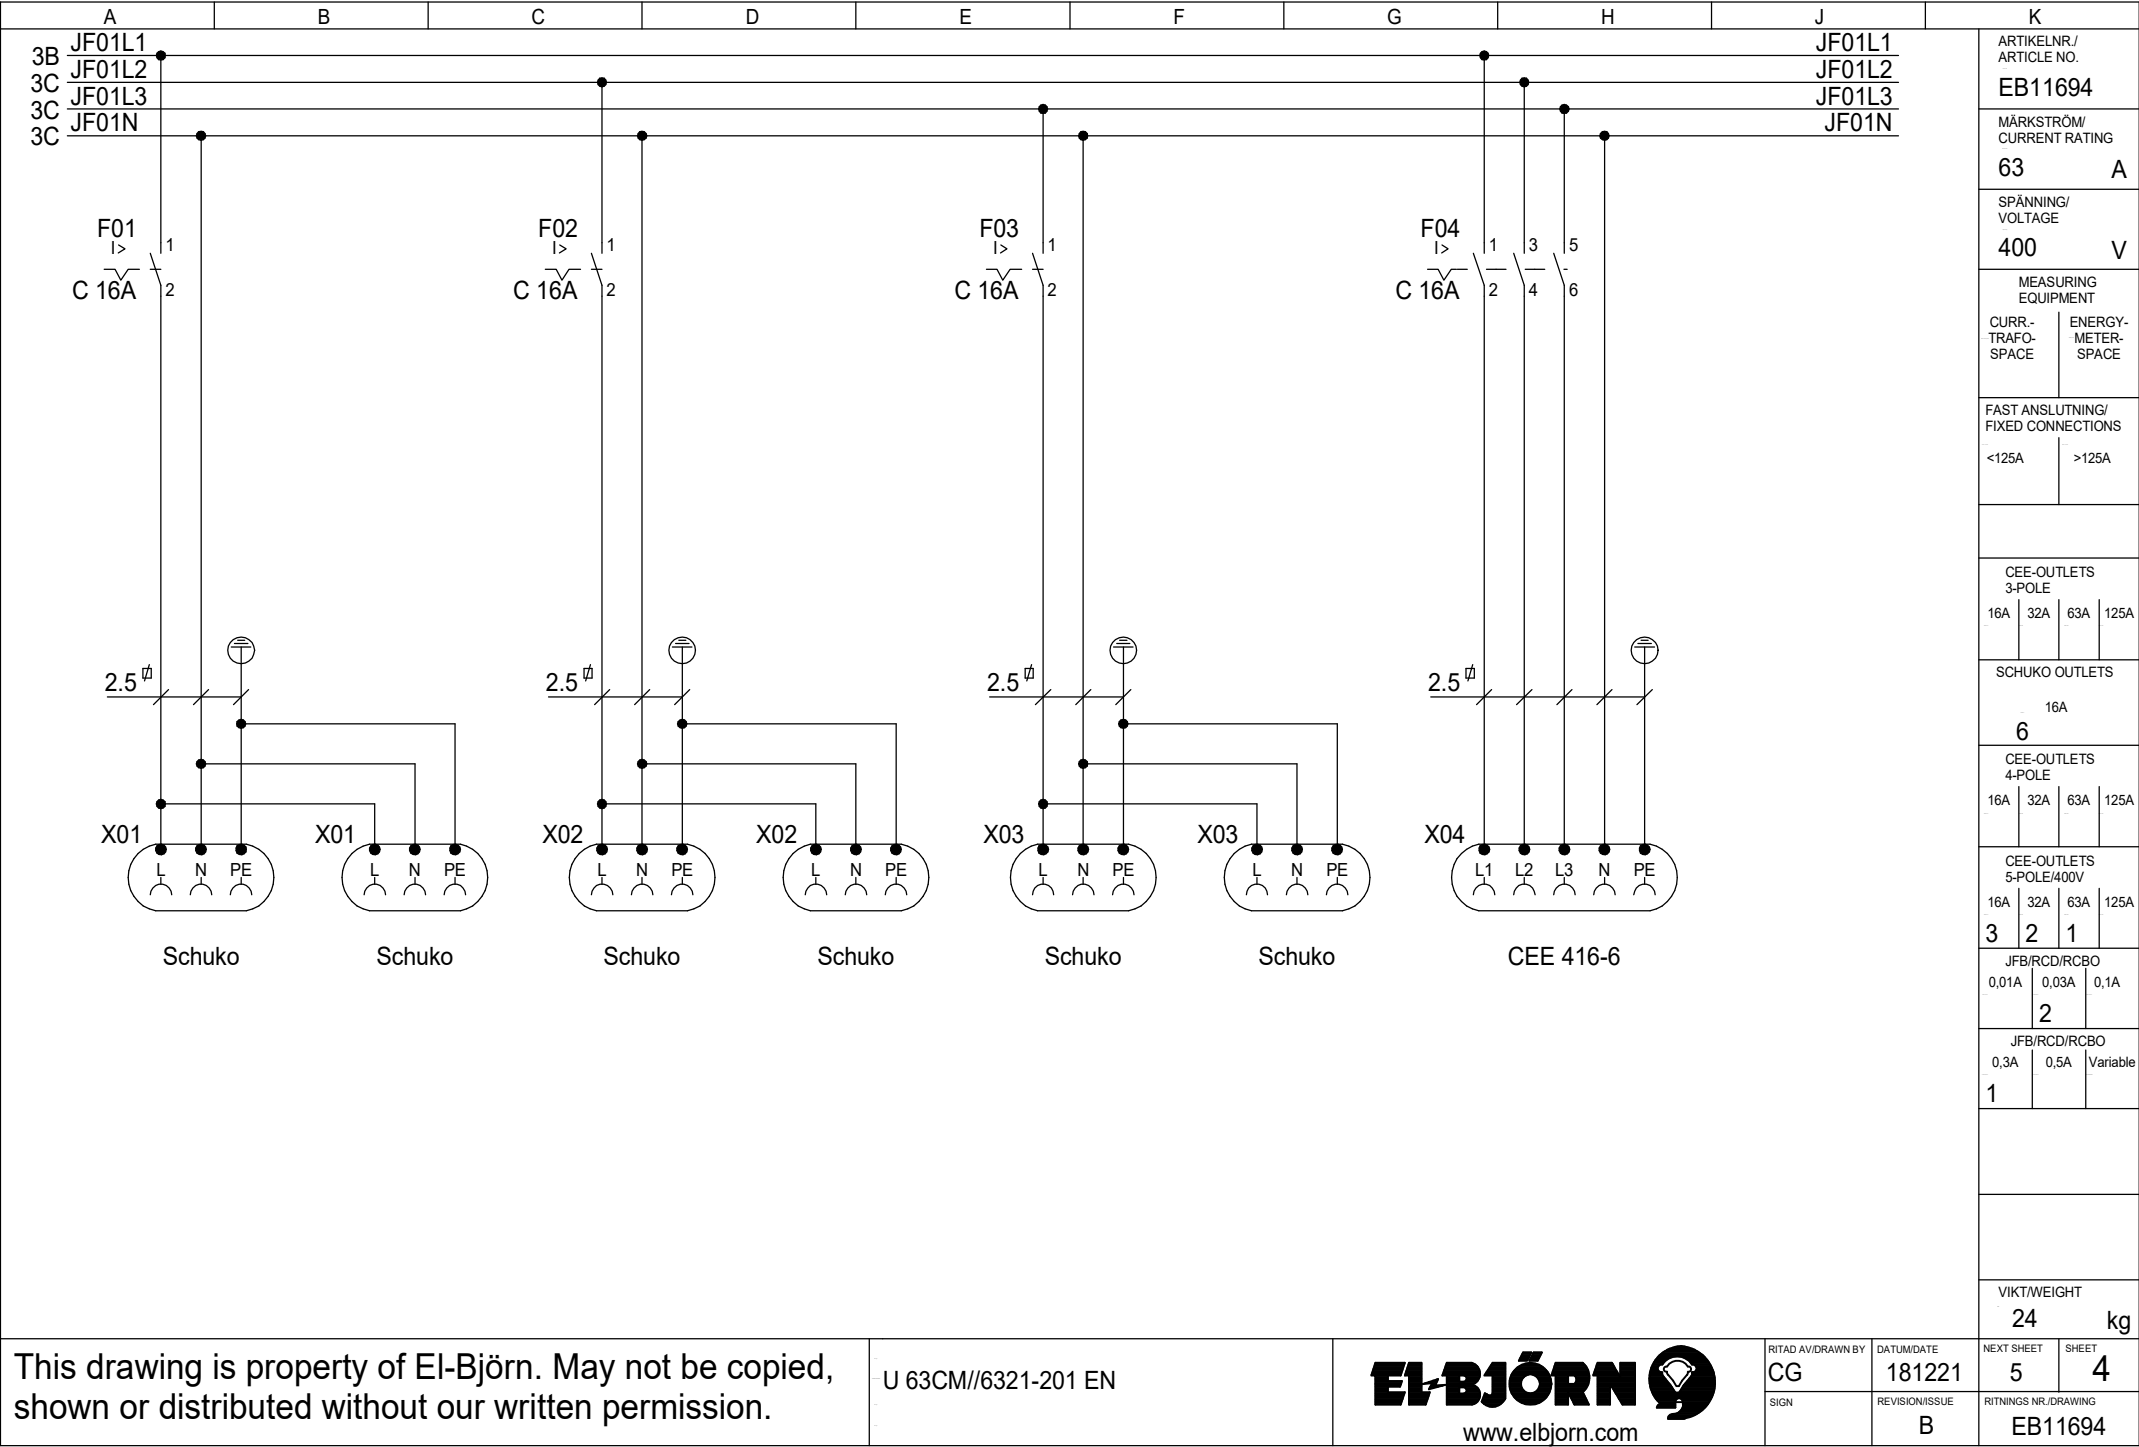

A		B		C		D		E		F		G		H		J		K		
3D	JF05L1															JF05L1		ARTIKELNR/ ARTICLE NO. EB11694		
3D	JF05L2															JF05L2				
3D	JF05L3															JF05L3				
3E	JF05N															JF05N				
F05 I>		F06 I>		F07 I>		F08 I>												MÄRKSTRÖM/ CURRENT RATING 63 A		
C 16A		C 16A		C 32A		C 32A														
1 3 5 2 4 6		1 3 5 2 4 6		1 3 5 2 4 6		1 3 5 2 4 6														
2.5 $\varnothing$		2.5 $\varnothing$		6 $\varnothing$		6 $\varnothing$														
X05		X06		X07		X08												SPÄNNING/ VOLTAGE 400 V		
L1 L2 L3 N PE		L1 L2 L3 N PE		L1 L2 L3 N PE		L1 L2 L3 N PE														
CEE 416-6		CEE 416-6		CEE 432-6		CEE 432-6														
																		MEASURING EQUIPMENT CURR- TRAFO- SPACE ENERGY- METER- SPACE		
																		FAST ANSLUTNING/ FIXED CONNECTIONS <125A >125A		
																		CEE-OUTLETS 3-POLE 16A 32A 63A 125A		
																		SCHUKO OUTLETS 16A 6		
																		CEE-OUTLETS 4-POLE 16A 32A 63A 125A		
																		CEE-OUTLETS 5-POLE/400V 16A 32A 63A 125A		
																		JFB/RCD/RCBO 0,01A 0,03A 0,1A 2		
																		JFB/RCD/RCBO 0,3A 0,5A Variable 1		
																		VIKT/WEIGHT 24 kg		
																		RITAD AV/DRAWN BY CG SIGN		
																		DATUM/DATE 181221 REVISION/ISSUE B		
																		NEXT SHEET 6 RITINGS NR./DRAWING EB11694		

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

U 63CM//6321-201 EN

EL-BJÖRN

www.elbjorn.com

RITAD AV/DRAWN BY
CG

SIGN

DATUM/DATE
181221

REVISION/ISSUE
B

NEXT SHEET
6

RITINGS NR./DRAWING
EB11694

SHEET
5

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

U 63CM//6321-201 EN



RITAD AV/DRAWN BY CG	DATUM/DATE 181221
--------------------------------	-----------------------------

A		B	C	D	E	F	G	H	J	K	
PC.	Position	Description	Type	Manufacturer	Data	Article No.	E-number(SE)	ARTIKELNR/ ARTICLE NO. EB11694			
1	-	Skåp	Kapsling CM U	El-Björn AB	920x750x310mm	H233003		MÄRKSTRÖM/ CURRENT RATING 63A			
1		Beröringsskydd	M	El-Björn AB		K10001		SPÄNNING/ VOLTAGE 400V			
1		Uttagsplåt	U M	El-Björn AB		K10008		MEASURING EQUIPMENT			
1		Tak	M	El-Björn AB		K10004		CURR- TRAFO- SPACE	ENERGY- METER- SPACE		
1		Täckplåt	3 Schuko	El-Björn AB	50x190, Vit	233116		FAST ANSLUTNING/ FIXED CONNECTIONS			
3	F01-F03	MCB	PLS6-C16	Eaton	6kA, 1P, C 16A	242681	2141469	<125A	>125A		
3	F04-F06	MCB	PLS6-C16/3	Eaton	6kA, 3P, C 16A	242949	2141509	CEE-OUTLETS 3-POLE			
2	F07-F08	MCB	PLS6-C32/3	Eaton	6kA, 3P, C 32A	242952	2141512	16A	32A	63A 125A	
1	JF01	RCD	PFIM-40/4/003-A-SVP	Eaton	40A, 30mA, 4P, A	110781	2162237	SCHUKO OUTLETS			
1	JF05	RCD	PFIM-63/4/003-A-MV	Eaton	63A, 30mA, 4P, A	235443	2162245	16A			
1	JF09	RCD	PFIM-63/4/03-A-MV	Eaton	63A, 300mA, 4P, A	235445	2162249	6			
1	X00	Intag	463BU6	ABB	63A, 400V, IP44	2CMA167234R1000	2417355	CEE-OUTLETS 4-POLE			
6	X01-X03	Schukouttag	Typ F	Mennekes	230V, 16A, IP54	11020EB		16A	32A	63A 125A	
3	X04-X06	Uttag	416RU6	ABB	16A, 400V, IP44	2CMA192642R1000	2416633	CEE-OUTLETS 5-POLE/400V			
2	X07-X08	Uttag	432RU6	ABB	32A, 400V, IP44	2CMA192658R1000	2416660	16A	32A	63A 125A	
1	X09	Uttag	463RU6	ABB	63A, 400V, IP44	2CMA192664R1000	2416680	3	2	1	
								JFB/RCD/RCBO			
								0,01A	0,03A	0,1A	
								2			
								JFB/RCD/RCBO			
								0,3A	0,5A	Variable	
								1			
								VIKT/WEIGHT			
								24	kg		
This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.				U 63CM//6321-201 EN		 www.elbjorn.com		RITAD AV/DRAWN BY	DATUM/DATE	NEXT SHEET	SHEET
								CG	181221		6
						SIGN		REVISION/ISSUE	RITINGS NR./DRAWING		
								B	EB11694		