SIEMENS

Data sheet 3RF2450-1AC45



Solid-state contactor 3-phase 3RF2 AC 51 / 50 A / 40 $^{\circ}$ C 48-600 V / 4-30 V DC 3-phase controlled screw terminal Blocking voltage 1200 V

product brand name
product designation
design of the product
product type designation
manufacturer's article number

- _2 of the accessories that can be ordered product designation
 - _2 of the accessories that can be ordered

SIRIUS

solid-state contactor three-phase controlled

3RF24

3RF2900-0EA18

converter

General technical data

product function power loss [W] for rated value of the current

• at AC in hot operating state

- at AC in hot operating state per pole
- without load current share typical

insulation voltage rated value degree of pollution

type of voltage of the control supply voltage surge voltage resistance of main circuit rated value

shock resistance according to IEC 60068-2-27 vibration resistance according to IEC 60068-2-6 reference code according to IEC 81346-2

Substance Prohibitance (Date)

zero-point switching

160 W

53.33 W 0.9 W

600 V

3

DC

6 kV

15g / 11 ms

2g Q

07/01/2006

Main circuit

number of poles for main current circuit number of NO contacts for main contacts number of NC contacts for main contacts

operating voltage at AC

- at 50 Hz rated value
- at 60 Hz rated value

operating frequency rated value

relative symmetrical tolerance of the operating frequency

operating range relative to the operating voltage at AC

- at 50 Hz
- at 60 Hz

operational current

- at AC-51 rated value
- at AC-51 according to IEC 60947-4-3
- according to UL 508 rated value

operational current minimum

rate of voltage rise at the thyristor for main contacts maximum permissible

3

0

48 ... 600 V

48 ... 600 V

50 ... 60 Hz

10 %

40 ... 660 V

40 ... 660 V

50 A

38 A

38 A

500 mA

1 000 V/µs

	4 000 1/
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
12t value maximum	6 600 A ² ·s
Control circuit/ Control	0 000 A 3
	DC.
type of voltage of the control supply voltage	DC
control supply voltage 1 • at DC rated value	30 V
at DC rated value at DC	4 30 V
	4 50 V
control supply voltage	4 V
at DC full seeds value for signal <1> detection at DC full seeds value for signal <0> recognition	1 V
 at DC full-scale value for signal<0> recognition symmetrical line frequency tolerance 	5 Hz
control current at minimum control supply voltage	JIIZ
• at DC	22 mA
control current at DC rated value	30 mA
ON-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	, additionally man, one half mare
	0
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	F
fastening method	screw fixing Yes
side-by-side mounting design of the thread of the core for accuring the	res M4
design of the thread of the screw for securing the equipment	IVI4
height	150 mm
width	119.5 mm
depth	130 mm
Connections/ Terminals	
Connections/ Terminals type of electrical connection	
type of electrical connection	screw-type terminals
type of electrical connection • for main current circuit	screw-type terminals screw-type terminals
type of electrical connection	screw-type terminals screw-type terminals
type of electrical connection	
type of electrical connection	
type of electrical connection	screw-type terminals
type of electrical connection	screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
type of electrical connection	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
type of electrical connection	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
type of electrical connection	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²
type of electrical connection	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for auxiliary and control contacts with screw-type	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 7.5 5.3 lbf·in
type of electrical connection	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 7.5 5.3 lbf·in
type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 7.5 5.3 lbf·in

 for main contacts 	7 mm	
for auxiliary and control contacts	7 mm	
Safety related data		
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Ambient conditions		
installation altitude at height above sea level maximum	1 000 m	
ambient temperature		
during operation	-25 +60 °C	
 during storage 	-55 +80 °C	
Electromagnetic compatibility		
conducted interference		
 due to burst according to IEC 61000-4-4 	2 kV / 5 kHz behavior criterion 2	
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV behavior criterion 2	
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2	
 due to high-frequency radiation according to IEC 61000-4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1	
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2	
conducted HF interference emissions according to CISPR11	Class A for industrial environment	
field-bound HF interference emission according to CISPR11	Class A for industrial environment	
Short-circuit protection, design of the fuse link		
manufacturer's article number		
 of full range R fuse link for semiconductor protection at NH design usable 	<u>3NE1817-0</u>	
 of full range R fuse link for semiconductor protection at cylindrical design usable 	5SE1350; Maximum operating voltage 400 V!	
 of back-up R fuse link for semiconductor protection at NH design usable 	3NE8018-1	
 of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 	3NC1450	
 of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	3NC2280	
manufacturer's article number of the gG fuse at NH design usable		

Certificates/ approvals

• up to 460 V

General Product Approval

EMC

3NA3812; These fuses have a smaller rated current than the

Declaration of Conformity



Confirmation









Declaration of Conformity

Test Certificates

Marine / Shipping

other

semiconductor relays



Type Test Certificates/Test Report



Confirmation



Further informatior

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2450-1AC45


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2450-1AC45


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RF2450-1AC45

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RF2450-1AC45&lang=en

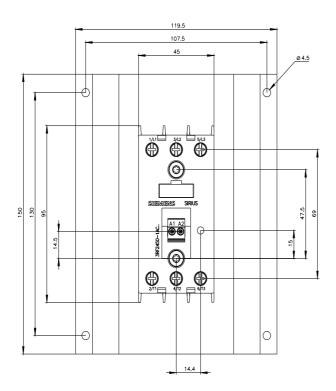

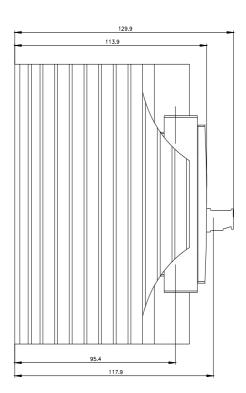

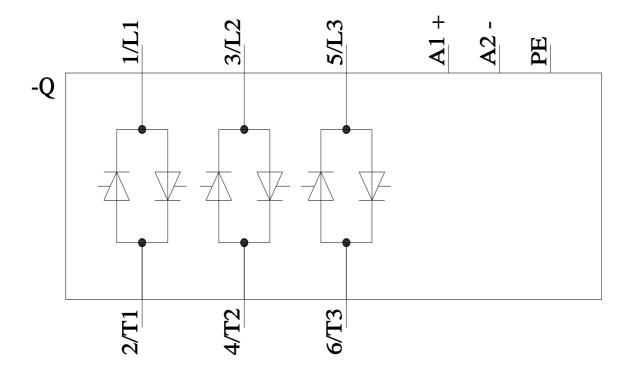

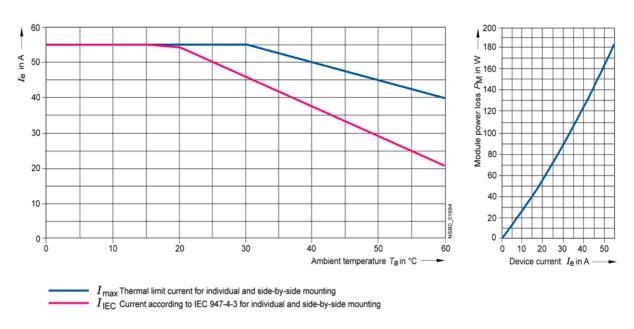

last modified: 6/3/2021 🖸