# 4


### Switching devices – Contactors and contactor assemblies – Special applications



	B
	Price groups
	PG 41A, 41B
4/2	Introduction
	Contactors for special applications
4/7	SIRIUS 3RT.4 contactors for low or non-inductive loads (AC-1), 3-pole up to 2 650 A
4/21	SIRIUS 3RT.3 contactors, 4-pole, up to 525 A
4/36	SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC
4/42	SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole
4/52	SIRIUS 3RT23 to 3RT26, 3RT14 contactors
4/54	Contactors for railway applications - SIRIUS 3RT contactors with extended operating range, 3-pole
4/63	- SIRIUS 3RH2 contactor relays with extended operating range
4/66	- 3TH4 contactor relays, 8-pole
4/68	- 3TC contactors for switching DC voltage, 2-pole
4/70	3TC contactors for switching DC voltage, 1- and 2-pole
3/138	3TG10 power relays/miniature contactors

#### Introduction

#### Overview

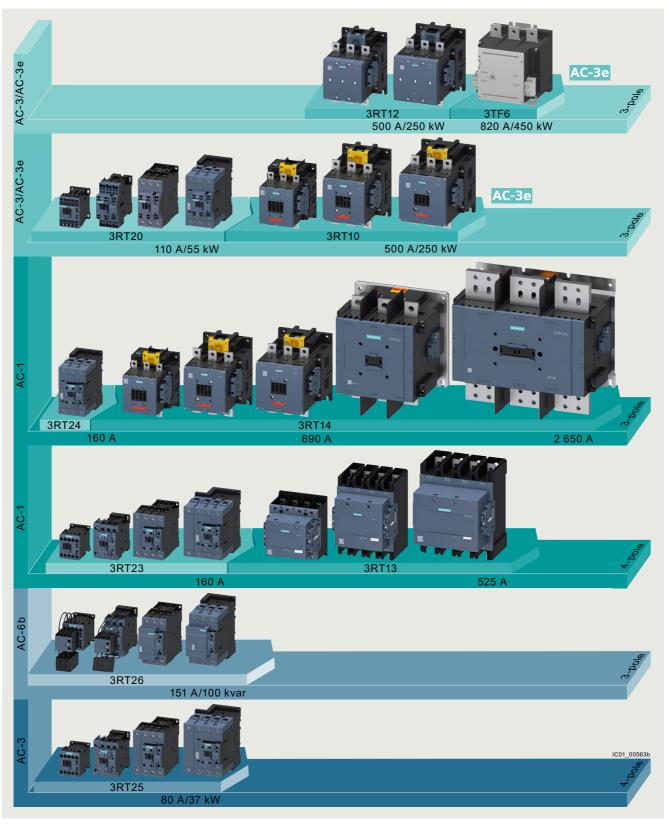

Overview of the 3RT and 3TF contactors

#### Introduction

#### More information

Box terminal blocks

Surge suppressors

Phase barriers

Withdrawable coils

Homepage, see www.siemens.com/sirius

Industry Mall, see www.siemens.com/product?3RT\_3TK\_3TC

Conversion tool, see www.siemens.com/conversion-tool

TIA Selection Tool Cloud (TST Cloud), see www.siemens.com/tstcloud/?node=Contactor









Size	S3		S6	S10	S12	
Туре	3RT244.		3RT1456	3RT146.	3RT1476	
3-pole 3RT244 and 3RT145 to 3	3RT147 contact	tors				
Type	3RT2446	3RT2448	3RT1456	3RT1466	3RT1467	3RT1476

Type		3012440	3H 12440	3H11430	3H11400 3H11407	3011470
Number of main cor	ntacts	3 NO		3 NO	3 NO	3 NO
AC, AC/DC operation	on	(p. 4/16)		(p. 4/17, 4/18)	(p. 4/17, 4/18)	(p. 4/17, 4/18)
AC-1						
<i>U</i> i	,	/ 1 000				
U <sub>e</sub>	,	/ 690				
<i>I</i> <sub>e</sub> up to 690 V	40 °C	A 140	160	275	400 500	690
	60 °C	A 130	140	250	380 450	Standard operating mechanism: 650, solid-state operating mechanism: 600
Accessories for	contactors					
Auxiliary switches		3RH29, 3RA28	(p. 3/87 3/95)	3RH19, 3RT1926		(p. 3/90, 3/92, 3/94, 3/96)
			(p. 3/100)			
Terminal covers		3RT2946-4EA4	(p. 3/112)	3RT1956-4EA.		(p. 3/112)

3RT1955/56-4G

3RT1956-1C (RC element)

(p. 4/20) 3RT1987-4AA1



3RT1983-4AA1

**3RT2936, 3RT2946** (p. 3/97, 3/98)







(p. 3/110)

(p. 3/98)

Туре	3RT1481, 3	BRT1482	3RT1483	3RT1485, 3RT	Γ1486	3RT1487	
3-pole 3RT148 contactors							
Туре	3RT1481	3RT1482	3RT1483	3RT1485	3RT1486	3RT1487	
Number of main contacts	3 NO						
AC/DC operation	(p. 4/19)						
AC-1							
<i>U</i> <sub>i</sub> ∨	1 000						
<i>U</i> <sub>e</sub> ∨	1 000						
<i>I</i> <sub>e</sub> 40 °C A	900	1 050	1 260	1 700	2 100	2 650	
Accessories for contactors							
Second auxiliary switch, lateral	3RH1981-1	JA11					(p. 4/19)
Spare parts for contactors							
First auxiliary switch, lateral	3RH1981-1	DA11				<u> </u>	(p. 4/20)

3RT1982-5A.31 (p. 4/20) 3RT1983-5AP31 (p. 4/20) 3RT1987-5AP31

(p. 4/20) (p. 4/20)

#### Introduction

Function modules (direct-on-line starting, star-delta (wye-delta) starting)

**Terminal covers** 

Surge suppressors



3RA281.

3RT2916







		-		24 M			10 M W		45 45		
Size		S00		S0			S2		S3		
Туре		3RT231		3RT232.			3RT233.		3RT234.		
4-pole 3RT23 cont	tactors										
Туре		3RT231	6 3RT2317	3RT2325	3RT2326	3RT2327	3RT2336	3RT2337	3RT2344	3RT2346	3RT2348
Number of main conta	acts	4 NO		4 NO			4 NO		4 NO		
AC, DC and AC/DC or	peration	(p. 4/29	, 4/31)	(p. 4/29.	4/31)		(p. 4/29	4/33)	(p. 4/29	4/33)	
AC-1											
<i>U</i> i	V	690									
U <sub>e</sub>	V	690									
<i>I</i> <sub>e</sub> up to 690 V	40 °C A	18	22	35	40	50	60	110	110	140	160
	60 °C A	16	20	30	35	42	55	95	100	130	140
AC-3											
$I_{\rm e}$ up to 400 V	Α	9	12	15.5	15.5	15.5					
P at 400 V	kW	4	5.5	7.5	7.5	7.5			-	-	-
Accessories for c	ontactors										
Auxiliary switches		3RH29,	3RA28							()	o. 3/87 3/95







**3RT2936-4EA4** (p. 3/112) **3RT2946-4EA4** 

(p. 3/97, 3/98) **3RT2936** (p. 3/97, 3/98)


(p. 3/100)

(p. 3/112)

**3RT2936, 3RT2946** (p. 3/97, 3/98)

Size		S6		S10		S12		
Туре		3RT1355		3RT136.		3RT137.		
4-pole 3RT13 contacto	ors							
Туре		3RT1355		3RT1363	3RT1364	3RT1373	3RT1374	3RT1375
Number of main contacts		4 NO		4 NO		4 NO		
AC/DC operation		(p. 4/34)		(p. 4/34)		(p. 4/34)		
AC-1								
<i>U</i> i	V	1 000						
U <sub>e</sub>	V	690		1 000				
$I_{e}$	40 °C A	200		275	350	400	500	525
Accessories for conta	ctors							
Second auxiliary switch,	lateral	3RH1951-1SA11						(p. 4/35)
Terminal covers		3RT1956-4EB10	(p. 4/35)	3RT1966-4EB10	(p. 4/35)	3RT1976-4EB10	0	(p. 4/35)
Mechanical interlocks		3RA1954-3A						(p. 4/35)
Bus connectors offset				3RT1966-4D	(p. 4/35)	3RT1976-4D		(p. 4/35)
Spare parts for contact	ctors							
First auxiliary switch, late	eral	3RH1951-1TA11						(p. 4/35)

#### Introduction

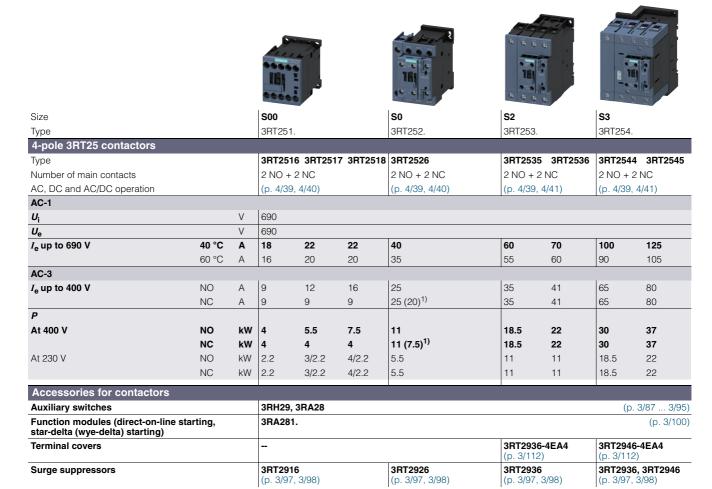

<sup>1)</sup> The value in brackets applies to the NC for DC operation.

#### Further contactors


- SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole, see page 4/42 onwards
- 3TC contactors for switching DC voltage, 1-pole and 2-pole, see page 4/70 onwards
- Contactors for railway applications
  - SIRIUS 3RT contactors with extended operating range, 3-pole, see page 4/54 onwards
  - SIRIUS 3RH2 contactor relays with extended operating range, see page 4/65
  - 3TH4 contactor relays, 8-pole, see page 4/66 onwards

#### Introduction

#### Connection methods

The following connection options are available for 3RT contactors depending on the size and version:


- 3RT2 contactors
  - Sizes S00 and S0: screw terminals or spring-loaded terminals both for the main as well as for the auxiliary and control circuits
  - Sizes S2 and S3: screw terminals (complete devices) or spring-loaded terminals (auxiliary circuit only)
- 3RT13 contactors, sizes S6 to S12: Busbar connections (partly with bus connectors offset), auxiliary and control circuits with screw terminals
- 3RT14 contactors: Busbar connections

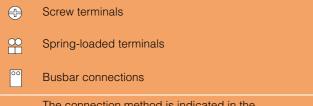

The connection method is indicated in the corresponding tables by the symbols shown on orange backgrounds.

#### Voltage data

The data for 3-phase power systems according to IEC 60947-4-1 are valid for the following forms of power supply:

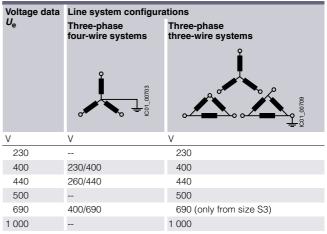

-- Not specified

SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### Overview



3-pole AC-1 contactors top row: 3RT148 contactors bottom row: 3RT244, 3RT145 to 3RT147 contactors

#### Standards

IEC 60947-1, IEC 60947-4-1, IEC 60947-5-1 (auxiliary switches)

#### Contactors with increased tamper protection

Increased tamper protection is ensured either by using our contactor versions with factory-installed, permanently mounted auxiliary switches which are protected against mechanical external actuation (e.g. 3RT14..-....3PA0 contactors), or by using the 3RT1926-4MA10 sealable cover as an accessory, (see page 3/112).

# Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

Short-circuit and overload protection of main connections

For information on the protection of a free-standing contactor, see the technical product data sheet.

For more information on complete units such as contactors with overload relays or contactors with motor starter protectors as the motor feeder, see Configuration Manual for load feeders.

Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet

Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

Short-circuit and overload protection of contactors with a digital input

A typical rated current of 20 mA applies to these inputs according to the PLC input types according to IEC 60947-4-1. The inputs can be protected accordingly.

- Contactors with PLC and F-PLC inputs:
- For 3RT14..-.S and 3RT14..-.N, marked with +/-
- Supply voltage connections A1 A2:
  - For 3RT14...-.N, protection based on the load characteristics must be employed.
     For information on power consumption, see the technical
  - product data sheet.
     For 3RT14..-.S, protection is already integrated.

#### Short-circuit and overload protection of other connections

The 3RT14..-.P contactor version with remaining lifetime indicator (RLT) also has additional connections H1 - H2 and R1 - R2.

If A1 - A2 is already protected, further protection of H1 - H2 is not required.

For protection specifications for protecting R1 - R2, see the technical product data sheet.

#### SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

Protection against overvoltage at the control supply voltage connection

3RT244 contactors supplied without a coil circuit can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of diode and Zener diode for short break times) for damping switching overvoltages in the coil and can be ordered separately as accessories, see page 3/97

3RT14 contactors are already equipped with coil damping (varistor).

#### Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information about influencing the time response using damping, see Equipment Manual.

#### Connection methods

#### Main circuit

- 3RT244 contactors:
  - Screw terminals with box terminal;
  - direct connection to the connecting bar possible with cable lugs when the box terminal is removed.
- 3RT145 to 3RT147 contactors:
  - Screw terminals with connecting bars that the cables can be connected to using either cable lugs or flexible or rigid busbars. Alternatively, box terminals are available as accessories.
- 3RT148 contactors: Screw terminals with connecting bars

#### Auxiliary and control circuits

- 3RT24, 3RT145 to 3RT147: Screw or spring-loaded terminals
- 3RT148: Screw terminals

#### Electromagnetic compatibility (EMC)

The contactors comply with the conditions for environment A according to IEC 60947-1.

#### Note:

When the contactors are used in an environment with frequency converters, the configuration notes must be observed, see Equipment Manual.

#### Contact reliability of the auxiliary contacts

If voltages  $\leq$  110 V and currents  $\leq$  100 mA are to be switched, the auxiliary contacts of the 3RT contactors or 3RH contactor relays should be used as they guarantee a high level of contact reliability.

These auxiliary contacts are particularly suitable for solid-state circuits with currents  $\geq$  1 mA at a voltage  $\geq$  17 V.

#### Operating mechanism types

#### 3RT244 contactors

The contactors are available as versions with conventional AC or DC operating mechanisms or as versions with a wide-range solid-state operating mechanism and a universal actuating voltage (AC or DC operation).

With an operating range from 0.8 to 1.1 x  $U_s$ , control takes place via the control supply voltage connection A1 - A2.

#### 3RT145 to 3RT147 contactors

The contactors are powered via a supply voltage with an operating range from 0.8 to 1.1 x  $U_{\rm S}$ , optionally also controlled depending on the chosen mode of operation. Alternatively, control is via the separate 24 V DC control signal input. Various rated voltage ranges for AC/DC control are available.

The following control and/or operating mechanism versions are available:

- 3RT14..-.A contactors:
  - Standard operating mechanism for AC and DC operation (power consumption reduced from closing to closed)
- Solid-state operating mechanisms:
  - Overvoltage damping of the operating mechanism coil is already integrated in the electronics for contactors with solid-state operating mechanisms.

The following versions are available:

- 3RT14..-.N contactors:
   With two operating modes: direct control or via PLC input (24 V DC)
- 3RT14..-.P contactors:
- Control via PLC input (24 V DC) only, but with additional remaining lifetime indicator (RLT)
- 3RT14..-S contactors: Control via fail-safe PLC input (24 V DC) only, for simplification of safety applications

#### 3RT148 contactors

The contactors are equipped with a solid-state operating mechanism for AC/DC control; coil damping is integrated. The operating range is 0.85 to 1.1 x  $U_{\rm s}$ .

# Replacing solenoid coils, operating mechanisms or spare contacts

#### 3RT244 contactors

Solenoid coil or spare contact replacement is possible.

#### 3RT145 to 3RT147 contactors

The operating mechanisms for 3RT14..-.A/-.N/-.P contactors are removable and can be replaced simply by unlocking and pulling them out. The spare contacts can also be replaced.

#### NOTICE

Removal or changing of the operating mechanism is not permitted for 3RT14..-. S contactors with fail-safe control.

#### 3RT148 contactors

The operating mechanisms are removable and can be replaced simply by unlocking and pulling them out.

# Fitting auxiliary contacts and mounting additional auxiliary switches

#### Features in delivery condition

- 3RT244 contactors:
- Two auxiliary contacts (1 NO + 1 NC) are integrated in the basic unit.
- 3RT14 contactors:
  - These contactors are supplied with two laterally mounted auxiliary switches with two contacts each (2 NO + 2 NC).

#### Expansion possibilities

All basic units can be expanded using auxiliary switches; the permissible configuration must be observed.

For detailed information about the fitting of auxiliary switches for 3RT244 contactors, see pages 3/81 to 3/86.

#### Accessories and spare parts

- 3RT244 and 3RT145 to 3RT147 contactors, see Basic units, page 3/69 onwards
- 3RT148 contactors, see page 4/19 onwards

SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### Connection of contactors to fail-safe control modules


While contactors with smaller power ratings can be connected directly to the outputs of fail-safe controllers, implementing safety-related applications with standard contactors with higher power is much more complicated and elaborate because of the necessary coupling links.

Due to their fail-safe control input, the special versions from size S6 to S12 (3RT14..-.S) provide a much simpler way of doing this.

More information, see

- Safety technology, page 11/1 onwards
- Guide of use for contactors in safety applications

Example for SIL 2 and SIL 3/PL e application – previously:

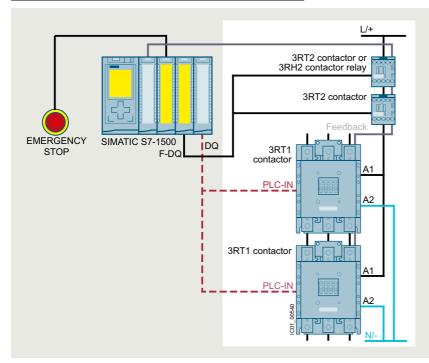


3RT1 contactor in size S6 with standard or solid-state operating mechanism with PLC-IN

- Safety-related tripping only possible via coupling links and F-DQ
- Standard operating mechanism: operational switching via coupling links and F-DQ
- Solid-state operating mechanism: operational switching with PLC-IN and DQ

Application with safety-related disconnection with standard contactors using the example of a 3RT145 contactor

#### Example for SIL 3/PL e (left-hand side) or SIL 2/PL c (right-hand side) application – new:

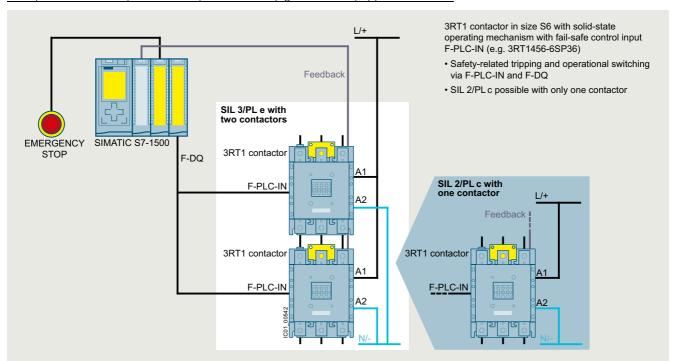

Application with safety-related disconnection with contactors with fail-safe control using the example of a 3RT145 contactor

Contactors for special applications

#### SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### Overview graphics with mountable accessories

- 3RT244 contactors, see page 3/11
- 3RT145 to 3RT147 contactors, see page 3/12 onwards
- 3RT148 contactors, see following graphic



1 3RT1481 to 3RT1487 contactors (3RT1487 contactor is shown)

Can be mounted onto side of contactor

2 3RH1981-1JA11 second auxiliary switch

3RT1481 to 3RT1487 contactors with mountable accessories

#### Application

The 3RT.4 contactors can be used for the following applications:

- For switching weak or non-inductive loads (AC-1)
- Disconnecting loads or power generation plants from the grid (e.g. wind turbines or photovoltaic systems)
- Disconnecting frequency converters from the grid

SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

### Technical specifications

More information	
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/24229/td For FAQs, see https://support.industry.siemens.com/cs/ww/en/ps/24229/faq	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/24229/man Guide of use for contactors in safety applications, see https://support.industry.siemens.com/cs/ww/en/view/109807687

Type Size		3RT2446, 3RT2448 S3	3RT1456 S6	3RT1466 S10	3RT1467	3RT1476 S12
General data						
Dimensions (W x H x D)						
Basic units     Screw/spring-loaded terminals     Design and the state of the	mm	70 x 140 x 152	120 x 172 x 170	145 x 210	x 202	160 x 214 x 225
Basic unit with mounted auxiliary switch     Screw terminals     Spring leaded terminals	mm	70 x 140 x 196	120 x 172 x 217	145 x 210	x 251	160 x 214 x 271
<ul> <li>Spring-loaded terminals</li> <li>Basic unit with mounted function module or solid-state time-delayed</li> </ul>	mm	70 x 140 x 200				
auxiliary switch - Screw/spring-loaded terminals	mm	70 x 140 x 226				
Permissible mounting position		360° 22,5° 22,5° ₿	22.	5° 22 5°   ¤		
The contactors are designed for operation on a vertical mounting surface.		360 22,5 22,5 s.pho ages	90° ++++	NSB0_00649		
Upright mounting position		NSB0_00477a Special version required				
Mechanical endurance		opoolal volololi roquilou				
Basic units and basic units with mounted auxiliary switch	Operating cycles	10 million				
Basic units with solid-state compatible auxiliary switch		5 million				
Electrical endurance for utilization category AC-1, at $U_{\rm e}$ = 400 V	Oper- ating cycles	0.5 million			0.35 million	0.5 million
Rated insulation voltage <i>U</i> <sub>i</sub> (pollution degree 3)	V	1 000				
Rated impulse withstand voltage $U_{\rm imp}$	kV	6	8			
<b>Protective separation</b> between the coil and the main contacts according to IEC 60947-1, Annex N	V	690				
Mirror contacts according to IEC 60947-4-1, Annex F						
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.						
<ul><li>Integrated auxiliary switches</li><li>Removable auxiliary switches</li></ul>		Yes 	 Yes			
Permissible ambient temperature						
During operation	°C	-25 +60				
During storage     Short-circuit protection	°C	-55 +80				
Main circuit     Version of the fuse link required for short-circuit protection of the main circuit						
- For type of coordination 1		gG: 250 A (690 V, 100 kA)	gG: 355 A (690 V, 100 kA)	gG: 500 A (690 V, 100		gG: 800 A (690 V, 50 kA)
- For type of coordination 2		gG: 250 A (690 V, 100 kA)	gG: 350 A (690 V, 100 kA)	gG: 500 A (690 V, 100	ŕ	gG: 710 A (690 V, 100 kA)
Auxiliary circuit						
Version of the fuse link required for short-circuit protection of the auxiliary switch	Α	Fuse gG: 10				
Version of the miniature circuit breaker required for short-circuit protection of the auxiliary switch	Α	On request				
Short-circuit protection for contactors with overload relays		See Configuration Manual for lo	oad feeders			
Short-circuit protection for fuseless load feeders		See • 3RA2 load feeders, page 8/5 • Configuration Manual for load	onwards			

Туре			3RT2446, A	3RT2448 N	3RT1456 A	N/P/S	3RT1466 A	6, 3RT146 N/P/-		76 N/P/S
Size			S3		S6	,,	S10		S12	,,
Control										
Solenoid coil operating range (AC/D	C)		0.8 1.1 x <i>U</i> <sub>s</sub>	0.8 x <i>U</i> <sub>s m</sub>	<sub>iin</sub> 1.1 x <i>l</i>	U <sub>s max</sub>				
Power consumption of the solenoid (for cold coil and $1.0 \times U_{\rm e}$ )	coils									
AC operation, 50 Hz,	Closing	VA	296							
standard version	P.f. $\varphi$ Closed	VA	0.61 19							
	P.f. φ	*/ (	0.38							
<ul> <li>AC operation, 50/60 Hz, standard version</li> </ul>	Closing	VA	348/296 0.62/0.55							
Staridard Version	P.f. $\varphi$ Closed	VA	25/18							
• AC operation FO/60 Hz	P.f. $\varphi$	VA	0.35/0.41 326/326							
<ul> <li>AC operation, 50/60 Hz, for USA/Canada</li> </ul>	Closing P.f. $\varphi$	VA	0.62/0.55							
	Closed P.f. φ	VA	22/22 0.38/0.4							
AC/DC operation	Closing for	VA		163	300	280	590	530	830	750
	AC operation P.f. $\varphi$				0.9	0.8	0.9	0.8	0.9	0.8
	Closed for	VA		3.1	5.8	4.8	6.7	8.5	9.2	9
	AC operation P.f. $\varphi$				0.8	0.6	0.9	0.4	0.9	0.4
	Closing for	W		76	360	320	650	580	920	800
	DC operation Closed for	W		1.8	5.2	2.8	7.4	3.4	10	3.6
	DC operation	••			J			J	.0	0.0
Type of PLC control input according										
Solid-state operating mechanism	3RT14N/P 3RT14S				Type 2 Type 1					
Rated voltage		V DC			24					
Operating range		V DC			17 30					
Power consumption	-:1	mA -			≤ 30					
<ul> <li>Recovery time after mains failure, typ (applicable only for fail-safe version)</li> </ul>		S			2					
Type Size			3RT2446 S3	3RT2448	3RT1456 S6	3RT146	3RT1		RT1476	
						0.10			/1 <b>_</b>	
Rated data of the main contacts	\$									
Rated data of the main contacts  Load rating with AC	5		_							
	3									
Load rating with AC	At 40 °C up to 690 V		140	160	275	400	500		90	
Load rating with AC Utilization category AC-1			140 130	160 140	275 250	400 380	500 450	S	Standard op	
Load rating with AC Utilization category AC-1	At 40 °C up to 690 V							S n s	Standard op- nechanism: olid-state op-	650, perating
Load rating with AC Utilization category AC-1	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V	A A		140				S n s	Standard op nechanism:	650, perating
Load rating with AC Utilization category AC-1 • Rated operational currents $I_e$	At 40 °C up to 690 V At 60 °C up to 690 V	A A A	130 60 60	140 80 80	250  	380	450	S n s n	standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V	A A	130	140	250			S n s n	Standard op- nechanism: olid-state op-	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents I <sub>e</sub> Minimum cross-section in the main	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V	A A A mm <sup>2</sup>	130 60 60	140 80 80	250  	380	450	S n s n	standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents I <sub>e</sub> Minimum cross-section in the main circuit at maximum AC-1 rated value  Power loss per main conducting path	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V	A A A mm <sup>2</sup>	60 60 50 9.8	80 80 70	250   140	240	450 300	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents I <sub>e</sub> Minimum cross-section in the main circuit at maximum AC-1 rated value	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V	A A A mm <sup>2</sup>	60 60 50	80 80 70	250   140	240	450 300	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V	A A A mm <sup>2</sup>	60 60 50 9.8 <b>3RT2446</b> ,	80 80 70	250   140	240	450 300	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type Size	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V At $I_e/AC-1/40$ °C	A A A mm <sup>2</sup>	130 60 60 50 9.8 <b>3RT2446</b> ,	80 80 70	250   140	240	450 300	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type Size Conductor cross-sections	At 40 °C up to 690 V At 60 °C up to 690 V At 40 °C up to 1 000 V At 60 °C up to 1 000 V At $I_e/AC-1/40$ °C	A A A mm² W	60 60 50 9.8 3RT2446, S3	140 80 80 70 12.8 <b>3RT2448</b>	250   140 28.8	380 240 35.2	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type Size Conductor cross-sections Main conductors (1 or 2 conductors of Solid  Stranded	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V At 60 °C up to 1 000 V  At $I_e/AC$ -1/40 °C	A A A mm² W  mm² mm²	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1	140 80 80 70 12.8 <b>3RT2448</b> 16) <sup>1)</sup> 6) <sup>1)</sup> ; 2 × (10	250   140 28.8	240	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC     Utilization category AC-1     Rated operational currents Ie     Minimum cross-section in the main circuit at maximum AC-1 rated value     Power loss per main conducting path  Type Size     Conductor cross-sections     Main conductors (1 or 2 conductors of Solid     Stranded     Finely stranded with end sleeve (DIN)	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V At 60 °C up to 1 000 V  At $I_e/AC$ -1/40 °C	A A A mm² W  mm² mm² mm² mm²	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1 2 x (2.5 2 x (2.5	80 80 70 12.8 <b>3RT2448</b> 16) <sup>1)</sup> ; 2 × (10 35) <sup>1)</sup> ; 1 × (2	250  140 28.8 0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup>	380 240 35.2 x (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type Size Conductor cross-sections Main conductors (1 or 2 conductors of Solid  Stranded	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V At 60 °C up to 1 000 V  At $I_e/AC$ -1/40 °C	A A A mm² W  mm² mm² mm² mm²	60 60 50 9.8 3RT2446, S3 2 × (2.5 2 × (6 1 2 × (2.5 2 × (10 Hexagon :	80 80 70 12.8 <b>3RT2448</b> 16) <sup>1)</sup> ; 2 x (10 35) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 socket, size	250  140 28.8 0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup>	380 240 35.2 x (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC     Utilization category AC-1     Rated operational currents Ie     Minimum cross-section in the main circuit at maximum AC-1 rated value     Power loss per main conducting path  Type     Size     Conductor cross-sections     Main conductors (1 or 2 conductors of Solid     Stranded     Finely stranded with end sleeve (DIN AWG cables, solid or stranded     Terminal screws     Tightening torque	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V  At 60 °C up to 1 000 V  At $I_e/AC-1/40$ °C  can be connected)	A A A mm² W  mm² mm² mm² mm²	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1 2 x (2.5 2 x (10 Hexagon :	80 80 70 12.8 <b>3RT2448</b> 16) <sup>1)</sup> ; 2 × (10 335) <sup>1)</sup> ; 1 × (2 1/0) <sup>1)</sup> ; 1 × (2	250  140 28.8 0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup>	380 240 35.2 x (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type Size Conductor cross-sections Main conductors (1 or 2 conductors of Solid  Stranded Finely stranded with end sleeve (DIN AWG cables, solid or stranded Terminal screws Tightening torque Auxiliary conductors and control co	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V  At 60 °C up to 1 000 V  At $I_e/AC-1/40$ °C  can be connected)	A A A Mmm² W  mm² mm² mm² AWG	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1 2 x (2.5 2 x (10 Hexagon :	80 80 70 12.8 <b>3RT2448</b> 16) <sup>1)</sup> ; 2 x (10 35) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 socket, size	250  140 28.8 0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup>	380 240 35.2 x (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Load rating with AC Utilization category AC-1  Rated operational currents Ie  Minimum cross-section in the main circuit at maximum AC-1 rated value Power loss per main conducting path  Type Size Conductor cross-sections Main conductors (1 or 2 conductors of Solid  Stranded Finely stranded with end sleeve (DIN AWG cables, solid or stranded Terminal screws Tightening torque Auxiliary conductors and control co	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V  At 60 °C up to 1 000 V  At $I_e/AC-1/40$ °C  can be connected)	A A A Mmm² W  mm² mm² mm² AWG	9.8  3RT2446, S3  2 x (2.5 2 x (6 1 2 x (2.5 2 x (10 Hexagon : 4.5 6 (4) 2 x (0.5	140 80 80 70 12.8 3RT2448 3RT2448 3RT2448 16) <sup>1)</sup> ; 2 x (10 35) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 2 x (10 35) <sup>1)</sup> ; 2 x (10 36) <sup>1)</sup> ; 2 x (10 37) <sup>1</sup> ; 1 x (2 38) <sup>1</sup> ; 1 x (2	250  140 28.8 0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup> 14 4 1)	380 240 35.2 × (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Conductor cross-sections  Main conductors (1 or 2 conductors of Einely stranded or Tightening torque  Auxiliary conductors and control co (1 or 2 conductors)  Auxiliary conductors can be connected)  Solid or stranded  Finely stranded with end sleeve (DIN Auxiliary conductors and control co (1 or 2 conductors)  Lightening torque  Auxiliary conductors can be connected)  Solid or stranded  Finely stranded with end sleeve (DIN Auxiliary conductors can be connected)	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V  At 60 °C up to 1 000 V  At $I_e/AC-1/40$ °C  can be connected)	A A A A Mmm² W  Mm² Mm² AWG Nm  Mm² Mm²	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1 2 x (2.5 2 x (10 Hexagon: 4.5 6 (4	80 80 70 12.8 3RT2448 3RT2448 16) <sup>1)</sup> ; 2 x (10 35) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 1.5) <sup>1)</sup> ; 2 x (1.5) <sup>1</sup> ; 2	250   140 28.8 28.8 2.5 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup> 14 (0.75 2.5	380 240 35.2 × (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Conductor cross-sections  Main conductors (1 or 2 conductors of Finely stranded or stranded  Tight and sold or stranded  Edition of the Main conductors of the Main conductors (1 or 2 conductors of Solid)  Stranded  Tight and conductors (1 or 2 conductors of Solid)  Stranded  Tight and conductors (1 or 2 conductors of Solid)  AWG cables, solid or stranded  Terminal screws  Tightening torque  Auxiliary conductors and control co (1 or 2 conductors can be connected)  Solid or stranded  Finely stranded with end sleeve (DIN)  AWG cables, solid or stranded	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V  At 60 °C up to 1 000 V  At $I_e/AC-1/40$ °C  can be connected)	A A A A Mmm² W  Mm² Mm² AWG Nm  Mm² Mm²	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1 2 x (2.5 2 x (10 Hexagon : 4.5 6 (4 2 x (0.5 2 x (0.5 2 x (20 2 x (20	80 80 70 12.8 <b>3RT2448</b> <b>3RT2448</b> 3RT2448 (16) <sup>1)</sup> ; 2 x (10) <sup>1)</sup> ; 1 x (200cket, size 0 53 lb.ir (1.5) <sup>1)</sup> ; 2 x (10) <sup>1</sup> ; 2 x (	250  140  28.8  0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup> 4 n)  (0.75 2.5 8 14) <sup>1)</sup>	380 240 35.2 × (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating
Conductor cross-sections  Main conductors (1 or 2 conductors of Einely stranded or Tightening torque  Auxiliary conductors and control co (1 or 2 conductors)  Auxiliary conductors can be connected)  Solid or stranded  Finely stranded with end sleeve (DIN Auxiliary conductors and control co (1 or 2 conductors)  Lightening torque  Auxiliary conductors can be connected)  Solid or stranded  Finely stranded with end sleeve (DIN Auxiliary conductors can be connected)	At 40 °C up to 690 V At 60 °C up to 690 V  At 40 °C up to 1 000 V  At 60 °C up to 1 000 V  At $I_e/AC-1/40$ °C  can be connected)	A A A A Mmm² W  Mm² Mm² AWG Nm  Mm² Mm²	60 60 50 9.8 3RT2446, S3 2 x (2.5 2 x (6 1 2 x (2.5 2 x (10 Hexagon : 4.5 6 (4 2 x (0.5 2 x (20 M3 (for Pc	80 80 70 12.8 3RT2448 3RT2448 16) <sup>1)</sup> ; 2 x (10 35) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 1/0) <sup>1)</sup> ; 1 x (2 1.5) <sup>1)</sup> ; 2 x (1.5) <sup>1</sup> ; 2	250  140  28.8  0 50) <sup>1)</sup> ; 1 2.5 50) <sup>1)</sup> 10 2/0) <sup>1)</sup> 10 2/0) <sup>1)</sup> 2; 4 1)  (0.75 2.5 8 14) <sup>1)</sup> 2; Ø 5 6	380 240 35.2 × (10 70)	300 35.2 Screw te	S n s n	Standard op- nechanism: olid-state op- nechanism:	650, perating

<sup>1)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

						<b></b>
Туре			3RT1456		3RT1466, 3RT1467	3RT1476
Size			S6		S10	S12
	or cross-sections					
Main cond (1 or 2 con	ductors ductors can be connected)		Screw terminals			
With moun	ted box terminals	Туре	3RT1955-4G	3RT1956-4G	3RT1966-4G	
	Terminal screws		M10 (hexagon socket, A/F 4)	M10 (hexagon socket, A/F 4)	M12 (hexago	n socket, A/F 5)
	Tightening torque	Nm lb.in	10 12 90 110	10 12 90 110	20 22 180 195	
Front clam	ping point connected	10.111	110	00 110	100 100	
届。	• Finely stranded with end sleeve (DIN 46228)	$mm_2^2$	16 70	16 120	70 240	
00478	<ul><li>Finely stranded without end sleeve</li><li>Stranded</li></ul>	mm <sup>2</sup> mm <sup>2</sup>	16 70 16 70	16 120 16 120	70 240 95 300	
O S S S S S S S S S S S S S S S S S S S	AWG cables, solid or stranded	AWG	6 2/0	6 250 kcmil	3/0 600 kc	:mil
	Ribbon cable conductors	mm	Min. 3 x 9 x 0.8,	Min. 3 x 9 x 0.8,	Min. 6 x 9 x 0	
Rear olom	(Number x Width x Thickness)  ping point connected		max. 6 x 15.5 x 0.8	max. 10 x 15.5 x 0.8	max. 20 x 24	X U.5
Tical Cialli	Finely stranded with end sleeve (DIN 46228)	mm <sup>2</sup>	16 70	16 120	120 185	
08480	<ul> <li>Finely stranded without end sleeve</li> </ul>	mm <sup>2</sup>	16 70	16 120	120 185	
	<ul><li>Stranded</li><li>AWG cables, solid or stranded</li></ul>	mm <sup>2</sup> AWG	16 70 6 2/0	16 120 6 250 kcmil	120 240 250 500 kg	amil
<b>♥</b> z	Ribbon cable conductors	mm	Min. 3 x 9 x 0.8,	Min. 3 x 9 x 0.8,	Min. 6 x 9 x 0	
	(Number x Width x Thickness)		max. 6 x 15.5 x 0.8	max. 10 x 15.5 x 0.8	max. 20 x 24	
	oing points connected cross-section 16 mm²)					
	<ul><li>Finely stranded with end sleeve (DIN 46228)</li><li>Finely stranded without end sleeve</li></ul>	mm <sup>2</sup> mm <sup>2</sup>	Max. 1 x 50, 1 x 70 Max. 1 x 50, 1 x 70	Max. 1 x 95, 1 x 120 Max. 1 x 95, 1 x 120	Min. 2 x 50, r	
<b>8</b> 8	Stranded     William end sleeve	mm <sup>2</sup>	Max. 1 x 50, 1 x 70	Max. 1 x 95, 1 x 120	Min. 2 x 50, max. 2 x 185 Min. 2 x 70, max. 2 x 240	
	AWG cables, solid or stranded	AWG	Max. 2 x 1/0	Max. 2 x 3/0	Min. 2 x 2/0, max. 2 x 500 kcmil	
	<ul> <li>Ribbon cable conductors (Number x Width x Thickness)</li> </ul>	mm	Max. 2 x (6 x 15.5 x 0.8)	Max. 2 x (10 x 15.5 x 0.8)	Max. 2 x (20 x 24 x 0.5)	
Busbar co	nnections					
	<ul> <li>Connecting bar (max. width)</li> <li>Bore diameter</li> </ul>	mm mm	17 9		25 11	
Cable lug	connection	111111	1)		2)	
	Finely stranded with cable lug	mm <sup>2</sup>	16 95		50 240	
	<ul> <li>Stranded with cable lug</li> </ul>	mm <sup>2</sup>	25 120		70 240	
	<ul> <li>AWG cables, solid or stranded</li> </ul>	AWG	4 250 kcmil		2/0 500 kc	mil
	<ul><li>Terminal screws</li><li>Tightening torque</li></ul>	Nm	M8 x 25 (A/F 13) 10 14		M10 x 30 (A/	F 17)
	righterning torque	lb.in	90 124		124 210	
	conductors ductors can be connected)					
(1012001	Solid	$\text{mm}^2$	2 x (0.5 1.5) <sup>3)</sup> , 2 x <sub>3</sub> (0.75	2.5)3) according to IEC 6094	<b>1</b> 7;	
		•	max. 2 x (0.75 4) <sup>3)</sup>		·	
	• Finely stranded with end sleeve (DIN 46228)	mm <sup>2</sup>	2 x (0.5 1.5) <sup>3)</sup> ; 2 x (0.75	. 2.5) <sup>3)</sup>		
	AWG cables, solid or stranded     Terminal parawa	AWG	2 x (18 14)			
	<ul><li>Terminal screws</li><li>Tightening torque</li></ul>	Nm lb.in	M3 (Pozidriv size 2) 0.8 1.2 7 10.3			
	conductors <sup>4)</sup> iductors can be connected)		Spring-loaded termina	als		
(1012001	Operating devices		3.0 x 0.5; 3.5 x 0.5			
	Solid	mm <sup>2</sup>	2 x (0.25 2.5)			
	<ul> <li>Finely stranded with end sleeve (DIN 46228)</li> </ul>	mm <sup>2</sup>	2 x (0.25 1.5)			
	<ul><li>Finely stranded without end sleeve</li><li>AWG cables, solid or stranded</li></ul>	mm <sup>2</sup> AWG	2 x (0.25 2.5) 2 x (24 14)			

<sup>&</sup>lt;sup>1)</sup> 3RT1456: When connecting cable lugs according to DIN 46235, use the 3RT1956-4EA1 terminal cover for conductor cross-sections from 95 mm<sup>2</sup> to maintain the phase clearance, see page 3/112.

<sup>2) 3</sup>RT1466, 3RT1467 and 3RT1476: When connecting cable lugs according to DIN 46234 for conductor cross-sections larger than 240 mm² and according to DIN 46235 for conductor cross-sections larger than 185 mm², the 3RT1966-4EA1 terminal cover is required to maintain the phase clearance, see page 3/112.

<sup>3)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

<sup>4)</sup> Max. external diameter of the conductor insulation: 3.6 mm. On spring-loaded terminals with conductor cross-sections ≤ 1 mm<sup>2</sup> an insulation stop is recommended, see page 3/115.

Туре		3RT1481-	3RT1482-	3RT1483-	3RT1485-	3RT1486-	3RT1487-
		6A.36	6A.36	6AP36	6AP36	6AP36	6AP36
General data							
Dimensions							
Width     Height     Depth	mm mm mm	285 352 250			431 403 246		
Mounting position		For vertical mounting surface can be rotated $\pm 30^{\circ}$ , for vertical mounting surface can be tilted $\pm 30^{\circ}$ forward or backward					
Installation altitude at height above sea level, maximum	m	2 000					
Insulation voltage at pollution degree 3							
<ul><li> Of the main circuit</li><li> Of the auxiliary circuit</li></ul>	V	1 000 600					
Impulse withstand voltage							
<ul><li> Of the main circuit</li><li> Of the auxiliary circuit</li></ul>	kV kV	8					
Product function, mirror contact according to IEC 60947-4-1		Yes					
Ambient temperature							
<ul><li>During operation</li><li>During storage</li></ul>	°C	-25 +55 -40 +80					
Short-circuit protection							
Version of the fuse link required							
<ul> <li>For short-circuit protection of the main circuit for type of coordination 2</li> </ul>		aR: 1 000 A (1 000 V, 30 kA)	aR: 1 100 A (1 000 V, 42 kA)	aR: 1 400 A (1 000 V, 42 kA)	aR: 2 200 A (1 000 V, 42 kA)	aR: 2 500 A (1 000 V, 42 kA)	aR: 2 800 A (1 000 V, 50 kA)
For short-circuit protection of the auxiliary switch		gG: 16 A (600	0 V, 1 kA)				

Contactors for special applications

Туре		3RT1481- 6AF36	6AP36	3RT1482- 6AF36	6AP36	3RT1483- 6AP36	3RT1485- 6AP36	3RT1486- 6AP36	3RT1487- 6AP36
Control circuit/control									
Operating range factor of the control supply voltage, rated value of the solenoid coil									
<ul><li>At AC at 50 Hz</li><li>At AC at 60 Hz</li><li>At DC</li></ul>		0.85 1.1 0.85 1.1 0.85 1.1	1						
Solenoid coil closing power for DC	W	1 400	2 000	1 400	2 000	2 700	2 800		
Closing apparent power of the solenoid coil for AC									
<ul><li>At 50 Hz</li><li>At 60 Hz</li></ul>	VA VA	1 000 1 000				1 700 1 700	1 800 1 800		
Solenoid coil closed for DC	W	6	7	6	7	8	11		
Closed apparent power of the solenoid coil for AC	VV	U	1	U	1	O	11		
At 50 Hz     At 60 Hz	VA VA	18 18	23 23	18 18	23 23	20 20	33 33		
Main circuit									
Operational current at AC-1									
• Up to 690 V									
- At an ambient temperature of 40 °C - At an ambient temperature of 55 °C	A A	900 900		1 050 1 050		1 260 1 260	1 700 1 700	2 100 2 100	2 650 2 650
• Up to 1000 V									
- At an ambient temperature of 40 °C	Α	900		1 050		1 260	1 700	2 100	2 650
- At an ambient temperature of 55 °C	Α	900		1 050		1 260	1 700	2 100	2 650
Type of electrical connection for the main circuit	0	Busbar co	nnections						
Minimum cross-section in the main circuit for max. AC-1 rated value	mm <sup>2</sup>	600		800		1 000	1 500	2 000	3 000
Туре		3RT1481- 3RT1482-		3RT1483-	6AP36	3RT1485- 3RT1486-		3RT1487-	6AP36
Conductor cross-sections									
Control circuit/control		_							
Type of connectable conductor cross-sections for auxiliary contacts									
• Solid		2x (1 2.	5 mm <sup>2</sup> )						
Solid or stranded		2x (1 2.	5 mm <sup>2</sup> )						
Finely stranded with end sleeve		2x (1 2.	5 mm <sup>2</sup> )						
Main circuit									
Width of connecting bar	mm	40		50		103			
Thickness of connecting bar	mm	10		13		10		20	
Diameter of hole	mm	17		13		15		13	

Contactors for special applications

SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### Selection and ordering data

#### Size S3: AC operation or AC/DC operation

- Coil circuits (varistors, diodes, etc.) retrofittable
  Auxiliary switches can be retrofitted
- Main and control conductors: Screw terminals



3RT244.-1...0

Size	Rated day AC-1, t <sub>u</sub> 40 °C		Auxiliary co	ontacts		Rated con	trol supply voltage $U_{\rm s}$	Screw terminals	<del>1</del>	PU (UNIT, SET, M)	PS*	PG
	Operation	onal	Ident. No.	Versi	on	50 Hz AC	50 Hz AC or DC					
	current in up to	e		\lambda	<del>}</del>			Article No.	Price per PU			
	690 V	690 V		•	•							
	Α	Α		NO	NC	V	V					
For	or screw fixing and		snap-on mo	ountin	g on 1	ГН 35-15 ar	nd TH 75-15 DIN rail	s				
	operatio		•									
S3	<b>140</b> 130		11	1	1	24		3RT2446-1AB00		1	1 unit	41B
						110		3RT2446-1AF00		1	1 unit	41B
						230		3RT2446-1AP00		1	1 unit	41B
	160	140	11	1	1	24		3RT2448-1AB00		1	1 unit	41B
						110		3RT2448-1AF00		1	1 unit	41B
						230		3RT2448-1AP00		1	1 unit	41B
AC/	DC opera	ation										
With	integrate	d coil circu	it (varistor ir	ntegrat	ed in e	lectronics at	the factory)					
S3	140	130	11	1	1		20 33	3RT2446-1NB30		1	1 unit	41B
							83 155	3RT2446-1NF30		1	1 unit	41B
							175 280	3RT2446-1NP30		1	1 unit	41B
	160	140	11	1	1		20 33	3RT2448-1NB30		1	1 unit	41B
							83 155	3RT2448-1NF30		1	1 unit	41B
							175 280	3RT2448-1NP30		1	1 unit	41B

Other voltages according to page 4/52 on request.

Contactors for special applications

#### SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### Sizes S6 to S12: AC/DC operation

- 3RT14..-. A standard operating mechanism
- Solid-state operating mechanism
   3RT14..-.N with 24 V DC control signal input
  - 3RT14..-.P with 24 V DC control signal input and remaining lifetime indicator (RLT)
- · For screw fixing

- Auxiliary and control conductors: Screw terminals
- Main conductors: Busbar connections; a connection kit with screws, spring washers and nuts is enclosed.











AND AND A	
3RT1456-6A.36	

3RT1466-6A.36

3RT1476-6A.36

3RT1476-6N.36

3RT1476-6P.35

Size	Rated data  AC-1, t <sub>u</sub> :		Auxiliary contacts, lateral	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b></b>	PU (UNIT, SET, M)	PS*	PG
	40 °C 60 °C								
	Operational current I <sub>e</sub>		Version	50/60 Hz AC or DC					
	up to	up to			Article No.	Price per PU			
	<b>A</b> A		NO NC	V					
Standa	ard operating i	mechanism for	AC and DC or	peration					

otanuaru operating	incentaniani for Ac and Bo operation
(nower concumption	on reduced from closing to closed)
(power consumptic	in reduced from closing to closed)

**									
With i	ntegrated co	oil circuit (varisto	r integrated	at the fa	actory)				
S6	275	250	2	2	110 127 220 240	3RT1456-6AF36 3RT1456-6AP36	1 1	1 unit 1 unit	41B 41B
S10	400	380	2	2	110 127 220 240	3RT1466-6AF36 3RT1466-6AP36	1 1	1 unit 1 unit	41B 41B
	500	450	2	2	110 127 220 240	3RT1467-6AF36 3RT1467-6AP36	1 1	1 unit 1 unit	41B 41B
S12	690	650	2	2	110 127 220 240	3RT1476-6AF36 3RT1476-6AP36	1 1	1 unit 1 unit	41B 41B

#### Solid-state operating mechanism

With 24 V DC control signal input e.g. for control by PLC

With i	ntegrated co	oil circuit (varisto	r integrated	d in elect	ronics at the factory)				
S6	275	250	2	2	96 127 200 277	3RT1456-6NF36 3RT1456-6NP36	1 1	1 unit 1 unit	41B 41B
S10	400	380	2	2	96 127 200 277	3RT1466-6NF36 3RT1466-6NP36	1 1	1 unit 1 unit	41B 41B
	500	450	2	2	96 127 200 277	3RT1467-6NF36 3RT1467-6NP36	1 1	1 unit 1 unit	41B 41B
S12	690	650	2	2	96 127 200 277	3RT1476-6NF36 3RT1476-6NP36	1 1	1 unit 1 unit	41B 41B

#### With 24 V DC control signal input · with remaining lifetime indicator (RLT) e.g. for control by PLC

With i	integrated co	oil circuit (varisto	r integrated	l in elect	ronics at the factory)				
S6	275	250	1	1	96 127 200 277	3RT1456-6PF35 3RT1456-6PP35	1 1	1 unit 1 unit	41B 41B
S10	400	380	1	1	96 127 200 277	3RT1466-6PF35 3RT1466-6PP35	1 1	1 unit 1 unit	41B 41B
	500	450	1	1	96 127 200 277	3RT1467-6PF35 3RT1467-6PP35	1 1	1 unit 1 unit	41B 41B
S12	690	650	1	1	96 127 200 277	3RT1476-6PF35 3RT1476-6PP35	1 1	1 unit 1 unit	41B 41B

Other voltages according to page 4/53 on request.

Contactors for special applications

#### SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### Sizes S6 to S12: AC/DC operation

- Certified and fail-safe 24 V DC control input with max. 20 mA, e.g. for control via the fail-safe output module of a controller (F-PLC) or safety relay
- Achievable Safety Integrity Level (SIL) according to IEC 62061 and Performance Level (PL) according to ISO 13849-1 with corresponding fault diagnostics:
  - With one contactor: SIL 2/PL c
  - With two contactors in series: SIL 3/PL e
  - Fail-safe applications can be implemented using this contactor.
- Version with removable lateral auxiliary switches or permanently mounted auxiliary switches
- For screw fixing
- Auxiliary and control conductors: Screw terminals
- Main conductors: Busbar connections; a connection kit with screws, spring washers and nuts is enclosed.

#### More information, see

- Safety technology, page 11/1 onwards
- Guide of use for contactors in safety applications











3RT1456-6S.36

3RT1466-6S.36

3RT1476-6S.36

3RT1456-6S.36-3PA0

3RT1476-6S.36-3PA0

Size	Rated data according to IEC 60947-4-1 AC-1, t <sub>u</sub> : 40 °C 60 °C		Auxiliar	y s, lateral	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
	Operational	current I <sub>e</sub>	Version		50/60 Hz AC or DC					
	up to		1	<del>}</del>		Article No.	Price per PU			
	690 V	690 V	1							
	Α	A	NO	NC	V					

#### Solid-state operating mechanism

#### With two removable laterally mounted auxiliary switches

With i	ntegrated o	oil circuit (va	ristor inte	grated in	electronics at the factory)				
S6	275	250	2	2	96 127 200 277	3RT1456-6SF36 3RT1456-6SP36	1	1 unit 1 unit	41B 41B
S10	400	380	2	2	96 127 200 277	3RT1466-6SF36 3RT1466-6SP36	1 1	1 unit 1 unit	41B 41B
	500	450	2	2	96 127 200 277	3RT1467-6SF36 3RT1467-6SP36	1	1 unit 1 unit	41B 41B
S12	690	650	2	2	96 127 200 277	3RT1476-6SF36 3RT1476-6SP36	1 1	1 unit 1 unit	41B 41B

vvitn	two perm	anentiy iate	rany mod	untea al	uxiliary switches				
With i	ntegrated o	oil circuit (va	ristor inte	grated in	electronics at the factory)				
S6	275	250	2	2	96 127 200 277	3RT1456-6SF36-3PA0 3RT1456-6SP36-3PA0	1	1 unit 1 unit	41B 41B
S10	400	380	2	2	96 127 200 277	3RT1466-6SF36-3PA0 3RT1466-6SP36-3PA0	1 1	1 unit 1 unit	41B 41B
	500	450	2	2	96 127 200 277	3RT1467-6SF36-3PA0 3RT1467-6SP36-3PA0	1 1	1 unit 1 unit	41B 41B
S12	690	650	2	2	96 127 200 277	3RT1476-6SF36-3PA0 3RT1476-6SP36-3PA0	1 1	1 unit 1 unit	41B 41B

#### SIRIUS 3RT.4 contactors for weak or non-inductive loads (AC-1), 3-pole up to 2 650 A

#### AC/DC operation

- Solid-state operating mechanism
- Version with two laterally mounted auxiliary switches (2 NO + 2 NC each)
- For screw fixing
- Auxiliary and control conductors: Screw terminals
- Main conductors: Busbar connections









3RT1481-6A.36, 3RT1482-6A.36

3RT1483-6AP36

3RT1485-6AP36, 3RT1486-6AP36

3RT1487-6AP36

Rated data according to	Auxilia		Rated control supp	oly voltage U <sub>s</sub>	Busbar	00	PU	PS*	PG
IEC 60947-4-1	contac	cts, lateral			connections		(UNIT,		
AC-1, t <sub>u</sub> : 40 °C	Version	n	50/60 Hz AC	DC			SET, M)		
Operational current $I_{\rm e}$ up to 1 000 V	1	<del> </del>			Article No.	Price per PU			
Α	NO	NC	V	V					
Solid-state operating r	nechai	nism							
With integrated coil cir	cuit				•				
900	2	2	100 127 200 240	100 110 200 220	3RT1481-6AF36 3RT1481-6AP36		1 1	1 unit 1 unit	41B 41B
1 050	2	2	100 127 200 240	100 110 200 220	3RT1482-6AF36 3RT1482-6AP36		1 1	1 unit 1 unit	41B 41B
1 260	2	2	100 240	100 220	3RT1483-6AP36		1	1 unit	41B
1 700	2	2	100 240	100 220	3RT1485-6AP36		1	1 unit	41B
2 100	2	2	100 240	100 220	3RT1486-6AP36		1	1 unit	41B
2 650	2	2	100 240	100 220	3RT1487-6AP36		1	1 unit	41B

Accessories, see next table; spare parts, see page 4/19.

#### Accessories

Overview graphics for 3RT148 contactors with mountable accessories, see page 4/10.

More information	
Manuals, see	
https://support.industry.siemens.com/cs/ww/en/ps/24229/man	

	For contactors	Auxilia Version	ry contact	ts		Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
		\ \	7			Article No.	Price per PU			
	Type	NO	NC	Left	Right					
Second auxiliary s	switch (1 NO +	1 NC)								
40	Lateral mounting	on the r	ight and/	or the left						
3RH1981-1JA11	3RT148.	1	1	61 53 62 54	71   83 2   1   83 72   84	3RH1981-1JA11		1	1 unit	41B

Spare parts												
	For contactors	Auxil	-	ontacts		Rated controvoltage U <sub>s</sub> 50/60 Hz AC		Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		<del> </del>	\ \									
First smilliams on	Type	NO	NC	Left	Right	V	V					
First auxiliary sw	Lateral mou			right an	nd/or			Screw terminals	<b></b>			
55	the left 3RT148.	1	1	Ū				3RH1981-1DA11		1	1 unit	41B
3RH1981-1DA11	3N1140.	ı	1	22 14	31 43 2 32 44			SHII301-IDATT		ı	i uiiit	416
Phase barriers												
	(1 set = 4 u 3RT1481  3RT1483	inits) 						3RT1983-4AA1		1	1 unit	41B
3RT1983-4AA1												
	3RT1485  3RT1487							3RT1987-4AA1		1	1 unit	41B
3RT1987-4AA1 Withdrawable co	ils · AC/DC o	opera	ation									
	3RT1481, 3RT1482					100 127	100 110	3RT1982-5AF31		1	1 unit	41B
	3RT1483					200 240	200 220	3RT1982-5AP31 3RT1983-5AP31		1	1 unit	41B 41B
3RT1982-5A.31, 3RT1983-5AP31												
3RT1987-5AP31	3RT1485  3RT1487					100 240	100 220	3RT1987-5AP31		1	1 unit	41B

SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Overview



3RT231 to 3RT234 and 3RT135 to 3RT137 contactors, with screw terminals

#### Standards

IEC 60947-1, IEC 60947-4-1, IEC60947-5-1 (auxiliary switches)

# Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

Short-circuit and overload protection of main connections

For information on the protection of a free-standing contactor, see the technical product data sheet.

For more information on complete units such as contactors with overload relays or contactors with motor starter protectors as the motor feeder, see Configuration Manual for load feeders.

Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet.

Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

Protection against overvoltage at the control supply voltage connection

3RT23 contactors supplied without a coil circuit can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of diode and Zener diode for short break times) for damping switching overvoltages in the coil and can be ordered separately as accessories, see page 3/97 onwards.

3RT13 contactors are already equipped with coil damping (varistor).

#### Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information about influencing the time response using damping, see Equipment Manual.

#### Connection methods

#### Main circuit

- 3RT231 and 3RT232 contactors:
   Screw terminals or spring-loaded terminals;
   spring-loaded terminals with convenient plug-in design for device connectors
- 3RT233 and 3RT234 contactors:
   Screw terminals with box terminal;
   direct connection to the connecting bar possible with cable lugs for 3RT234 when the box terminal is removed.
- 3RT135 to 3RT137 contactors: Screw terminals with connecting bars that the cables can be connected to using either cable lugs or flexible or rigid bushars
- 3RT136 and 3RT137 contactors: These can be fitted with bus connectors offset, see page 4/35.

#### Auxiliary and control circuits

Screw terminals

#### Electromagnetic compatibility

The contactors fulfill the requirements for environment category A. Note:

When the contactors are used in an environment with frequency converters, the configuration notes must be observed, see Equipment Manual.

Contactors for special applications

#### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Contact reliability of the auxiliary contacts

If voltages  $\leq$  110 V and currents  $\leq$  100 mA are to be switched, the auxiliary contacts of the 3RT contactors or 3RH contactor relays should be used as they guarantee a high level of contact reliability.

These auxiliary contacts are particularly suitable for solid-state circuits with currents  $\geq$  1 mA at a voltage  $\geq$  17 V.

#### Motor protection

#### 3RT23 contactors

For protection against overload, 3RU2 thermal overload relays (see page 7/89 onwards) or 3RB3 electronic overload relays (see page 7/102 onwards) can be mounted on the 3RT23 contactors.

#### 3RT13 contactors

For protection against overload, 3RB2 electronic overload relays (see page 7/114 onwards) can be mounted on the 3RT13 contactors.

#### Operating mechanism types

#### 3RT23 contactors

The contactors are available as versions with conventional AC or DC operating mechanisms or as versions with a wide-range solid-state operating mechanism and a universal actuating voltage (AC or DC operation possible).

Control takes place via the control supply voltage connection A1 - A2 with varying operating ranges (see relevant product data sheet for further details).

#### 3RT13 contactors

The contactors are fitted with a wide-range solid-state operating mechanism that can be controlled with both 50/60 Hz AC and DC.

The operating range of the DC control is 0.8 x  $U_{\rm S~min}$  and 1.1 x  $U_{\rm S~max}$ , and for AC operation 0.85 x  $U_{\rm S~min}$  and 1.1 x  $U_{\rm S~max}$ .

# Replacing solenoid coils, operating mechanisms or spare contacts

#### 3RT23 contactors

Solenoid coil replacement is possible. Only the contacts for 3RT233 contactors can be replaced.

#### 3RT13 contactors

It is not possible to change the operating mechanism or contacts.

### Fitting auxiliary contacts and mounting additional auxiliary switches

#### Features in the delivery state

- 3RT23 contactors
  - 3RT231 contactor:
    - An auxiliary contact is integrated in the basic unit.
  - 3RT232 to 3RT234 contactors:
     The basic units contain two integrated auxiliary contacts (1 NO + 1 NC).
- 3RT13 contactors

These contactors are supplied with two laterally mounted auxiliary switches.

#### Expansion possibilities

All basic units can be expanded using auxiliary switches; the permissible configuration must be observed.

For detailed information about the fitting of auxiliary switches for 3RT23 contactors, see pages 3/81 to 3/86.

#### Accessories and spare parts


- 3RT231 to 3RT234 contactors, see page 3/69 onwards
- 3RT135 to 3RT137 contactors, see page 4/35

Contactors for special applications

SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Overview graphic with mountable accessories

- 3RT23 contactors, see page 3/8 onwards
- 3RT135 to 3RT137 contactors, see following graphic

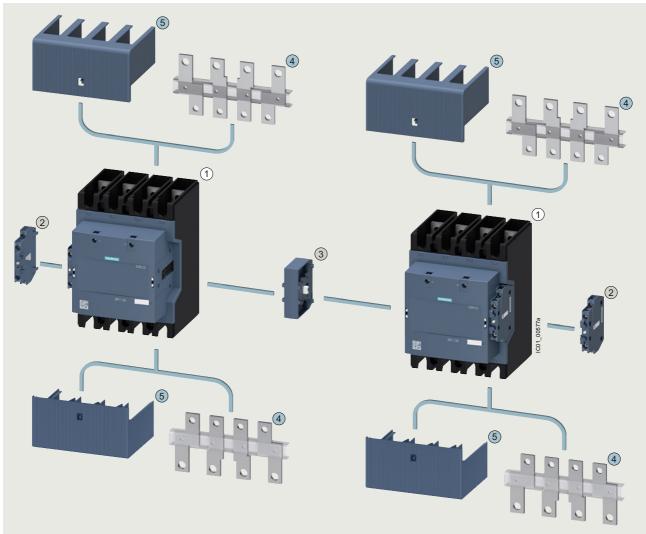

- 4-pole 3RT13 contactors, sizes S6 to S12 (scope of supply: The contactors are supplied with two laterally mounted auxiliary switch blocks)
- ② 3RH1951-1SA11 second auxiliary switch block, can be laterally mounted on the left or right
- 3 3RA1954-3A mechanical interlock for configuring contactor assemblies:

Two 3RT13 contactors of the same size (S6, S10 and S12) can be interlocked with each other. The laterally mounted auxiliary switches of the contactors must be removed beforehand.

The mechanical interlock cannot be used in conjunction with the bus connectors offset  $\overbrace{4}$  .

- (4) 3RT19.6-4D bus connectors offsets, can be mounted on the top or bottom (providing no terminal cover (5) is mounted)
- (5) 3RT19.6-4EB10 terminal covers, can be mounted on the top or bottom (providing no bus connectors offset (4) is mounted)
- Same accessories for sizes S6 to S12
- Different accessories depending on size

			0.10		242					
	Size	S6	S10		S12					
1	Contactor	3RT1355 (I <sub>e</sub> = 200 A)	3RT1363 (I <sub>e</sub> = 275 A)	3RT1364 (I <sub>e</sub> = 350 A)	3RT1373 ( <i>I</i> <sub>e</sub> = 400 A)	3RT1374 (I <sub>e</sub> = 500 A)	$3RT1375$ ( $I_e$ = 525 A)			
2	Second auxiliary switch block		•	3RH195	1-1SA11					
3	Mechanical interlock			3RA19	154-3A					
4	Bus connectors offset		3RT19 (from <i>I</i> >		3RT1976-4D (from <i>I</i> > 450 A)					
5	Terminal cover	3RT1956-4EB10	3RT196	6-4EB10		3RT1976-4EB10				

#### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Application

The 3RT.3 contactors can be used for the following applications:

- 4-pole switching of weak or non-inductive loads (AC-1)
- Disconnecting loads or power generation plants from the grid
- For system transfers

We additionally offer special versions of the 3RT23 contactors for switching motor-driven loads (AC-3).

#### Technical specifications

More information	
	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16165/man
FAQs, see https://support.industry.siemens.com/cs/ww/en/ps/16165/faq	

Туре		3RT2316, 3RT2317	3RT2325 to 3RT2327	3RT2336, 3RT2337	3RT2344, 3RT2346, 3RT2348
Size		S00	S0	S2	S3
General data					
Dimensions (W x H x D)  AC or DC operation  Basic units			(The values in brackets apply for DC operation)		
- Screw terminals - Spring-loaded terminals  • Basic unit with mounted	mm mm	45 x 58 x 73 45 x 70 x 73	60 x 85 x 97 (107) 61 x 102 x 97 (107)	75 x 114 x 130 	96 x 140 x 152 
<ul> <li>auxiliary switch</li> <li>Screw terminals</li> <li>Spring-loaded terminals</li> </ul>	mm mm	45 x 58 x 117 45 x 70 x 121	60 x 85 x 141 (151) 61 x 102 x 145 (155)	75 x 114 x 174	96 x 140 x 196 
Basic unit with mounted function module or solid-state time-delayed auxiliary switch     Consultations and the state of the state		45 v 50 v 147	CO v 0F v 171 (101)	75 v 114 v 204	00 v 140 v 200
<ul><li>Screw terminals</li><li>Spring-loaded terminals</li></ul>	mm mm	45 x 58 x 147 45 x 70 x 147	60 x 85 x 171 (181) 61 x 102 x 171 (181)	75 x 114 x 204 	96 x 140 x 226 
Permissible mounting position					
The contactors are designed for operation on a vertical mounting surface.		360° 22,5° 22,5	NSB0_004786		
Upright mounting position		NSB0_00477a Special ver	sion required		
Mechanical endurance	Oper- ating cycles	30 million	10 million		
Electrical endurance at I <sub>e</sub> /AC-1	Oper- ating cycles	Approx. 0.5 million			
Rated insulation voltage <i>U</i> <sub>i</sub> (pollution degree 3)	V	690			
Protective separation between the coil and the main contacts according to IEC 60947-1, Annex N	V	400			690
Permissible ambient temperature					
During operation	°C	-25 +60			
During storage	°C	-55 +80			

### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

Type	3RT2316, 3RT2317	3RT2325, 3RT2326	3RT2326-10-4AA0	3RT2327
Size	S00	S0		
Short-circuit protection				
Main circuit				
Version of the fuse link required for short-circuit protection of the main circuit				
- For type of coordination 1	gG: 35 A (690 V, 100 kA)	gG: 63 A (690 V, 100 kA)	gG: 100 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 100 A (415 V, 80 kA)	gG: 63 A (690 V, 100 kA)
- For type of coordination 2	gG: 20 A (690 V, 100 kA)		gG: 35 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 35 A (415 V, 80 kA)	gG: 20 A (690 V, 100 kA)
Auxiliary circuit				
Version of the fuse link required for short-circuit protection of the auxiliary switch	Fuse gG: 10 A (690 V	<sup>/</sup> , 1 kA)		
Miniature circuit breaker version required for short-circuit protection of the auxiliary switch	6 A (230 V, 400 A, C o	characteristic)		

Type	3RT2336, 3	DT2227	2DT2244 2DT2246	3RT2346-10-4AA0	3RT2348
	,	on 12337		3H12340-10-4AAU	3N12340
Size	S2		S3		
Short-circuit protection					
Main circuit					
Version of the fuse link required for short-circuit protection of the main circuit					
- For type of coordination 1	gG: 160 A (690 V, 100	kA)	gG: 250 A (690 V, 100 kA)	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)	gG: 250 A (690 V, 100 kA)
- For type of coordination 2	gG: 63 A (690 V, 100 kA)	gR: 80 A (690 V, 100 kA)	gR: 250 A (690 V, 100 kA)	gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)	gR: 250 A (690 V, 100 kA)
Auxiliary circuit					
Version of the fuse link required for short-circuit protection of the auxiliary switch	Fuse gG: 1	0 A (690 V, 1	kA)		
Miniature circuit breaker version required for short-circuit protection of the auxiliary switch	6 A (230 V,	400 A, C ch	aracteristic)		

### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

Туре		3RT231	6 3RT2317	' 3RT2325 3RT2326, 3RT2327	3RT2336, 3RT2337	3RT2344, 3RT2346, 3RT2348
Size		S00		S0	S2	S3
Control						
Solenoid coil operating range						
AC operation	At 50 Hz At 60 Hz	0.8 1. 0.85		0.8 1.1 x <i>U</i> <sub>s</sub>		
DC operation	At 50 °C At 60 °C	0.8 1. 0.85				
AC/DC operation					0.8 1.1 x <i>U</i> <sub>s</sub>	
Power consumption of the solenoid (for cold coil and $1.0 \times U_s$ )	id coils					
• AC operation, 50 Hz, standard ver	sion					
- Closing - P.f. $\varphi$	VA			77 0.82	190 0.72	296 0.61
- Closed - P.f. φ	VA			9.8 0.25	16 0.37	19 0.38
• AC operation, 50/60 Hz, standard	version					
- Closing - P.f. $\varphi$	VA	27/24.3 0.8/0.75	37/33	81/79 0.72/0.74	210/188 0.69/0.65	348/296 0.62/0.55
- Closed - P.f. φ	VA	4.2/3.3 0.25/0.2	5.7/4.4 5	10.5/8.5 0.25/0.28	17.2/16.5 0.36/0.39	25/18 0.35/0.41
• AC operation, 60 Hz, USA, Canada	a					
- Closing - P.f. $\varphi$	VA	31.7 0.77	43	87 0.76	188 0.67	326 0.55
- Closed - P.f. φ	VA	4.8 0.25	6.5	9.4 0.28	16.5 0.37	22 0.4
<ul> <li>AC/DC operation</li> </ul>						
- Closing for AC operation - P.f. $\varphi$	VA	·			40 0.95	151 0.95
- Closed for AC operation - P.f. $\varphi$	VA				2 0.95	3.5 0.95
<ul><li>Closing for DC operation</li><li>Closed for DC operation</li></ul>	W W				23	76 2.7
• DC operation (closing = closed)	W	4		5.9		1)

 $<sup>^{\</sup>rm 1)}$  In the case of AC/DC coils, increased pickup currents (6.5 A on average) arise during the first 200 ms.

Туре			3RT2316	3RT2317	3RT2325	3RT2326	3RT2327	3RT2336	3RT2337	3RT2344	3RT2346	3RT2348
Size			S00		S0			S2		S3		
Rated data of the r	nain contacts											
Load rating with A	С											
Utilization category A	C-1											
<ul> <li>Rated operational currents I<sub>e</sub></li> </ul>	At 40 °C, up to 690 V	Α	18	22	35	40	50	60	110	110	140 (110) <sup>1)</sup>	160
6	At 60 °C, up to 690 V	Α	16	20	30	35	42	55	95	100	130 (100) <sup>1)</sup>	140
• Rated power for AC loads P.f. φ = 0.95 (at 60 °C)	At 230 V 400 V	kW kW	6 10.5	7.5 13	11 20	13 23	16 28	21 36	36 63	38 72	49 92	53 105
Minimum cross- section in the main circuit at maximum AC-1 rated value		mm <sup>2</sup>	2.5	4	10			16	35		50 (35) <sup>1)</sup>	70
Power loss per main	conducting path											
<ul> <li>At I<sub>e</sub>/AC-1</li> </ul>	At 40 °C	W	1.1	1.6	1.8	2.4	3	3.2	9.7	7.3	11.8	15.4
<ul> <li>At I<sub>e</sub>/AC-3</li> </ul>	At 400 V	W				$(2.6)^{1)}$		$(4.3)^{1)}$			$(6.8)^{1)}$	

<sup>1)</sup> The values in brackets apply for 3RT23.6-1...0-4AA0 versions.

#### Data for North America

Technical specifications of 3RT contactors, see page 3/45 onwards.

### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

Typo		2DT12	55-6A.36		2DT126	3-6A.36		2DT126	64-6A.36		2DT127	72-6 A 26	
Туре			55-0A.30			3-0A.30		301130	04-0A.30		3RT137	73-6A.36 74-6A.36 75-6A.36	, ,
Size		S6			S10						S12		
General data		_											
Dimensions  • Width	mm	120			140						104		
Height	mm mm	120 150			140 196						184 225		
• Depth	mm	128			153						180		
Mounting position			tical mounth 0° rotat						0°. or sta	andina			
Installation altitude at height above sea level, maximum	m	2 000								<u> </u>			
Insulation voltage at pollution degree 3													
Of the main circuit	V	1 000											
Of the auxiliary circuit	V	690											
Impulse withstand voltage  • Of the main circuit	kV	8											
Of the auxiliary circuit	kV	6											
Product function, mirror contact according to IEC 60947-4-1		Yes											
Ambient temperature													
<ul><li>During operation</li><li>During storage</li></ul>	°C	-40											
Short-circuit protection													
Version of the fuse link required													
• For short-circuit protection of the main circuit for		gG: 25			gG: 355			gG: 400			gG: 630		
type of coordination 2 • For short-circuit protection of the auxiliary switch	,		100 kA)		(500 V,	100 kA)		(500 V,	100 kA)		(500 V,	100 kA)	
To orion direct protection of the daxillary owner		ga: 10	A (690 V,	1 kA)									
	'	gG: 10	A (690 V,	1 kA)									
Type	'	3RT13	55-		_	3RT136				3RT13			
Туре		3RT13 6AE36	` '		6AR36	6AE36		6AP36	6AR36	_		6AP36	6AR36
Type Size		3RT13	55-		6AR36			6AP36	6AR36	_		6AP36	6AR36
Type Size Control circuit/control		3RT13 6AE36	55-		6AR36	6AE36		6AP36	6AR36	_		6AP36	6AR36
Type Size		3RT13 6AE36	55-		6AR36	6AE36		6AP36	6AR36	_		6AP36	6AR36
Type Size Control circuit/control Operating range factor of the control supply voltage, rated value of the solenoid coil • At AC at 50 Hz		3RT13 6AE36 S6	55- 6AF36		6AR36	6AE36		6AP36	6AR36	_		6AP36	6AR36
Type Size Control circuit/control Operating range factor of the control supply voltage, rated value of the solenoid coil		3RT13 6AE36 S6	55- 6AF36 1.1 1.1		6AR36	6AE36		6AP36	6AR36	_		6AP36	6AR36
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At AC at 60 Hz	W	3RT13 6AE36 S6	55- 6AF36 1.1 1.1		<b>6AR36</b>	6AE36		<b>6AP36</b>	6AR36	_		<b>6AP36</b>	6AR36
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz  • At AC at 60 Hz  • At DC		3RT13 6AE36 S6 0.85	55- 6AF36 1.1 1.1	6AP36		6AE36	6AF36		6AR36	6AE36	6AF36		6AR36
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz	W	3RT13 6AE36 S6 0.85 210	55- 6AF36 1.1 1.1 1.1 130	<b>6AP36</b> 135	205	6AE36 S10	130 175	190	185	<b>6AE36</b> 205	130 175	190	185
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz	W VA VA	3RT13 6AE36 S6 0.85 0.85 210	55- 6AF36 1.1 1.1 1.1 130	6AP36 135	205 205 205 205	6AE36 S10	<b>6AF36</b>	190	185 185	205 165 165	<b>6AF36</b>	190	185 185
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC	W	3RT13 6AE36 S6 0.85 210	55- 6AF36 1.1 1.1 1.1 130	<b>6AP36</b> 135	205	6AE36 S10	130 175	190	185	<b>6AE36</b> 205	130 175	190	185
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz  • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz  • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC	W VA VA W	3RT13 6AE36 S6 0.85 210 225 225 2.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5	130 175 175	190 220 220	185 185 4	205 165 165 2.5	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz  • At AC at 60 Hz  • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz  • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil	W VA VA	3RT13 6AE36 S6 0.85 0.85 210	55- 6AF36 1.1 1.1 1.1 130	6AP36 135	205 205 205 205	6AE36 S10	130 175	190	185 185	205 165 165	130 175	190	185 185
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz  • At AC at 60 Hz  • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz	W VA VA W VA	3RT13 6AE36 S6 0.85 0.85 210 225 225 2.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5	130 175 175	190 220 220	185 185 4	205 165 165 2.5	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At AC at 60 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz • At 50 Hz • At 60 Hz	W VA VA W VA	3RT13 6AE36 S6 0.85 0.85 210 225 225 2.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5	130 175 175	190 220 220	185 185 4	205 165 165 2.5	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz • At 60 Hz	W VA VA W VA	3RT13 6AE36 S6 0.85 0.85 210 225 225 2.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5	130 175 175	190 220 220	185 185 4	205 165 165 2.5	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  • At 60 Hz  Main circuit  Operational current at AC-1  • Up to 690 V  - At an ambient temperature of 40 °C	W VA VA W VA VA	3RT13 6AE36 S6 0.85 210 225 225 2.5 5.5 5.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5	130 175 175	190 220 220	185 185 4	205 165 165 2.5 6 6 6	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  • At 60 Hz  • At 50 Hz • At 60 Hz  • At an ambient temperature of 40 °C  - At an ambient temperature of 60 °C	W VA VA W	3RT13 6AE36 S6 0.85 0.85 210 225 225 2.5 5.5 5.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5 6 6	130 175 175	190 220 220	185 185 4	205 165 165 2.5 6 6	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  • At 60 Hz  • At 90 Hz • A	W VA VA VA A A	3RT13 6AE36 S6 0.85 210 225 225 2.5 5.5 5.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5 6 6 6	130 175 175	190 220 220	185 185 4	205 165 165 2.5 6 6 6	130 175 175	190 220 220	185 185 4
Type  Size  Control circuit/control  Operating range factor of the control supply voltage, rated value of the solenoid coil  • At AC at 50 Hz • At DC  Solenoid coil closing for DC  Closing apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz  Solenoid coil closed for DC  Closed apparent power of the solenoid coil for AC  • At 50 Hz • At 60 Hz • At 60 Hz • At 60 Hz  • At an ambient temperature of 40 °C  - At an ambient temperature of 60 °C	W VA VA W VA VA	3RT13 6AE36 S6 0.85 210 225 225 2.5 5.5 5.5	55- 6AF36 1.1 1.1 1.1 130	135 130 130 3	205 205 205 4	165 165 2.5	130 175 175	190 220 220	185 185 4	205 165 165 2.5 6 6 6	130 175 175	190 220 220	185 185 4

### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

Туре		3RT13	73-			3RT137	74-			3RT137	75-		
		6AE36	6AF36	6AP36	6AR36	6AE36	6AF36	6AP36	6AR36	6AE36	6AF36	6AP36	6AR36
Size		S12											
Control circuit/control													
Operating range factor of the control supply voltage, rated value of the solenoid coil													
<ul><li>At AC at 50 Hz</li><li>At AC at 60 Hz</li><li>At DC</li></ul>		0.85 0.85 0.8 1	1.1										
Solenoid coil closing for DC	W	400	360	410	600	400	360	410	600	400	360	410	600
Closing apparent power of the solenoid coil for AC													
<ul><li>At 50 Hz</li><li>At 60 Hz</li></ul>	VA VA	475 475	340 340	385 385	420 420	475 475	340 340	385 385	420 420	475 475	340 340	385 385	420 420
Solenoid coil closed for DC	W	3.5	2.5	4.5	4.7	3.5	2.5	4.5	4.7	3.5	2.5	4.5	4.7
Closed apparent power of the solenoid coil for AC													
• At 50 Hz • At 60 Hz	VA VA	8.5 8.5	17 17	17.5 17.5	21 21	8.5 8.5	17 17	17.5 17.5	21 21	8.5 8.5	17 17	17.5 17.5	21 21
Main circuit													
Operational current at AC-1													
• Up to 690 V													
- At an ambient temperature of 40 °C - At an ambient temperature of 60 °C	A A	400 350				500 400				525 425			
• Up to 1000 V	^	050				075				400			
<ul> <li>At an ambient temperature of 40 °C</li> <li>At an ambient temperature of 60 °C</li> </ul>	A A	350 300				375 325				400 350			
Туре		3RT13! 6A.36	55-	3RT136 6A.36	63-	3RT136 6A.36	64-	3RT137 6A.36	73-	3RT137 6A.36	74-	3RT137 6A.36	75-
Size		S6		S10				S12					
Conductor cross-sections													
Type of electrical connection for the main circuit		Connec	cting bar		_	Connect bar, bus connect offset > required	tors 275 A	Connec	eting bar	bus cor	eting bar nnectors A require	offset	_
Minimum cross-section in the main circuit at maximum AC-1 rated value	mm <sup>2</sup>	95		150		240				300		370	

Contactors for special applications

#### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Selection and ordering data

#### AC operation ~

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$ 













3RT231.-1A.00

3RT231.-2A.00

3RT232.-1A.00

3RT232.-2A.00


3RT233.-1A.00

3RT234.-1A.00

Rated data AC-1, t <sub>u</sub> : 40/60 °C
Operational current I <sub>e</sub> up to 690 V
A
For screw fixing and

Auxiliary c	ontact	S
Ident. No.	Versi	on
	1	Ļ







Spring-loaded terminals

Article No. Price per PU

Size S00							
18/16				24 110 230		3RT2316-1AB00 3RT2316-1AF00 3RT2316-1AP00	3RT2316-2AB00 3RT2316-2AF00 3RT2316-2AP00
22/20				24 110 230	  	3RT2317-1AB00 3RT2317-1AF00 3RT2317-1AP00	3RT2317-2AB00 3RT2317-2AF00 3RT2317-2AP00
Size S0							
35/30 <sup>1)</sup>	11	1	1	  	24 110 230	3RT2325-1AB00 3RT2325-1AF00 3RT2325-1AP00	3RT2325-2AB00 3RT2325-2AF00 3RT2325-2AP00
40/35 <sup>1)</sup>	11	1	1	  	24 110 230	3RT2326-1AB00 3RT2326-1AF00 3RT2326-1AP00	3RT2326-2AB00 3RT2326-2AF00 3RT2326-2AP00
50/42 <sup>1)</sup>	11	1	1	  	24 110 230	3RT2327-1AB00 3RT2327-1AF00 3RT2327-1AP00	3RT2327-2AB00 3RT2327-2AF00 3RT2327-2AP00
Size S2							
60/55	11	1	1	  	24 110 230	3RT2336-1AB00 3RT2336-1AF00 3RT2336-1AP00	- - -
110/95	11	1	1	  	24 110 230	3RT2337-1AB00 3RT2337-1AF00 3RT2337-1AP00	

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

DIN rails						
Size S3						
110/100	11	1	1	 24	3RT2344-1AB00	
				 110	3RT2344-1AF00	
				 230	3RT2344-1AP00	
140/130	11	1	1	 24	3RT2346-1AB00	
				 110	3RT2346-1AF00	
				 230	3RT2346-1AP00	
160/140	11	1	1	 24	3RT2348-1AB00	-
				 110	3RT2348-1AF00	-
				 230	3RT2348-1AP00	

<sup>1)</sup> Required conductor cross-section 10 mm<sup>2</sup>.

Other voltages according to page 4/52 on request. Accessories and spare parts, see page 3/69 onwards.

Contactors for special applications

SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### AC operation ~

Version for AC-3 and AC-3e motor loads

PU (UNIT, SET, M) = 1 PS\* = 1 unit = 41B







3RT2326-1AP00-4AA0

3RT2336-1AP00-4AA0

3RT2346-1AP00-4AA0

Rated data AC-3/AC-3e, t <sub>u</sub> : up to 60 °C	AC-1, t <sub>u</sub> : 40/60 °C	Auxiliary contacts	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b>+</b>	Spring-loaded terminals	
Operational current $I_{\rm e}$ up to 400 V	Operational current $I_{\rm e}$ up to 690 V	Ident. No. Version	50 Hz AC	Article No.	Price per PU	Article No.	Price per PU
А	Α	NO NC	V				

#### For screw fixing and snap-on mounting on TH 35 DIN rail

Size S	50
--------	----

32	40/35	11	1	1	230	3RT2326-1AP00-4AA0	-
Size S2							
50	60/55	11	1	1	230	3RT2336-1AP00-4AA0	-

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

#### Size S3

95 110/100 <b>11</b> 1 1 230 <b>3RT2346-1AP00-4AA0</b>	
--	--

Other voltages according to page 4/52 on request.

SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### DC operation

PU (UNIT, SET, M) = 1 PS\* PG = 1 unit = 41B









3RT231.-2B.40

Auxiliary contacts Rated control supply

Screw terminals 1 Price per PU Article No.

3RT232.-2B.40 Spring-loaded terminals

Article No.	Price per PU
	per PU

Rated data AC-1, t <sub>u</sub> : 40/60 °C
Operational current $I_{\rm e}$ up to 690 V
Λ.

n-on moi	unting o	n TU 2	DE DIN roll
	NO	NC	V
	\	7	
Ident. No.	Version		DC
, .			voltage U <sub>s</sub>

or	screw	fixing and	l snap-on i	mounting	on TH	35 DIN	rail

For screw fixing	g and snap-on n	nountin	g on I	H 35 DIN rail		
Size S00						
18/16				24 220	3RT2316-1BB40 3RT2316-1BM40	3RT2316-2BB40 3RT2316-2BM40
22/20				24 220	3RT2317-1BB40 3RT2317-1BM40	3RT2317-2BB40 3RT2317-2BM40
Size S0						
35/30 <sup>1)</sup>	11	1	1	24 220	3RT2325-1BB40 3RT2325-1BM40	3RT2325-2BB40 3RT2325-2BM40
40/35 <sup>1)</sup>	11	1	1	24 220	3RT2326-1BB40 3RT2326-1BM40	3RT2326-2BB40 3RT2326-2BM40
50/42 <sup>1)</sup>	11	1	1	24 220	3RT2327-1BB40 3RT2327-1BM40	3RT2327-2BB40 3RT2327-2BM40
43						

<sup>1)</sup> Required conductor cross-section 10 mm<sup>2</sup>.

Other voltages according to page 4/52 on request.

Contactors for special applications

#### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### AC/DC operation

PU (UNIT, SET, M) = 1 PS\* PG = 1 unit = 41B







	3RT2331N	1.30		3RT2341N.30			
Rated data AC-1, t <sub>u</sub> : 40/60 °C	Auxiliary co	ontacts	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b></b>	Spring-loaded to	erminals 💮
Operational current I <sub>e</sub>	Ident. No.	Version	50/60 Hz AC or DC				
up to 690 V		\		Article No.	Price per PU	Article No.	Price per PU
A		NO NC	V				
For screw fixing a	ınd snap-on m	nounting on	TH 35 DIN rail				
Size S2							
With integrated coil (varistor integrated in		the factory)					
60/55	11	1 1	20 33	3RT2336-1NB30			

With integrated of (varistor integrated)		at the fa	ctory)			
60/55	11	1	1	20 33 175 280	3RT2336-1NB30 3RT2336-1NP30	Ξ
110/95	11	1	1	20 33 175 280	3RT2337-1NB30 3RT2337-1NP30	-

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

#### Size S3

With integrated (varistor integra	coil circuit ited in electronics	at the fa	ctory)			
110/100	11	1	1	20 33 175 280	3RT2344-1NB30 3RT2344-1NP30	=
140/130	11	1	1	20 33 175 280	3RT2346-1NB30 3RT2346-1NP30	-
160/140	11	1	1	20 33 175 280	3RT2348-1NB30 3RT2348-1NP30	=

Other voltages according to page 4/52 on request.

SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

AC/DC operation

Version for AC-3 and AC-3e motor loads

PU (UNIT, SET, M) = 1 PS\* PG = 1 unit = 41B



3RT2336-1NB30-4AA0



3RT2346-1NB30-4AA0

Rated data  AC-3/AC-3e,		,	ary contacts No. Version		Rated control supply voltage <i>U</i> <sub>s</sub> 50/60 Hz AC or DC		Screw terminals		Spring-loaded terminals		<u>~</u>
Operational current $I_e$ up to 400 V	Operational current $I_e$ up to 690 V		1	7			Article No.	Price per PU		Article No.	Price per PU
Α	А		NO	NC	V						

#### For screw fixing and snap-on mounting on TH 35 DIN rail

#### Size S2

With integrated coil circuit (varistor integrated in electronics at the factory)

60/55 11 1 1 20 ... 33 3RT2336-1NB30-4AA0

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

#### Size S3

With integrated coil circuit

(varistor integrated in electronics at the factory)

95 110/100 11 1 1 20 ... 33 3RT2346-1NB30-4AA0

Other voltages according to page 4/52 on request.

Contactors for special applications

#### SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Sizes S6 to S12: AC/DC operation

- Solid-state operating mechanism
- Version with two laterally mounted auxiliary switches (2 NO + 2 NC each)
- For screw fixing
- Auxiliary and control circuits: Screw terminals
  Main conductors: Busbar connections; a connection kit is enclosed.







3RT1355-6A.36

3RT1363-6A.36

3RT1373-6A.36

Size	Rated data AC-1, t <sub>u</sub> : 40 °C Operational	Auxili conta latera	icts, Il	Operating range $0.85 \dots 1.1 \times U_{\rm S}$ $0.8 \dots 1.1 \times U_{\rm S}$ Rated control supply voltage $U_{\rm S}$ $0.8 \dots 1.1 \times U_{\rm S}$		Busbar connections	00	PU (UNIT, SET, M)	PS*	PG
	current $I_{\rm e}$ at 690 V	I	<del>,</del>	30/00112710		Article No.	Price per PU			
	А	NO	NC	V	V					
Solid-	state operating m	echanis	m							
With in	tegrated coil circuit	(varistor	integrat	ed in electronics a	t the factory)					
S6	200	2	2	24 60 48 130 100 250 250 500	20 60 48 130 100 250 250 500	3RT1355-6AE36 3RT1355-6AF36 3RT1355-6AP36 3RT1355-6AR36		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
S10	275	2	2	24 60 48 130 100 250 250 500	20 60 48 130 100 250 250 500	3RT1363-6AE36 3RT1363-6AF36 3RT1363-6AP36 3RT1363-6AR36		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
	350	2	2	24 60 48 130 100 250 250 500	20 60 48 130 100 250 250 500	3RT1364-6AE36 3RT1364-6AF36 3RT1364-6AP36 3RT1364-6AR36		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
S12	400	2	2	24 60 48 130 100 250 250 500	20 60 48 130 100 250 250 500	3RT1373-6AE36 3RT1373-6AF36 3RT1373-6AP36 3RT1373-6AR36		1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
	500	2	2	24 60 48 130 100 250 250 500	20 60 48 130 100 250 250 500	3RT1374-6AE36 3RT1374-6AF36 3RT1374-6AP36 3RT1374-6AR36		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
	525	2	2	24 60 48 130 100 250 250 500	20 60 48 130 100 250 250 500	3RT1375-6AE36 3RT1375-6AF36 3RT1375-6AP36 3RT1375-6AR36		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B

Depending on the operational current, bus connectors offset must be used for sizes S10 and S12, see page 4/35:

- Accessories and spare parts, see page 4/35 onwards.
- 3RT136: For more than 275 A, the 3RT1966-4D bus connectors offset must be used.
- 3RT137: For more than 450 A, the 3RT1976-4D bus connectors offset must be used.

SIRIUS 3RT.3 contactors, 4-pole, up to 525 A

#### Accessories

Overview graphic for 3RT135 to 3RT137 contactors with mountable accessories, see page 4/23.

### More information

	301100, 000 page	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			Equipment Manual, see https://support.industry.siemens.com/cs/ww/en/view/60306557							
	For contactors	Auxiliary co	ontacts			Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG		
		\	7									
	Type	NO	NC	Left	Right							
Second auxiliary												
5	Lateral mounting	on the right	and/or the left,	2-pole		Screw terminals	<b>+</b>					
	3RT135 3RT137	1	1	53 61 \	[71   83 F	3RH1951-1SA11		1	1 unit	41B		
3RH1951-1SA11				l54l62	l72 l84							
Terminal covers												
4444	Two units require											
	Either bus conne 3RT135	ectors offset	or terminal cove	ers can be us	sed.	2DT1056 4ED10		4	4 unit	44D		
1 1 10	3RT136					3RT1956-4EB10 3RT1966-4EB10		1	1 unit 1 unit	41B 41B		
3RT1956-4EB10	3RT137					3RT1976-4EB10		1	1 unit	41B		
3RT1966-4EB10												
3RT1976-4EB10												
Bus connectors of	offset											
	(Two units requir Either terminal c		*	set can be us	sed.							
	3RT136					3RT1966-4D		1	1 unit	41B		
3RT1966-4D	3RT137					3RT1976-4D		1	1 unit	41B		
3RT1976-4D												
Mechanical interl												
	Enables two 3RT to be interlocked switches of the c	d with each o contactor mu	ther. The latera st be removed	lly mounted a beforehand.	auxiliary							
	The mechanical bus connectors		not be used in	conjunction	with the							

#### Spare parts

3RH1951-1TA11

3RA1954-3A

Opuro purto										
	For contactors	Auxiliary conta Version	acts			Screw terminals	<b></b>	PU (UNIT, SET, M)	PS*	PG
		\	<del> </del>			Article No.	Price per PU			
	Type	NO	NC	Left	Right					
First auxiliary swi	tch (1 NO + 1 N	C)								
60	Lateral mounting	on the right an	d/or the left, 2-p	oole						
	3RT135 3RT137	1	1	13  21	31   43 2   44	3RH1951-1TA11		1	1 unit	41B

3RA1954-3A

3RT135 ...

3RT137

1 unit

41B

SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC

#### Overview

#### Standards

IEC 60947-1, IEC 60947-4-1, IEC 60947-5-1 (auxiliary switches)

# Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

#### Short-circuit and overload protection of main connections

For information on the protection of a free-standing contactor, see the technical product data sheet.

For more information on complete units such as contactors with overload relays or contactors with motor starter protectors as the motor feeder, see Configuration Manual for load feeders.

#### Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet.

# Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

# <u>Protection against overvoltage at the control supply voltage connection</u>

3RT25 contactors supplied without a coil circuit can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of diode and Zener diode for short break times) for damping switching overvoltages in the coil and can be ordered separately as accessories, see page 3/97 onwards.

#### Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information about influencing the time response using damping, see Equipment Manual.

#### Replacing solenoid coils or spare contacts

Solenoid coil or contact replacement is possible.

# Fitting auxiliary contacts and mounting additional auxiliary switches

#### Features in the delivery state

The 3RT252 to 3RT254 basic units contain two integrated auxiliary contacts (1 NO + 1 NC).

#### Expansion possibilities

All basic units can be expanded using auxiliary switches; the permissible configuration must be observed.

For detailed information about the fitting of auxiliary switches for 3RT25 contactors, see pages 3/81 to 3/86.

#### Accessories

The accessories for the 3-pole SIRIUS 3RT2 contactors can also be used for the 4-pole versions, see page 3/69 onwards.

#### Use of 3RT contactors with IE3 and IE4 motors

#### Note:

For the use of 3RT25 contactors in conjunction with highly efficient IE3 and IE4 motors, please observe the information on dimensioning and configuring, see Application Manual.

More information, see page 1/8.

#### Application

The contactors are suitable:

- · For changing the polarity of hoisting gear motors
- · For switching two separate loads

#### Note:

Single device for pole reversal; not suitable for reversing operation. 3RT25 contactors are not suitable for switching a load between two current sources.

SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC

## Technical specifications

More information						
Technical specifications, see https://support.industry.siemens.cc FAQs, see https://support.industry.	om/cs/ww/en/ps/16169/td siemens.com/cs/ww/en/ps/16169/faq	Manuals, https://su		siemens.com/c	s/ww/en/ps/161	69/man
Туре	3RT2516	to 3RT2518	3RT2526	3RT2535	3RT2536	3RT2544, 3RT2545
Size	\$00		S0	S2		S3

Type Size		3RT2516 to 3RT2518 S00	3RT2526 S0	3RT2535 S2	3RT2536	3RT2544, 3RT254
General data		500	50	52		53
Dimensions (W x H x D)		See 3RT231., page 4/24	See 3RT232., page 4/24	See 3RT233. page 4/24		See 3RT234., page 4/24
Permissible mounting position		1 0 1	, ,	1 0 .		
The contactors are designed for operation on a vertical mounting surface.		360° 22,5° 22,5°	NSB0_00478c			
Upright mounting position		NSB0_00477a Special version require	ed			
Mechanical endurance	Operating cycles	30 million	10 million			
Electrical endurance at I <sub>e</sub> /AC-1	Operating cycles	Approx. 0.5 million				
Rated insulation voltage U <sub>i</sub> (pollution degree 3)	V	690				
Protective separation between the coil and the main contacts according to IEC 60947-1, Annex N	V	400				690
Permissible ambient temperature						
During operation	°C	-25 +60				
During storage	°C	-55 +80				
Short-circuit protection						
Main circuit  Version of the fuse link required for short-circuit protection of the main circuit						
- For type of coordination 1		gG: 35 A (690 V, 100 kA)	gG: 63 A (690 V, 100 kA)	gG: 125 A (690 V, 100 kA)	gG: 160 A (690 V, 100 kA)	gG: 250 A (690 V, 100 kA)
- For type of coordination 2		gG: 20 A (690 V, 100 kA)	gG: 35 A (690 V, 50 kA)	gG: 63 A (690 V, 100 kA)	gG: 80 A (690 V, 100 kA)	gR: 250 A (690 V, 100 kA)
Auxiliary circuit						
Version of the fuse link required for short-circuit protection of the auxiliary switch		Fuse gG: 10 A (690 V,	1 kA)			
Version of the miniature circuit breaker required		6 A (230 V, 400 A, C ch	naracteristic)			

for short-circuit protection of the auxiliary switch

## SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC

Туре		3RT2516-	3RT25	17-1A.	3RT2516-	1B.	3RT2526-	3RT2526	- 3RT	253	3RT253	3RT25	4	3RT254
21.		1A			3RT2517- 3RT2518-	1B,		1B	1A		1N	1A		1N
Size		S00					S0		S2			S3		
Control														
Type of operating mechanism	n	AC			DC		AC	DC	AC		AC/DC	AC		AC/DC
Solenoid coil operating range	е													
AC operation     A	at 50 Hz	0.8 1.1 x <i>U</i> <sub>s</sub>					0.8 1.1 x <i>U</i> <sub>s</sub>		0.8	 x <i>U</i> s		0.8 1.1 x <i>L</i>	l s	
Α	at 60 Hz	0.85 1.1 x <i>U</i> <sub>s</sub>					0.8 1.1 x <i>U</i> <sub>s</sub>		0.8			0.8 1.1 x <i>L</i>	l S	
• DC operation Up to	o 50 °C				0.8 1.1 x <i>U</i> <sub>s</sub>			0.8 1.1 x <i>U</i> <sub>s</sub>						
Up to	o 60 °C				0.85 1.1 x <i>U</i> <sub>s</sub>			0.8 1.1 x <i>U</i> <sub>S</sub>						
AC/DC operation					1.1 × O <sub>S</sub>			1.1 × 0 <sub>S</sub>			0.8 x <i>U</i> <sub>s min</sub>			0.8 x <i>U</i> <sub>s min</sub>
											1.1 x <i>U</i> <sub>s max</sub>	×		1.1 x <i>U</i> <sub>s max</sub>
Power consumption of the solenoid coils (for cold coil and $1.0 \times U_{\rm S}$ )														
<ul> <li>AC operation, 50/60 Hz, standard version</li> </ul>														
- Closing - P.f. φ	VA	27/24.3 0.8/0.75	37/33				81/79 0.72/0.74		210		110 0.95	348/29 0.62/0.		
- Closed	VA	4.2/3.3 0.25/0.25	5.7/4.4				10.5/8.5		17.2	/16.5	2.5	25/18		
<ul><li>P.f. φ</li><li>DC operation</li></ul>		0.25/0.25					0.25/0.28		0.36	5/0.39	0.95	0.35/0.	41	
- Closing	W				4			5.9	23		70			76
- Closed	W				4			5.9	1		1.5			1.8
Туре				3RT2	516 3RT2	2517	3RT2518	3RT252	26	3RT25	35 3RT25	36 3R1	2544	3RT2545
Size				S00			_	S0		S2		S3		_
Rated data of the main co	ontacts													
Load rating with AC														
Utilization category AC-1														
<ul> <li>Rated operational currents I<sub>e</sub></li> </ul>	At 40 °C up At 60 °C up	to 690 V	A A	18 16	22 20			40 35		60 55	70 60	100 90		125 105
<ul> <li>Rated power for AC loads</li> <li>P.f. φ = 0.95 (at 60 °C)</li> </ul>		At 230 V 400 V	kW kW	6 10.5	7.5 13			13.3 23		21 36	23 39	34 40		59 69
<ul> <li>Minimum cross-section in the main circuit at maximum AC-1 rated value</li> </ul>			mm <sup>2</sup>	2.5	4			10		16	25	35		50
Utilization category AC-3								AC <sup>1)</sup>	DC <sup>1)</sup>					
<ul> <li>Rated operational currents I<sub>e</sub> (at 60 °C)</li> </ul>		o to 400 V o to 400 V	A A	9	12		16	25 25	20	35 35	41 41	65 65		80 80
Rated power for slip-ring or squirrel-cage motors		at 230 V at 230 V	kW kW	2.2 2.2	3		4	5.5 5.5		11 11		18.5 18.5		22 22
at 50 and 60 Hz		at 400 V at 400 V	kW kW	4 4	5.5		7.5	11 11	7.5	18.5 18.5	22 22	30 30		37 37

Values for devices with AC and DC operation: For 3RT2526 with DC operation, different values apply to AC-3 for the NC.

Contactors for special applications

SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC

### Selection and ordering data

### AC operation ~

Single device for pole reversal (not suitable for reversing operation)

PU (UNIT, SET, M) = 1 PS\* PG = 1 unit = 41B













3RT251.-1A.00

3RT251.-2A.00

3RT252.-1A.00

3RT252.-2A.00

3RT253.-1A.00

3RT254.-1A.00

AC-3, $t_{\rm U}$ : up to 60 °C Acrising of three-phase current $I_{\rm e}$ motors AC-1, $t_{\rm U}$ : 40/60 °C No. Version 50/60 Hz AC 50 Hz AC Article No. Price per PU up to	Price
tional three-phase current $I_{ m e}$	Drico
up to at 50 Hz and	per PU
400 V 400 V 690 V	
A kW A NO NC V V	

1 01 30	new mamig a	ina snap on i	iii O di i tiii	ıg oı		OU DIII	ıuıı		
Size S	300								
9	4	18/16	-			24 110 230	  	3RT2516-1AB00 3RT2516-1AF00 3RT2516-1AP00	3RT2516-2AB00 3RT2516-2AF00 3RT2516-2AP00
12/9 <sup>1)</sup>	5.5/4 <sup>1)</sup>	22/20	-			24 110 230	  	3RT2517-1AB00 3RT2517-1AF00 3RT2517-1AP00	3RT2517-2AB00 3RT2517-2AF00 3RT2517-2AP00
16/9 <sup>1)</sup>	7.5/4 <sup>1)</sup>	22/20				24 110 230	  	3RT2518-1AB00 3RT2518-1AF00 3RT2518-1AP00	3RT2518-2AB00 3RT2518-2AF00 3RT2518-2AP00
Size S	<i>60</i>								
25	11	40/35	11	1	1	 	24 110 230	3RT2526-1AB00 3RT2526-1AF00 3RT2526-1AP00	3RT2526-2AB00 3RT2526-2AF00 3RT2526-2AP00
Size S	32								
35	18.5	60/55	11	1	1	  	24 110 230	3RT2535-1AB00 3RT2535-1AF00 3RT2535-1AP00	=
41	22	70/60	11	1	1		24 110 230	3RT2536-1AB00 3RT2536-1AF00 3RT2536-1AP00	-

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

Size S	S <i>3</i>						_	
65	30	100/90	11	1	1	 24	3RT2544-1AB00	
						 110	3RT2544-1AF00	
						 230	3RT2544-1AP00	
80	37	125/105	11	1	1	 24	3RT2545-1AB00	
						 110	3RT2545-1AF00	
						 230	3RT2545-1AP00	

<sup>1)</sup> Values for NO contact/NC contact. The NC contact can switch no more than 4 kW.

Other voltages according to page 4/52 on request. Accessories and spare parts, see page 3/69 onwards.

Contactors for special applications

#### SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC

#### DC operation

Single device for pole reversal (not suitable for reversing operation)

PU (UNIT, SET, M) = 1 PS\* = 1 unit = 41B









3RT251.-1B.40

Rated data Auxiliary Rated control supply voltage U<sub>s</sub> AC-1, t<sub>u</sub>: 40/60 °C AC-3. Ident. Version DC No. Ratings of Operational current I<sub>e</sub> three-phase motors up to

3RT252.-2B.40

3RT2526-2BB40

3RT2526-2BM40

 $t_{\rm u}$ : up to 60 °C Operational  $\operatorname{current} I_{\operatorname{e}}$ up to 400 V 400 V

at 50 Hz and kW

690 V

NO NC V

**Screw terminals** Article No. Price per PU

3RT2526-1BB40

3RT2526-1BM40

Spring-loaded terminals Article No. Price per PU

#### For screw fixing and snap-on mounting on TH 35 DIN rail

Size S00	
----------	--

25 (20)<sup>2)</sup> 11 (7.5)<sup>2)</sup>

Size St	)					
16/9 <sup>1)</sup>	7.5/4 <sup>1)</sup>	22/20	 	 24 220	3RT2518-1BB40 3RT2518-1BM40	3RT2518-2BB40 3RT2518-2BM40
12/9 <sup>1)</sup>	5.5/4 <sup>1)</sup>	22/20	 	 24 220	3RT2517-1BB40 3RT2517-1BM40	3RT2517-2BB40 3RT2517-2BM40
9	4	18/16	 	 24 220	3RT2516-1BB40 3RT2516-1BM40	3RT2516-2BB40 3RT2516-2BM40

<sup>1)</sup> Values for NO contact/NC contact. The NC contact can switch no more than 4 kW.

11

40/35

 $<sup>^{2)}\,</sup>$  Value in brackets for NC contact (the deviating value for the NC contact applies only for devices with DC operation).

Other voltages according to page 4/52 on request.

Contactors for special applications

SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC

#### AC/DC operation

Single device for pole reversal (not suitable for reversing operation)

 $\begin{array}{ll} \text{PU (UNIT, SET, M)} = 1 \\ \text{PS*} & = 1 \text{ unit} \\ \text{PG} & = 41 \text{B} \end{array}$ 







3RT254.-1N.30

Rated da	ata		Auxilia contac		Rated control supply voltage U <sub>s</sub>	Screw terminals	<b>+</b>	Spring-lo	paded terminals $\bigcirc$
AC-3, $t_u$ : up to	60 °C	AC-1, t <sub>u</sub> : 40/60 °C		Version	50/60 Hz AC or DC				
Operational current $I_{\rm e}$ up to 400 V	Ratings of three-phase motors at 50 Hz and 400 V	Operational current $I_{\rm e}$ up to		\		Article No.	Price per PU	Article No	o. Price per PU
Α	kW	Α		NO NC	V				

#### For screw fixing and snap-on mounting on TH 35 DIN rail

#### Size S2

With i	ntegrated coil	circuit (varistor int	egrated	in el	ectro	onics at the factory)		
35	18.5	60/55	11	1	1	20 33	3RT2535-1NB30	
						83 155	3RT2535-1NF30	
						175 280	3RT2535-1NP30	-
41	22	70/60	11	1	1	20 33	3RT2536-1NB30	-
						83 155	3RT2536-1NF30	
						175 280	3RT2536-1NP30	-

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

#### Size S3

With i	ntegrated co	oil circuit (varistor inte	egrated	in el	ectro	onics at the factory)		
65	30	100/90	11	1	1	20 33 175 280	3RT2544-1NB30 3RT2544-1NP30	 
80	37	125/105	11	1	1	20 33 175 280	3RT2545-1NB30 3RT2545-1NP30	 

Other voltages according to page 4/52 on request.

SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

#### Overview

#### Standards

IEC 60947-1, IEC 60947-4-1, IEC 60947-5-1, IEC 60831-1, IEC 61921

#### **Function**

The 3RT26 contactors are special versions of the 3RT2, designed for switching capacitive loads (AC-6b) up to 100 kvar at 400 V.

Characteristic components of the 3RT26 contactors are the precharging resistors switched on via leading auxiliary contacts, which are closed before the main contacts. This limits the peak charging current of capacitive loads and thus minimizes negative impacts on the power supply network.

The 3RT26 contactors are suitable for switching choked or unchoked capacitors in reactive current compensation systems and are also used to switch converters.

# Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

Short-circuit and overload protection of main connections

For information on the protection of a free-standing contactor, see the technical product data sheet.

For more information on complete units such as contactors with overload relays or contactors with motor starter protectors as the motor feeder, see Configuration Manual for load feeders.

Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet.

Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

Protection against overvoltage at the control supply voltage connection

3RT26 contactors supplied without a coil circuit can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of diode and Zener diode for short break times) for damping switching overvoltages in the coil and can be ordered separately as accessories, see page 3/97 onwards.

#### Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information about influencing the time response using damping, see Equipment Manual.

## Fitting auxiliary contacts and mounting additional auxiliary switches

Features in the delivery state

• 3RT261 contactors:

The basic units are equipped with a 4-pole front-mounted auxiliary switch with one freely accessible contact. The other three contacts are assigned to the precharging resistors. Additional free auxiliary contacts are provided in the basic unit (depending on the version, 1 NO + 1 NC or 2 NO).

3RT262 contactors:

The basic units are equipped with a 4-pole front-mounted auxiliary switch with one freely accessible contact. The other three contacts are assigned to the precharging resistors. Two additional free auxiliary contacts are provided in the basic unit (1 NO + 1 NC).

• 3RT263 and 3RT264 contactors:

The auxiliary contacts for the resistors are already integrated in the basic units, which do not have any additional integrated and freely assignable auxiliary contacts. A 2-pole lateral auxiliary switch is already mounted on the left (depending on the version, 1 NO + 1 NC or 2 NC).

#### Expansion possibilities

All 3RT263 and 3RT264 contactors can be expanded using lateral auxiliary switches; the permissible configuration must be observed.

Type Size	3RT261 S00	3RT262 S0	3RT263, 3RT264 S2, S3
Number of unassigned auxiliary contacts as delivered from the factory	2	3	2
Number of expansion auxiliary contacts that can be fitted	0	0	2

#### Conductor cross-sections

In order to connect the required minimum cross-section, the use of 3RV2935-5A 3-phase infeed terminal may be necessary for 3RT263 contactors and of 3RA2943-3L 1-phase infeed terminal for 3RT264 contactors, see page 3/110. These infeed terminals enable the clamping of larger cross-sections than the device connection itself actually allows.

For 3RT2628 contactors, this infeed terminal is included in the scope of supply and is mounted on the contactor.

SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

## Technical specifications

More information	
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/16171/td	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16171/man


Type Size

#### 3RT26 S00 to S3

#### Contact endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching capacitive loads (AC-6b) depending on the reactive power  $Q_{\rm N}$  and the rated operational voltage.

The rated operational current  $I_{\rm e}$  complies with utilization category AC-6b (breaking of 1.35 times the rated operational current) and is intended for a contact endurance of approximately 150 000 to 200 000 operating cycles.

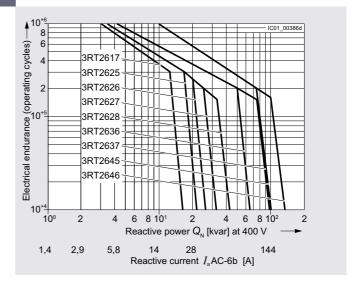

#### SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

All technical specifications not mentioned in the table below are identical to those of the 3RT20 contactors:

- For size S00 as for the 3RT201 contactors
- For size S0 as for the 3RT202 contactors
- For size S2 as for the 3RT203 contactors
- For size S3 as for the 3RT204 contactors

#### See page 3/25 onwards.

Type Size		3RT2617 S00	3RT2625 S0	3RT2626	3RT2627	3RT2628	3RT2636 S2	3RT2637	3RT2645 S3	3RT2646
General data		300	30				32		33	
Dimensions (W x H x D) Including auxiliary switches and connecting cables										
• AC operation	mm	45 x 125 x 120	45 x 135 x	155		45 x 150 x 155	65 x 114 x	130	80 x 140 x	152
<ul> <li>DC operation, AC/DC operation</li> </ul>	mm	45 x 125 x 120	45 x 135 x	165		45 x 150 x 165	65 x 114 x	130	80 x 140 x	152
Permissible mounting position		360°	22,5° 22,5°	780						
The contactors are designed for operation on a vertical mounting surface.				NSB0_004						
Mechanical endurance										
Basic units with mounted auxiliary switch	Operat- ing cycles	3 million								
Electrical endurance	kvar	12.5	16.7	20	25	33	50	75		100
For apparent power at 400 V	Operat- ing cycles	300 000	200 000			150 000	200 000	150 000	200 000	150 000
Rated insulation voltage <i>U</i> <sub>i</sub> (pollution degree 3)	V	690							1 000 <sup>2)</sup>	
Rated impulse withstand voltage $U_{\rm imp}$	kV	6							8 <sup>2)</sup>	
Protective separation between the coil and the main contacts according to IEC 60947-1, Annex N	V	400							690	
Permissible ambient temperature										
<ul> <li>During operation<sup>1)</sup></li> </ul>	°C	-25 +60								
During storage	°C	-55 +80								
Short-circuit protection										
Main circuit										
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1										
Type of coordination "1"	Α	25 40	32 80	40 80	50 100	63 100	100 160	160 200		200 250
Auxiliary circuit										
• With fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE With short-circuit current $I_{\rm k}$ = 1 kA according to IEC 60947-5-1	Α	10								
<ul> <li>With miniature circuit breakers with C characteristic with short-circuit current I<sub>k</sub> = 400 A</li> </ul>	Α	10								

<sup>1)</sup> A clearance of 10 mm is required for side-by-side mounting.

<sup>&</sup>lt;sup>2)</sup> Only applies for main conducting paths, otherwise  $U_{\rm i}$  = 690 V;  $U_{\rm imp}$  = 6 kV.

Contactors for special applications

## SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

Туре		3RT2617-1A, -1B	3RT2625-1A, -1B, 3RT2626-1A, -1B, 3RT2627-1A, -1B, 3RT2628-1A, -1B	3RT2636-1A, 3RT2637-1A	3RT2645-1A, 3RT2646-1A
Size		S00	S0	S2	S3
Control					
Solenoid coil operating range					
AC operation	50 Hz 60 Hz	0.8 1.1 x U <sub>s</sub> 0.85 1.1 x Ü <sub>s</sub>	0.8 1.1 x <i>U</i> <sub>s</sub>		
• DC operation	At 50 °C At 60 °C	0.8 1.1 x <i>U</i> <sub>s</sub> 0.85 1.1 x <i>U</i> <sub>s</sub>	0.8 1.1 x <i>U</i> s	 	
Power consumption of the solenoid control (for cold coil and $1.0 \times U_s$ )	oils				
• AC operation, 50 Hz, standard version	ı				
- Closing - P.f. $\varphi$ - Closed	VA VA	  	77 0.82 9.8	190 0.72 16	296 0.61 19
- P.f. $\varphi$	nian		0.25	0.37	0.38
<ul> <li>AC operation, 50/60 Hz, standard versely.</li> <li>Closing</li> <li>P.f. φ</li> <li>Closed</li> <li>P.f. φ</li> </ul>	VA VA	49 0.8 7.8 0.25	81/79 0.72/0.74 10.5/8.5 0.25/0.28	210/188 0.69/0.65 17.2/16.5 0.36/0.39	348/296 0.62/0.55 25/18 0.35/0.41
<ul><li>DC operation</li><li>Closing</li><li>Closed</li></ul>	W W	4 4	5.9 5.9	=	

Туре		3RT2621NB35	3RT2621NF35	3RT2621NP35	3RT2631N.35	3RT2641N.35
Size		S0			S2	S3
Control						
Solenoid coil operating range						
• AC/DC operation (50/60 Hz AC or DC)		0.7 1.3 x <i>U</i> <sub>s</sub>			0.8 1.1 x <i>U</i> <sub>s</sub>	
Power consumption of the solenoid coils (for cold coil and 1.0 $\times$ $U_{\rm S}$ )						
<ul> <li>AC operation, 50/60 Hz, standard version</li> </ul>						
- Closing	VA	6.6/6.7	11.9/12.0	12.7/14.7	110	163
- P.f. φ - Closed	VA	0.98/0.98 1.9/2.0	1.6/1.8	3.9/4.3	0.95 2.5	 3.1
- Closed - P.f. φ	VA	0.86/0.82	0.79/0.74	0.51/0.56	0.95	J. 1 
DC operation						
- Closing	W	5.9	10.2	14.3	70	76
- Closed	W	1.4	1.3	1.9	1.5	1.8
Maximum permissible residual current of the electronics (with 0 signal)						
• AC operation (230 V/U <sub>s</sub> )	mA	7			< 20	
<ul> <li>DC operation (24 V/U<sub>s</sub>)</li> </ul>	mΑ	16			< 20	

## SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

At 600 V kA

Class RK5 A

5

40

80

Tupo		3RT2617	2DT2625	3RT2626	3RT2627	2072620	3RT2636	3RT2637	3RT2645	3RT2646
Type Size		S00	S0	3N12020	3H12021	3H 12020	S2	3H12031	S3	3H 12040
Auxiliary circuit			00				O2		00	
Auxiliary contacts (unassign	ned)	1 NO + 1 NC, 2 NC	1 NO + 2	NC		1 NO + 1	NC, 2 NC			
Further auxiliary switches, laterally mountable							No more to	han one late ed.	ral auxiliary	switch can
Technical specifications inclurated data of the auxiliary co "3RT20 contactors", page 3/2										
Rated data of the main	contacts									
Load rating with AC										
Utilization category AC-6b Switching of AC capacitors	<b>;</b>									
<ul> <li>Rated operational current I<sub>e</sub> at AC-6b</li> </ul>										
<ul><li>Up to 690 V at ambient temperature</li><li>Up to 1 000 V at ambient temperature</li></ul>	40 °C A 60 °C A 60 °C A	18.9 18 	25.3 24	30.2 29	37.8 36	50 47.6	75.8 72.2	113.4 108	113 54	151 144 68
Rated operational reactive power at rated operational voltage	230 V, 50/60 Hz kvar <b>400 V, 50/60 Hz kvar</b> 500 V, 50/60 Hz kvar 690 V, 50/60 Hz kvar 1 000 V, 50/60 Hz kvar	7.2 <b>12.5</b> 15 21	9.6 <b>16.7</b> 21 29	11.5 <b>20</b> 25 34	14 <b>25</b> 31 43	19 <b>33</b> 41 57	29 <b>50</b> 63 86	43 <b>75</b> 94 129	94	57 <b>100</b> 125 172 125
Minimum cross-section in the main circuit for max. AC-6b rated value		<ul> <li>Operatir</li> </ul>	ng instruction	ns and mar	nuals, '	itor contacto		acitors		
@ and @ rated data										
Rated insulation voltage	V AC	600								
Operational reactive power at AC-6b, 3-phase, at operational voltage	110 120 V kvar 200 208 V kvar 220 230 V kvar 460 480 V kvar 575 600 V kvar	3.4 6.2 6.9 14	4.6 8.3 9.2 18 23	5.5 10 11 22 27	6.3 11 13 25 31	8.3 15 17 33 41	14 25 27 55 69	19 34 38 75 94	20 37 41 82 103	25 45 50 100 125

10

250

100

Short-circuit protection

Fuse for main circuit

SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

Туре		3RT2617	3RT2625, 3RT2626,	3RT2628	3RT2636	3RT2637	3RT2645, 3RT2646
			3RT2627				
Size		S00	S0		S2		S3
Conductor cross-sections							
Main conductors (1 or 2 conductors can be connected)		Screw termina					
Solid or stranded	mm <sup>2</sup>	$2 \times (0.5 \dots 1.5)^{1)}$ . $2 \times (0.75 \dots 2.5)^{1)}$ ; max. $2 \times 4$	2 x (1 2.5) <sup>1).</sup> 2 x (2.5 10) <sup>1</sup> )		2 x (2.5 35); 1 x (2.5 50)		2 x (10 70); 1 x (10 70)
• Finely stranded with end sleeve (DIN 46228)	mm <sup>2</sup>	2 x (0.5 1.5) <sup>1)</sup> . 2 x (0.75 2.5) <sup>1</sup> )	2 x (1 2.5) <sup>1)</sup> ; 2 x (2.5 6) <sup>1)</sup> ; 1 x 10	1 x (2.5 16)	2 x (1 25); 1 x (1 35)		2 x (10 50); 1 x (10 50)
<ul> <li>AWG cables, solid or stranded</li> </ul>	AWG	2 x (20 16) <sup>1)</sup> ; 2 x (18 14) <sup>1)</sup> ; 2 x 12	2 x (16 12) <sup>1)</sup> ; 2 x (14 8) <sup>1)</sup>	1 x (10 4)	2 x (18 2); 1 x (18 0)		2 x (8 3/0); 1 x (8 3/0)
Terminal screw		M3 (for Pozidriv size 2; Ø 5 6 mm)	M4 (for Pozidriv size 2; Ø 5 6 mm)	M8	M6 (for Pozidriv size Ø 5 6 mm)	2;	M8 (hexagon socket, A/F 4)
Tightening torque	Nm lb.in	0.8 1.2 7 10.3	2 2.5 18 22	3 4 27 36	3 4.5 27 40		4.5 6 40 53
Auxiliary conductors (1 or 2 conductors can be connected)							
Solid or stranded	mm <sup>2</sup>	2 x (0.5 1.5) <sup>1)</sup> . 2 x (0.75 2.5) <sup>1)</sup> ; m	nax. 2 x 4				
<ul> <li>Finely stranded with end sleeve (DIN 46228)</li> </ul>	mm <sup>2</sup>	2 x (0.5 1.5) <sup>1).</sup> 2 x (0.75 2.5) <sup>1</sup> )					
AWG cables, solid or stranded	AWG	2 x (20 16) <sup>1)</sup> ; 2 x (18 14) <sup>1)</sup> ; 2 x 12					
Terminal screw		M3 (for Pozidriv size 2; Ø 5 6 mm)					
Tightening torque	Nm lb.in	0.8 1.2 7 10.3					

<sup>1)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Contactors for special applications

### SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

#### Selection and ordering data

#### AC operation ~

Main, auxiliary and control conductors: Screw terminals







3RT262.-1A.05



3RT2628-1A.05 with infeed terminal

Switching	on category g AC capacit bient temper	tors	°C	Auxili conta unass		Rated con voltage U <sub>s</sub>		Screw terminals	<b></b>	PU (UNIT, SET, M)	PS*	PG
			•	Version	on	50 Hz AC	50/60 Hz AC					
	r rating at nal voltage 5	0/60 Hz		1	<del>}</del>			Article No.	Price per PU			
at 230 V	at 400 V	at 500 V	at 690 V	1								
kvar	kvar	kvar	kvar	NO	NC	V	V					
For scr	ew fixing a	and snap-	on mounti	ng on	TH 35 C	IN rail						
Size S0	0											
7.2	12.5	15	21	1	1	 	24 110 230	3RT2617-1AB03 3RT2617-1AF03 3RT2617-1AP03		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
7.2	12.5	15	21	0	2	  	24 110 230	3RT2617-1AB05 3RT2617-1AF05 3RT2617-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
Size S0	)											
9.6	16.7	21	29	1	2	24 110 230	  	3RT2625-1AB05 3RT2625-1AF05 3RT2625-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
11.5	20	25	34	1	2	24 110 230	  	3RT2626-1AB05 3RT2626-1AF05 3RT2626-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
14	25	31	43	1	2	24 110 230	  	3RT2627-1AB05 3RT2627-1AF05 3RT2627-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
19	33	41	57	1	2	24 110 230	  	3RT2628-1AB05 3RT2628-1AF05 3RT2628-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

Other voltages according to page 4/52 on request.

Contactors for special applications

SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

#### AC operation ~

Main, auxiliary and control conductors: Screw terminals







3RT2641A
----------

			3H12b31	A.U5			3R12641A.05				
Switching	on category A g AC capacito bient tempera	ors		Auxili conta unass Versio	cts, signed	Rated control supply voltage <i>U</i> <sub>s</sub> 50 Hz AC	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
operation	r rating at nal voltage 50/			\ \	7		Article No.	Price per PU			
at 230 V kvar	at 400 V kvar	at 500 V kvar	at 690 V kvar	NO	NC	٧					
	ew fixing ar										
Size S2		na snap-or	i illoulitilig	OII III	00 DIN	Idii					
29	50	63	86	1	1	24 110 230	3RT2636-1AB03 3RT2636-1AF03 3RT2636-1AP03		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
29	50	63	86	0	2	24 110 230	3RT2636-1AB05 3RT2636-1AF05 3RT2636-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
43	75	94	129	1	1	24 110 230	3RT2637-1AB03 3RT2637-1AF03 3RT2637-1AP03		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
43	75	94	129	0	2	24 110 230	3RT2637-1AB05 3RT2637-1AF05 3RT2637-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
For scr	ew fixing ar	nd snap-on	mounting	on TH	35-15 aı	nd TH 75-15 DIN rails					
Size S3	1										
43	75	94	129	1	1	24 110 230	3RT2645-1AB03 3RT2645-1AF03 3RT2645-1AP03		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
43	75	94	129	0	2	24 110 230	3RT2645-1AB05 3RT2645-1AF05 3RT2645-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
57	100	125	172	1	1	24 110 230	3RT2646-1AB03 3RT2646-1AF03 3RT2646-1AP03		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
57	100	125	172	0	2	24 110 230	3RT2646-1AB05 3RT2646-1AF05 3RT2646-1AP05		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

Other voltages according to page 4/52 on request.

Accessories, see page 3/69 onwards.

Contactors for special applications

#### SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

#### DC operation

Main, auxiliary and control conductors: Screw terminals







3RT262.-1B.45



3RT2628-1B.45 with infeed terminal

Switching	n category A AC capacit bient tempera	ors	C	Auxilia conta- unass Versio	cts, igned	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
	al voltage 50			1	7		Article No.	Price per PU			
at 230 V	at 400 V	at 500 V	at 690 V	'	1						
kvar	kvar	kvar	kvar	NO	NC	V					
	ew fixing a	ind snap-d	on mounti	ng on	TH 35 L	DIN rail					
Size S0	0										
7.2	12.5	15	21	1	1	24 110	3RT2617-1BB43 3RT2617-1BF43		1 1	1 unit 1 unit	41B 41B
7.2	12.5	15	21	0	2	24 110	3RT2617-1BB45 3RT2617-1BF45		1 1	1 unit 1 unit	41B 41B
Size S0											
9.6	16.7	21	29	1	2	24 110	3RT2625-1BB45 3RT2625-1BF45		1 1	1 unit 1 unit	41B 41B
11.5	20	25	34	1	2	24 110	3RT2626-1BB45 3RT2626-1BF45		1	1 unit 1 unit	41B 41B
14	25	31	43	1	2	24 110	3RT2627-1BB45 3RT2627-1BF45		1 1	1 unit 1 unit	41B 41B
19	33	41	57	1	2	24 110	3RT2628-1BB45 3RT2628-1BF45		1	1 unit 1 unit	41B 41B

Other voltages according to page 4/52 on request.

Accessories, see page 3/69 onwards.

Contactors for openial applications

### SIRIUS 3RT26 contactors for capacitive loads (AC-6b), 3-pole

#### AC/DC operation

Main, auxiliary and control conductors: Screw terminals







3RT2628-1N.35



3RT263.-1N.35



3RT264.-1N.35

JN1202	- IIV.33				nfeed ter		3H12031IV.33		3N120411	V.33	
Switching	Utilization category AC-6b Switching AC capacitors at an ambient temperature of 60 °C		°C	Auxilia conta unass Versio	cts, signed	Rated control supply voltage $U_{\rm S}$ 50/60 Hz AC or DC	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
	or rating at nal voltage 5	60/60 Hz		\I	4		Article No.	Price per PU			
at 230 V	at 400 V	at 500 V	at 690 V		I						
kvar	kvar	kvar	kvar	NO	NC	V					
	rew fixing	and snap-	on mounti	ng on	TH 35 I	DIN rail					
<b>Size S0</b> 9.6	16.7	21	29	1	2	21 28 95 130 200 280	3RT2625-1NB35 3RT2625-1NF35 3RT2625-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
11.5	20	25	34	1	2	21 28 95 130 200 280	3RT2626-1NB35 3RT2626-1NF35 3RT2626-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
14	25	31	43	1	2	21 28 95 130 200 280	3RT2627-1NB35 3RT2627-1NF35 3RT2627-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
19	33	41	57	1	2	21 28 95 130 200 280	3RT2628-1NB35 3RT2628-1NF35 3RT2628-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
Size S2	2										
29	50	63	86	0	2	20 33 83 155 175 280	3RT2636-1NB35 3RT2636-1NF35 3RT2636-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
43	75	94	129	0	2	20 33 83 155 175 280	3RT2637-1NB35 3RT2637-1NF35 3RT2637-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
		and snap-c	on mountii	ng on T	ГН 35-1	5 and TH 75-15 DIN rails					
Size S3	3										
43	75	94	129	0	2	20 33 83 155 175 280	3RT2645-1NB35 3RT2645-1NF35 3RT2645-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
57	100	125	172	0	2	20 33 83 155 175 280	3RT2646-1NB35 3RT2646-1NF35 3RT2646-1NP35		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

Other voltages according to page 4/52 on request.

Accessories, see page 3/69 onwards.

Contactors for special applications

#### SIRIUS 3RT23 to 3RT26, 3RT14 contactors

#### Options

# Rated control supply voltages for 3RT2 contactors, possible on request (change of the 10th and 11th digits of the article number)

Delivery time on request

Contactor type	3RT231, 3RT251	3RT232, 3RT252	3RT233, 3RT253	3RT234, 3RT244, 3RT254	3RT2617, 3RT262, 3RT263, 3RT264
Size	S00	S0	S2	S3	S00 to S3
nd 60 Hz <sup>2)</sup> )					
	B0 D0 H0 F0 P0  V0	B0 D0  F0 P0  V0	B0 D0  F0 P0 U0 V0	B0 D0 H0 F0 P0 U0 V0	B0   F0 P0 
60 Hz <sup>2)</sup>					
	B0 D0 H0 F0 N2 P0	C2 D2 H2 G2 N2 L2	C2 D2 H2 G2 N2 L2	C2 D2 H2 G2 N2 L2	C2    N2 L2
ınd Canada <sup>3)</sup> )					
	K6 P6	K6 P6	K6 P6	K6 P6	 
OVAC	G6 N6 R6	G6 N6 R6	G6 N6 R6	G6 N6 R6	G6 N6 R6
	A4 B4 D4 W4  F4 G4 M4 P4	A4 B4 D4 W4  F4 G4 M4	     	       	 B4    F4 
		Size S00  Ind 60 Hz <sup>2)</sup> B0 D0 H0 F0 P0 V0  I 60 Hz <sup>2)</sup> B0 D0 H0 F0 N2 P0 N2 P0  Ind Canada <sup>3)</sup> ) Hz  O V AC O	Size S00 S0  md 60 Hz <sup>2</sup> )  B0 B0 B0 D0 H0 F0 F0 P0	Size S00 S0 S2    S00 S0 S2   S2   S2   S2   S3   S2   S2   S2	3RT251 3RT252 3RT253 3RT244, 3RT254 3

#### Examples

**AC operation** 3RT2325-1A**P0**0 3RT2325-1A**G2**0

Contactor with screw terminals; with solenoid coil for 50 Hz for rated control supply voltage 230 V AC Contactor with screw terminals; with solenoid coil for 50/60 Hz for rated control supply voltage 110 V AC

DC operation 3RT2526-2B**B4**0 Contactor with spring-loaded terminals; for rated control supply voltage of 24 V DC Contactor with spring-loaded terminals; for rated control supply voltage 125 V DC

- at 50 Hz: 0.8 to 1.1 x U<sub>s</sub>,
- at 60 Hz: 0.85 to 1.1 x  $U_{\rm s}$
- 3) Coil operating range
  - Size S00:
  - at 50 Hz: 0.85 to 1.1 x  $U_{\rm s}$ , at 60 Hz: 0.8 to 1.1 x  $U_{\rm s}$ ,
  - Sizes S0 to S3: at 50 Hz and 60 Hz: 0.8 to 1.1 x U<sub>s</sub>

- 4) Coil operating range
  - Size S00: at 50/60 Hz: 0.85 to 1.1 x U<sub>s</sub>
  - Sizes S0 to S3: at 50 Hz: 08 to 1.1 x  $U_{\rm S}$ , at 60 Hz: 0.85 to 1.1 x  $U_{\rm S}$
- <sup>5)</sup> Coil operating range at 60 Hz: 0.8 to 1.1 x  $U_s$ .

Rated control supply		3RT2.2N	Rated control supply		3RT2.3N	3RT2.4N
voltage	type		voltage	type		
U <sub>s min</sub> to U <sub>s max</sub> ''	Size	\$0	$U_{\rm s  min}$ to $U_{\rm s  max}$	Size	S2	S3

# Sizes S0 to S3 AC/DC operation (50/60 Hz AC or DC)

AOIDO operation (ooioo i	TIE AO OI DO				
21 28 V AC/DC	B3	20 33 V AC/DC	B3	B3	
95 130 V AC/DC	F3	48 80 V AC/DC	E3	E3	
200 280 V AC/DC	P3	83 155 V AC/DC	F3	F3	
		175 280 V AC/DC	P3	P3	

 $<sup>^{1)}</sup>$  Coil operating range: 0.8 x  $U_{\rm S~min}$  to 1.1 x  $U_{\rm S~max}$ 

<sup>&</sup>lt;sup>1)</sup> For deviating coil voltages and operating ranges of sizes S00 and S0, a SITOP 24 V DC power supply with wide-range input can be used for the coil control, see page 15/1 and Catalog KT 10.1.

<sup>2)</sup> Coil operating range

Contactors for special applications

SIRIUS 3RT23 to 3RT26, 3RT14 contactors

Rated control supply voltages for 3RT14 contactors, possible on request (change of the 10th and 11th digits of the article number)

Delivery time on request

Rated control supply voltage	type	3RT145A, 3RT146A, 3RT147A	Rated control supply voltage	type	3RT145N, 3RT146N, 3RT147N	3RT145P, 3RT145S, 3RT146P, 3RT146S, 3RT147P, 3RT147S
$U_{\rm smin}$ to $U_{\rm smax}$	Sizes	S6 to S12	$U_{\rm s\ min}$ to $U_{\rm s\ max}$	Sizes	S6 to S12	

#### Sizes S6 to S12

AC/DC operation (50/60 Hz AC or DC) and operating range 0.8 x  $U_{\rm s\,min}$  to 1.1 x  $U_{\rm s\,max}$ 

Standard operating mechanism		Solid-state operating mechanism		
23 26 V AC/DC 42 48 V AC/DC 110 127 V AC/DC 200 220 V AC/DC 220 240 V AC/DC	B3 D3 F3 M3 P3	21 27.3 V AC/DC 96 127 V AC/DC 200 277 V AC/DC	B3 F3 P3	 F3 P3
240 277 V AC/DC 380 420 V AC/DC 440 480 V AC/DC 500 550 V AC/DC 575 600 V AC/DC	U3 V3 R3 S3 T3			

Contactors for special applications Contactors for railway applications

SIRIUS 3RT contactors with extended operating range, 3-pole

#### Overview

#### Standards

IEC 60947-4-1, IEC 60077-2, EN 50155

#### Performance range

Sizes S00 to S3

 3RT20 contactors for motor loads (AC-3 and AC-3e) up to 110 A/55 kW

#### Sizes S6 to S12

- 3RT10 contactors for motor loads (AC-3 and AC-3e) from 55 kW to 500 A/250 kW
- 3RT14 contactors for weak or non-inductive loads (AC-1) up to 690 A

#### Application

Besides standard approval in compliance with IEC 60947-4-1, the contactors with an extended operating range are also approved in compliance with the relevant parts of IEC 60077-2, thus fulfilling the requirement for use in railway applications.

Thus, their suitability for increased requirements such as an

- extended temperature range compared to the IEC 60947-4-1 product standard or
- extended operating range of the contactor operating mechanisms or also
- increased resistance to mechanical oscillations and vibrations is warranted. The design of the terminals in the spring-loaded connection system also contributes toward vibration resistance.

#### Operating range of contactor operating mechanisms

The contactors with extended operating range and railway approval are available with a solid-state DC operating mechanism in all sizes from S00 to S12.

This operating mechanism version has an operating range from 0.7 to 1.25 x  $U_{\rm S}$  in the temperature range -40 to 70 °C.

As from size S6, the operating mechanisms are equipped with an additional control input that can be operated between 24 DC and 110 V. This function can optionally be switched on or off via a selector switch.

# Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

Short-circuit and overload protection of main connections

For information on the protection of a free-standing contactor, see the technical product data sheet.

For more information on complete units such as contactors with overload relays or contactors with motor starter protectors as the motor feeder, see Configuration Manual for load feeders.

Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet.

Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

Short-circuit and overload protection of contactors with a digital input

A typical rated current of 20 mA applies to these inputs based on the PLC input types according to IEC 60947-4-1.

The inputs can be protected accordingly (for 3RT1...-X contactors, marked with IN+/IN-). The supply voltage connections A1 - A2 must be protected based on the load characteristics.

For information on power consumption, see the technical product data sheet.

Protection against overvoltage at the control supply voltage connection

3RT contactors are already equipped with coil damping (varistor).

#### Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information about influencing the time response using damping, see Equipment Manual.

Contactors for special applications Contactors for railway applications

#### SIRIUS 3RT contactors with extended operating range, 3-pole

# Fitting auxiliary contacts and mounting additional auxiliary switches

#### Features in the delivery state

- 3RT20 contactors:
  - 3RT201 contactors:
  - An auxiliary contact is integrated in the basic unit.
  - Contactors 3RT202 to 3RT204:
  - The basic units contain two integrated auxiliary contacts (1 NO + 1 NC).
- 3RT10 and 3RT14 contactors:
  - These contactors are supplied with two laterally mounted auxiliary switches. The fitting of auxiliary switches is possible on the front and on the side.

#### Expansion possibilities

All basic units (with the exception of coupling contactors in size S00) can be expanded using auxiliary switches; the permissible configuration must be observed.

Detailed information about the fitting of auxiliary switches for 3RT20 contactors, see pages 3/81 to 3/86.

#### Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full operating range of the operating mechanisms) is -40 to +70  $^{\circ}$ C.

#### Side-by-side mounting

#### Contactors with conventional operating mechanism

Sizes S00 and S0:

Side-by-side mounting is permissible at ambient temperatures up to 60 °C. At > 60 to 70 °C, a clearance of at least 10 mm shall be provided.

#### Contactors with series resistor

• Size S00:

Side-by-side mounting is permissible at ambient temperatures up to 70 °C.

# Contactors with solid-state operating mechanism (version: 3RT....-....-0LA2)

- Sizes S00 to S3:
  - Side-by-side mounting is permissible at ambient temperatures up to 70 °C.
- Sizes S6 to S12:
  - Side-by-side mounting is permissible at ambient temperatures up to 60 °C. At > 60 to 70 °C, a clearance of at least 10 mm shall be provided.

Contactors for special applications Contactors for railway applications

#### SIRIUS 3RT contactors with extended operating range, 3-pole

#### Technical specifications

More information	
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/16177/td FAQs, see https://support.industry.siemens.com/cs/ww/en/ps/16177/faq	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16177/man Guide of use for contactors in safety applications, see https://support.industry.siemens.com/cs/ww/en/view/109807687

Туре			3RT2017	3RT2017 2XB4 0LA2	2XF4 0LA2	3RT2018 2XB4 0LA2	- 2XF4 0LA2	3RT202.	3RT202 2XB40- 0LA2	2XF40- 0LA2
Size			S00					S0		
General data										
Upright mounting position										
<ul><li>Contactors with series resistor</li><li>Contactors with conventional coil</li></ul>				Special version (on request) Special version (on request)						
Ambient temperature										
<ul> <li>During operation</li> </ul>		°C	-40 +70 <sup>1)</sup>	<sup>)</sup> -40 +7	0					
During storage		°C	-55 +80							
Control										
Solenoid coil operating range	DC		0.7 1.25 >	x U <sub>s</sub>						
Power consumption of the solenoid c	oils		For cold coi	il and 1.0 x	$U_{s}$					
Contactors with series resistor	Closing Closed	W W	13 4.0							
Contactors with conventional coil	Closing Closed	W W	2.8 2.8					4.5 4.5		
<ul> <li>Contactors with solid-state operating mechanism</li> </ul>	Closing Closed	W W		4.0 0.95	4.5 0.75	4.0 0.95	4.5 0.75		6.7 1.4	13.2 1.3

#### Rated data of the main contacts

#### Load rating with AC

Minimum cross-section in the main circuit					
<ul> <li>At maximum AC-1 rated value</li> </ul>	$mm^2$	4		10	
<ul> <li>At maximum I<sub>th</sub> rated value</li> </ul>	$mm^2$		4		10

<sup>1) 3</sup>RT20..-.K contactors without the article number suffix "-0LA2" are coupling contactors that are certified for the -25 to +60 °C standard temperature range. For railway applications, an additional certification approves these contactors with a minimum clearance of 10 mm for the extended temperature range from -40 to +70 °C.

All details and technical specifications not mentioned here are identical to those of the basic units, see page 3/25 onwards.

50

Туре			3RT203 3XB40- 0LA2	3XF40-		6- 3XF40- 0LA2	3RT203 3XB40- 0LA2		8- 3XF40- 0LA2	3RT204. 3XB40- 0LA2	='
Size			S2							S3	
General data											
Ambient temperature											
<ul> <li>During operation</li> </ul>		°C	-40 +7	70							
<ul> <li>During storage</li> </ul>		°C	-55 +8	30							
Control											
Solenoid coil operating range	DC		0.7 1	25 x <i>U</i> <sub>s</sub>							
Power consumption of the solenoid co	oils		For cold	coil and	1.0 x <i>U</i> <sub>s</sub>						
<ul> <li>Contactors with solid-state operating</li> </ul>	Closing	W	23							76	64
mechanism	Closed	W	1							1.8	1.0
Rated data of the main contacts											
Load rating with AC			_								
Minimum cross-section in the main cir	rcuit										
<ul> <li>At maximum AC-1 rated value</li> </ul>		$mm^2$	16		25			35		50	

25

All details and technical specifications not mentioned here are identical to those of the basic units, see page 3/25 onwards.

ullet At maximum  $I_{\mathrm{th}}$  rated value

Contactors for special applications Contactors for railway applications

### SIRIUS 3RT contactors with extended operating range, 3-pole

Туре		3RT1054- .X.46- 0LA2	3RT1055- .X.46- 0LA2	3RT1056- .X.46- 0LA2	3RT1064- .X.46- 0LA2	3RT1065- .X.46- 0LA2	3RT1066- .X.46- 0LA2	3RT1075- .X.46- 0LA2	3RT1076 .X.46- 0LA2
Size		S6			S10			S12	
General data									
Ambient temperature									
During operation	°C	-40 +70							
During storage	°C	-55 +80	1						
Control									
Solenoid coil closing for DC	W	320			580			800	
Solenoid coil closed for DC	W	2.8			3.4			3.6	
Control version of the switch operating mechanism		PLC-IN or	standard A	1 - A2 (can	be set)				
Actuated via A1/A2									
Rated control supply voltage	V DC	24, 72 or 1	110						
Operating range		0.7 1.25	5						
Actuated via PLC input									
Rated voltage	V DC	24 110							
Operating range		0.7 1.25	5						
Consumed current at PLC control input according to IEC 60947-1, maximum	mA	2							
Rated data of the main contacts									
Load rating with AC		_							
Minimum cross-section in the main circuit									
At maximum AC-1 rated value	$\rm mm^2$	70	95		150	185		300	370
<ul> <li>At maximum I<sub>th</sub> rated value</li> </ul>	mm <sup>2</sup>	70	95		150	185		300	370

All details and technical specifications not mentioned here, see https://support.industry.siemens.com/cs/ww/en/ps/16177/td.

Type Size		3RT1456X.46-0LA2 S6	3RT1466X.46-0LA2 3RT1467X.46-0LA2	3RT1476X.46-0LA2 S12
General data				-
Ambient temperature				
During operation	°C	-40 +70		
During storage	°C	-55 +80		
Control				
Solenoid coil closing for DC		320	580	800
Solenoid coil closed for DC		2.8	3.4	3.6
Control version of the switch operating mechanism		PLC-IN or standard A	1 - A2 (can be set)	
Actuated via A1/A2				
Rated control supply voltage	V DC	24, 72 or 110		
Operating range		0.7 1.25		
Actuated via PLC input				
Rated voltage	V DC	24 110		
Operating range		0.7 1.25		
Consumed current at PLC control input according to IEC 60947-1, maximum	mA	2		
Rated data of the main contacts				
		_		

Load rating with AC

Minimum cross-section in the main circuit					
<ul> <li>At maximum AC-1 rated value</li> </ul>	$\text{mm}^2$	140	240	300	480
<ul> <li>At maximum I<sub>th</sub> rated value</li> </ul>	mm <sup>2</sup>	140	240		480

All details and technical specifications not mentioned here, see https://support.industry.siemens.com/cs/ww/en/ps/16177/td.

Contactors for special applications Contactors for railway applications

SIRIUS 3RT contactors with extended operating range, 3-pole IE3/IE4 ready

#### Selection and ordering data

DC operation





									3RT2012K.4. 3RT2012K.42-0L			<.42-0LA0	
Rated data a	accordin	g to IEC	60947-4	-1	Auxiliary	/ contac	ts	Rated control	Spring-loaded	$\stackrel{\circ}{\mathbb{H}}$	PU	PS*	PG
AC-3 and AC t <sub>u</sub> : 70 °C	C-3e,							supply voltage <i>U</i> <sub>s</sub>	terminals		(UNIT, SET, M)		
Operational	Rating				Ident. N	o. Vers	ion						
current $I_{e}$ up to	three-p	ohase mo	otors			Į,	L,		Article No.	Price			
400 V	230 V	400 V	500 V	690 V		}	(			per PU			
A	kW	kW	kW	kW		NO	NC	V DC					
For screw	fixing	and sna	ap-on r	nountir	ng on Th	1 35 DI	N rail						
Size S00									_				
Coupling co	ntactor	s with in	tegrate	d coil cir	cuit								
• Suppresso	r diode i	integrate	d at the	factory									
12	3	5.5	5.5	5.5	10 <sup>1)</sup>	1		24 110	3RT2017-2KB41 3RT2017-2KF41		1 1	1 unit 1 unit	41B 41B
12	3	5.5	5.5	5.5	01 <sup>1)</sup>		1	24 110	3RT2017-2KB42 3RT2017-2KF42		1 1	1 unit 1 unit	41B 41B
Varistor interpretation	egrated	at the fa	ctory										
12	3	5.5	5.5	5.5	10 <sup>1)</sup>	1		24 110	3RT2017-2LB41 3RT2017-2LF41		1 1	1 unit 1 unit	41B 41B
12	3	5.5	5.5	5.5	01 <sup>1)</sup>		1	24 110	3RT2017-2LB42 3RT2017-2LF42		1 1	1 unit 1 unit	41B 41B
With plug-o	n series	resisto	and in	tegrated	coil circ	uit							
<ul> <li>Suppresso</li> </ul>	r diode i	integrate	d at the	factory									
12	3	5.5	5.5	5.5	2)		1 <sup>3)</sup>	24 110	3RT2017-2KB42-0LA0 3RT2017-2KF42-0LA0		1 1	1 unit 1 unit	41B 41B
16	4	7.5	10	11	2)		1 <sup>3)</sup>	24 110	3RT2018-2KB42-0LA0 3RT2018-2KF42-0LA0		1 1	1 unit 1 unit	41B 41B
• Varistor into	egrated	at the fa	ctory										
12	3	5.5	5.5	5.5	2)		1 <sup>3)</sup>	24 110	3RT2017-2LB42-0LA0 3RT2017-2LF42-0LA0		1 1	1 unit 1 unit	41B 41B
16	4	7.5	10	11	2)		1 <sup>3)</sup>	24 110	3RT2018-2LB42-0LA0 3RT2018-2LF42-0LA0		1 1	1 unit 1 unit	41B 41B
43													

<sup>1)</sup> It is not possible to mount an auxiliary switch. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

Accessories and spare parts, see page 3/69 onwards.

 $<sup>^{2)}\,</sup>$  One 4-pole auxiliary switch according to EN 50005 can be mounted from -40 to 70 °C; no clearance required.

<sup>3)</sup> NC contact cannot be used because it is used for switching of the series

Contactors for special applications Contactors for railway applications

SIRIUS 3RT contactors with extended operating range, 3-pole IE3/IE4 ready

#### DC operation







3RT201.-2X.42-0LA2



3RT202.-2K.40



3RT202.-2X.40-0LA2

Rated data a IEC 60077-2 $t_u$ : 70 °C	Ŭ	7-4-1				Auxiliary	contac	ots	Rated control supply voltage $U_s$	Spring-loaded terminals	<u></u>	PU (UNIT, SET, M)	PS*	PG
Conventional thermal	Opera- tional Rating of three-phase motors		Ident. No.	Versi	on									
current $I_{th}$ up to	current $I_{\rm e}$ up to	at								Article No.	Price per PU			
690 V	400 V	230 V	400 V	500 V	690 V		\	7						
Α	A	kW	kW	kW	kW		NO	NC	V DC					

### For screw fixing and snap-on mounting on TH 35 DIN rail

#### Size S00

With into	egrated coil	circuit	(varisto	r integ	jrated i	n electr	onics at	the fa	ctory)				
18	12	3	5.5	5.5	5.5	10	1		24 34 72 125	3RT2017-2XB41-0LA2 3RT2017-2XF41-0LA2	1 1	1 unit 1 unit	41B 41B
18	12	3	5.5	5.5	5.5	01		1	24 34 72 125	3RT2017-2XB42-0LA2 3RT2017-2XF42-0LA2	1 1	1 unit 1 unit	41B 41B
18	16	4	7.5	10	11	10	1		24 34 72 125	3RT2018-2XB41-0LA2 3RT2018-2XF41-0LA2	1 1	1 unit 1 unit	41B 41B
18	16	4	7.5	10	11	01		1	24 34 72 125	3RT2018-2XB42-0LA2 3RT2018-2XF42-0LA2	1 1	1 unit 1 unit	41B 41B

### Size S0

Size St	,												
With inte	egrated coil	l circuit											
<ul> <li>Coupling</li> </ul>	ng contacto	rs with va	aristor ir	ntegrate	ed at the	e factory							
	17	4	7.5	10	11	11 <sup>1)</sup>	1	1	24 110	3RT2025-2KB40 3RT2025-2KF40	1 1	1 unit 1 unit	41B 41B
	25	5.5	11	11	11	11 <sup>1)</sup>	1	1	24 110	3RT2026-2KB40 3RT2026-2KF40	1 1	1 unit 1 unit	41B 41B
	32	7.5	15	18.5	18.5	11 <sup>1)</sup>	1	1	24 110	3RT2027-2KB40 3RT2027-2KF40	1 1	1 unit 1 unit	41B 41B
<ul> <li>Varisto</li> </ul>	r integrated	in electro	onics at	the fac	ctory								
30	17	4	7.5	10	11	11	1	1	24 110	3RT2025-2XB40-0LA2 3RT2025-2XF40-0LA2	1 1	1 unit 1 unit	41B 41B
30	25	5.5	11	11	11	11	1	1	24 110	3RT2026-2XB40-0LA2 3RT2026-2XF40-0LA2	1 1	1 unit 1 unit	41B 41B
36	32	7.5	15	18.5	18.5	11	1	1	24 110	3RT2027-2XB40-0LA2 3RT2027-2XF40-0LA2	1 1	1 unit 1 unit	41B 41B
38	38	7.5	18.5	18.5	18.5	11	1	1	24 110	3RT2028-2XB40-0LA2 3RT2028-2XF40-0LA2	1 1	1 unit 1 unit	41B 41B

 $<sup>^{1)}</sup>$  It is not possible to mount an auxiliary switch. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60  $^{\circ}\text{C}.$ 

Contactors for special applications Contactors for railway applications

SIRIUS 3RT contactors with extended operating range, 3-pole IE3/IE4 ready

DC operation





3RT203.-3X.40-0LA2 3RT204.-3X.40-0LA2

Rated data a	Ŭ					Auxiliary	contac	ots	Rated	Spring-loaded terminals	8	PU (UNIT,	PS*	PG
t <sub>□</sub> : 70 °C	AC-3 and t <sub>u</sub> : 60 °C	AC-3e							supply voltage <i>U</i> s	for auxiliary and control circuits		SET, M)		
Conventional thermal	Opera- tional	Opera- Rating of three-phase motors			Ident. No.	Versi	on							
current I <sub>th</sub> up to	current $I_{\rm e}$ up to	at								Article No.	Price per PU			
690 V	400 V	230 V	400 V	500 V	690 V		\	7						
Α	А	kW	kW	kW	kW		NO	NC	V DC					

#### For screw fixing and snap-on mounting on TH 35 DIN rail

With inte	egrated coil	circuit (	varisto	r integ	grated i	in electr	onics at	the fa	actory)				
50	40	11	18.5	22	22	11	1	1	24 110	3RT2035-3XB40-0LA2 3RT2035-3XF40-0LA2	1 1	1 unit 1 unit	41B 41B
55	50	15	22	30	22	11	1	1	24 110	3RT2036-3XB40-0LA2 3RT2036-3XF40-0LA2	1 1	1 unit 1 unit	41B 41B
60	65	18.5	30	37	37	11	1	1	24 110	3RT2037-3XB40-0LA2 3RT2037-3XF40-0LA2	1 1	1 unit 1 unit	41B 41B
75	80	22	37	37	45	11	1	1	24	3RT2038-3XB40-0LA2	1	1 unit	41B

# For screw fixing and snap-on mounting on TH 35-15 and TH 75-15 DIN rails

#### Size S3

With inte	egrated coil	circuit	(varisto	or integ	grated	in electr	onics at	the fa					
90	80	22	37	45	55	11	1	1	24 110	3RT2045-3XB40-0LA2 3RT2045-3XF40-0LA2	1 1	1 unit 1 unit	41B 41B
95	95	22	45	55	75	11	1	1	24 110	3RT2046-3XB40-0LA2 3RT2046-3XF40-0LA2	1 1	1 unit 1 unit	41B 41B
95	110	30	55	75	75	11	1	1	24 110	3RT2047-3XB40-0LA2 3RT2047-3XF40-0LA2	1 1	1 unit 1 unit	41B 41B

Contactors for special applications Contactors for railway applications

AC-3e IE3/IE4 ready SIRIUS 3RT contactors with extended operating range, 3-pole

#### DC operation

- Solid-state operating mechanism with 24 to 110 V DC control signal input
- For screw fixing
- Auxiliary and control conductors: Spring-loaded terminals

 Main conductors: Busbar connections; a connection kit with screws, spring washers and nuts is enclosed.







3RT105.-2X.46-0LA2

3RT106.-2X.46-0LA2

3RT107.-2X.46-0LA2

Size	Rated data according IEC 60077-2	to IEC 60947-4-1 AC-3 and AC-3e	Auxiliary contacts, lateral		Rated control supply voltage $U_{\rm S}$	Spring-loaded terminals		PU (UNIT, SET, M)	PS*	PG
	t <sub>u</sub> : 70 °C	t <sub>u</sub> : 60 °C								
			Version							
	current I <sub>th</sub> up to 690 V	current $I_{\rm e}$ up to 400 V	\			Article No.	Price per PU			
	А	A	NO NO	С	V DC					

#### Solid-state operating mechanism

# With control signal input 24 ... 110 V DC e. g. for control by PLC

S6	120	115	2	2	24 72 110	3RT1054-2XB46-0LA2 3RT1054-2XJ46-0LA2 3RT1054-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
	140	150	2	2	24 72 110	3RT1055-2XB46-0LA2 3RT1055-2XJ46-0LA2 3RT1055-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
	145	185	2	2	24 72 110	3RT1056-2XB46-0LA2 3RT1056-2XJ46-0LA2 3RT1056-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
S10	215	225	2	2	24 72 110	3RT1064-2XB46-0LA2 3RT1064-2XJ46-0LA2 3RT1064-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
	265	265	2	2	24 72 110	3RT1065-2XB46-0LA2 3RT1065-2XJ46-0LA2 3RT1065-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
	265	300	2	2	24 72 110	3RT1066-2XB46-0LA2 3RT1066-2XJ46-0LA2 3RT1066-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
S12	350	400	2	2	24 72 110	3RT1075-2XB46-0LA2 3RT1075-2XJ46-0LA2 3RT1075-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41E 41E 41E
	475	500	2	2	24 72 110	3RT1076-2XB46-0LA2 3RT1076-2XJ46-0LA2 3RT1076-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

Contactors for special applications Contactors for railway applications

#### SIRIUS 3RT contactors with extended operating range, 3-pole

#### DC operation

- Solid-state operating mechanism with 24 to 110 V DC control signal input
- For screw fixing
- Auxiliary and control conductors: Spring-loaded terminals

 Main conductors: Busbar connections; a connection kit with screws, spring washers and nuts is enclosed.







3RT1456-2X.46-0LA2

3RT146.-2X.46-0LA2

3RT1476-2X.46-0LA2

Size	Rated data according IEC 60077-2	to IEC 60947-4-1 AC-1 t <sub>i</sub> : 40 °C	Auxiliar contact lateral		Rated control supply voltage $U_{\rm S}$	Spring-loaded terminals	<u></u>	PU (UNIT, SET, M)	PS*	PG
	Conventional thermal current $I_{\text{th}}$ up to 690 V	u	Version L			Article No.	Price per PU			
	A	A	NO	NC	V DC					

#### Solid-state operating mechanism

# With control signal input 24 ... 110 V DC e. g. for control by PLC

#### With integrated coil circuit (varistor integrated in electronics at the factory)

S6	190	275	2	2	24 72 110	3RT1456-2XB46-0LA2 3RT1456-2XJ46-0LA2 3RT1456-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S10	330	400	2	2	24 72 110	3RT1466-2XB46-0LA2 3RT1466-2XJ46-0LA2 3RT1466-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
	330	500	2	2	24 72 110	3RT1467-2XB46-0LA2 3RT1467-2XJ46-0LA2 3RT1467-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S12	520	690	2	2	24 72 110	3RT1476-2XB46-0LA2 3RT1476-2XJ46-0LA2 3RT1476-2XF46-0LA2	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

Contactors for special applications Contactors for railway applications

SIRIUS 3RH2 contactor relays with extended operating range

#### Overview

#### Standards

IEC 60947-5-1

#### Ambient temperature

The permissible ambient temperature for operation of the contactor relays (across the full operating range of the operating mechanisms) is -40 to +70 °C.

Uninterrupted duty at temperatures > +60 °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

#### Control and auxiliary circuits

The solenoid coils of the contactor relays have an extended coil operating range from 0.7 to 1.25 x  $U_{\rm s}$  and are fitted as standard with surge suppressors. The opening delay time is consequently 2 to 5 ms longer than for standard contactors.

#### Application

For operation in installations that are subject both to considerable variations in the control voltage and to high ambient temperatures, e. g. railway applications under extreme climatic conditions, rolling mills, etc.

Also for control supply voltages with battery buffering to extend the operating time in the event of battery charge failure.

#### Operating mechanism types

Contactor relays with conventional coil

These auxiliary contactors have an extended operating range of 0.7 to 1.25 x  $U_s$ . An additional auxiliary switch is not required.

Contactor relays with series resistor

These auxiliary contactors have an extended operating range of 0.7 to 1.25 x  $U_s$ .

The DC solenoid system is modified to holding operation by means of a series resistor. This is plugged on in a prewired module.

A 4-pole auxiliary switch can be fitted additionally.

Contactor relays with solid-state operating mechanism

Thanks to the integrated electronics, these auxiliary contactors have an extended operating range of 0.7 to 1.25 x  $U_{\rm s}$ .

## Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet.

Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor relay must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the auxiliary contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

Protection against overvoltage at the control supply voltage connection

- Contactor relays with conventional coil:
   A surge suppressor (suppressor diode) is integrated.
- Contactor relays with series resistor:
   A surge suppressor (a suppressor diode or varistor as preferred) is integrated.
- Contactor relays with solid-state operating mechanism: A surge suppressor (varistor) is integrated.

#### Connection methods

The 3RH2 contactor relays are available with screw terminals.

#### Side-by-side mounting

Contactor relays with conventional coil

A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C  $\leq$  70 °C.

Contactor relays with series resistor

Side-by-side mounting is permissible at ambient temperatures up to 70  $^{\circ}\text{C}.$ 

Contactor relays with solid-state operating mechanism

Side-by-side mounting is permissible at ambient temperatures up to 70  $^{\circ}\text{C}.$ 

Contactors for special applications Contactors for railway applications

#### SIRIUS 3RH2 contactor relays with extended operating range

#### Technical specifications

More information	
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/16174/td	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16174/man
FAQs, see https://support.industry.siemens.com/cs/ww/en/ps/16174/faq	

Contactor relays		Туре	3RH212K, -2L	3RH2122-2XB40-0LA2	3RH2122-2XF40-0LA2		
General data							
Upright mounting position							
<ul><li>Contactors with series resistor</li><li>Contactors with conventional coil</li></ul>			Special version (on request) Special version (on request)				
Ambient temperature			1				
During operation		°C	-40 +70 <sup>1)</sup>				
During storage		°C	-55 +80				
Control							
Solenoid coil operating range	DC operation		0.7 1.25 x U <sub>s</sub>				
Power consumption of the solenoid co	oils		For cold coil and 1.0 x U <sub>s</sub>				
Contactors with series resistor	Closing Closed	W W	13 4	 	 		
Contactors with conventional coil	Closing Closed	W W	2.8 2.8				
Contactors with solid-state operating mechanism	Closing Closed	W W		4 0.95	4.5 0.75		

<sup>3</sup>RH21...K contactor relays without article number suffix "-0LA." are coupling contactor relays that are certified for the temperature range -25 to +60 °C. For railway applications, an additional certification approves these contactors with a minimum clearance of 10 mm for the extended temperature range from -40 to +70 °C.

All details and technical specifications not mentioned here are identical to those of the 3RH2 basic units, see page 5/5 onwards.

Contactors for special applications Contactors for railway applications

#### SIRIUS 3RH2 contactor relays with extended operating range

### Selection and ordering data

DC operation ====





	22.		

3RH2122-2K.40-0LA	١	(
-------------------	---	---

								011112122211.40		0111121222	.11.40 01/10	,
I <sub>e</sub> /AC-1	perationa 5/AC-14	l current		Contacts Ident. No.	Versi	ion	Rated control supply voltage $U_s$	Spring-loaded terminals	<u></u>	PU (UNIT, SET, M)	PS*	PG
<i>t</i> <sub>u</sub> : 70 °0 <b>230 V</b>	2 at 400 V	500 V	690 V	according to EN 50011			O <sub>S</sub>			0E1, W)		
					\\	<b>†</b>		Article No.	Price per PU			
Α	Α	Α	Α		NO	NC	V DC					
For so	rew fixi	ng and s	snap-on	mounting o	n TH	35 DIN	rail					
Size S	00											
With in	tegrated	coil circu	it									
• Supp	ressor dio	de integra	ated at the	factory								
10	3	2	1	22E	2	2 <sup>1)</sup>	24 110	3RH2122-2KB40 3RH2122-2KF40		1 1	1 unit 1 unit	41A 41A
				31E	3	1 <sup>1)</sup>	24	3RH2131-2KB40		1	1 unit	41A
				40E	4	O <sup>1)</sup>	24	3RH2140-2KB40		1	1 unit	41A
<ul><li>Varist</li></ul>	or integra	ted at the	factory									
10	3	2	1	22E	2	2 <sup>1)</sup>	24 110	3RH2122-2LB40 3RH2122-2LF40		1 1	1 unit 1 unit	41A 41A
•	•			tegrated coil	circui	t						
		_	ated at the	•		0)						
10	3	2	1	21X	2	1 <sup>2)</sup>	24 110	3RH2122-2KB40-0LA0 3RH2122-2KF40-0LA0		1 1	1 unit 1 unit	41A 41A
<ul><li>Varist</li></ul>	or integra	ted at the	factory									
10	3	2	1	21X	2	1 <sup>2)</sup>	24 110	3RH2122-2LB40-0LA0 3RH2122-2LF40-0LA0		1 1	1 unit 1 unit	41A 41A
With in	tegrated	coil circu	it (varisto	r integrated i	n elect		at the factory)					
10	3	2	1	22E	2	2 <sup>2)</sup>	24 34 72 125	3RH2122-2XB40-0LA2 3RH2122-2XF40-0LA2		1 1	1 unit 1 unit	41A 41A

<sup>1)</sup> It is not possible to mount an auxiliary switch.

Accessories, see page 3/69 onwards.

Other voltages according to page 3/67 on request.

<sup>2) 4-</sup>pole auxiliary switch according to EN 50005 can be mounted.

Contactors for special applications Contactors for railway applications

#### 3TH4 contactor relays, 8-pole

#### Overview

#### Standards

IEC 60947-5-1

Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices.

#### Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full solenoid coil operating range) is -50 to +70 °C. Uninterrupted duty at temperatures < -25 °C and > +55 °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 55 °C. There is no need to reduce the technical specifications.

#### Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e.g. in railway applications.

#### Control and auxiliary circuits

The solenoid coils of the contactor relays have an extended coil operating range from 0.7 to 1.25 x  $U_{\rm s}$  and are fitted as standard with varistors to provide protection against overvoltage. The opening delay time is consequently 2 to 5 ms longer than for standard contactors.

#### Technical specifications

More information	
	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16176/man
FAQs, see https://support.industry.siemens.com/cs/ww/en/ps/16176/faq	

Contactor relays		Туре	3TH42
General data			
Permissible ambient temperature	·		
During operation		°C	-50 +70 <sup>1)</sup>
During storage		°C	-55 +80
Control			
Solenoid coil operating range		0.7 1.25 x <i>U</i> <sub>s</sub>	
Power consumption of the solenoid For cold coil: Closing = Closed	d coils (for cold coil and $1.0 \times U_{\rm S}$ )	W	5.2
Permissible residual current of the	electronics (with 0 signal)		
DC operation			$\leq$ 10 mA x (24 V/ $U_{\rm S}$ )
Operating times within operating ra	ange		
Total break time = Opening delay time	e + Arcing time		
DC operation     Closing delay     Opening delay time		ms ms	40 200 20 30
Arcing time		ms	10 20

<sup>1)</sup> Side-by-side mounting with 10 mm clearance.

All details and technical specifications not mentioned here are identical to those of the 3TH4 basic units, see page 5/14 onwards.

Contactors for special applications Contactors for railway applications

3TH4 contactor relays, 8-pole

## Selection and ordering data

DC operation ====



RTH4244-01

Contacts		operatio 15/AC-14 400 V		ent 690 V	Contacts <sup>1)</sup> Ident. No. according to EN 50011	Version	1	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
	200 1	100 V	000 1	000 1	EIV 000 III	1	7		Article No.	Price per PU			
Number	Α	Α	Α	Α		NO	NC	V DC					
For scr	ew fixir	ng and	snap-o	n mou	nting on T	H 35 DI	N rail						
With int	tegrate	d coil c	ircuit (	varisto	r integrate	d at the	e facto	ory)					
8	10	6	4	2	44E	4	4	24 110	3TH4244-0LB4 3TH4244-0LF4		1 1	1 unit 1 unit	41A 41A
8	10	6	4	2	53E	5	3	24 110	3TH4253-0LB4 3TH4253-0LF4		1	1 unit 1 unit	41A 41A
8	10	6	4	2	62E	6	2	24 110	3TH4262-0LB4 3TH4262-0LF4		1	1 unit 1 unit	41A 41A

<sup>1)</sup> No expansion contacts can be fitted.

Other voltages according to page 5/19 on request.

Accessories, see page 5/20.

Contactors for special applications Contactors for railway applications

3TC contactors for switching DC voltage, 2-pole

#### Overview

#### Standards

IEC 60947-4-1

# Protecting connections against short circuit, overload and overvoltage

All connections must generally be protected against overload and short circuits using suitable measures. Different constraints must be considered depending on the type of connection:

#### Short-circuit and overload protection of main connections

For information on the protection of a free-standing contactor, see the technical product data sheet.

For more information on complete units such as contactors with overload relays or contactors with motor starter protectors as the motor feeder, see Configuration Manual for load feeders.

#### Short-circuit and overload protection of auxiliary connections

For information on the protection of auxiliary contacts, see the technical product data sheet.

# Short-circuit and overload protection of control supply voltage connections or supply voltage connections

First of all, the relevant standards and regulations for configuring control panels and the parts and components installed in them must be taken into account, for example for cable dimensioning.

One possible protection for these circuits could be the selection of a suitable power supply, i.e. one with a current-limiting function. In the selection of the source and the connecting cable, the load characteristics of the contactor must be considered (short-time inrush current peaks for solid-state operating mechanisms, switch-on power, holding power).

If there are further switching elements in the circuit, such as the auxiliary contact system of an overload relay that operates the contactor, the short-circuit protection necessary for this must also be considered.

For further recommendations, e.g. the use of miniature circuit breakers or circuit breakers for equipment in control circuits, see Control panel tip – Selecting and dimensioning suitable power supplies quickly and reliably.

# <u>Protection against overvoltage at the control supply voltage connection</u>

The 3TC contactors for railway applications are fitted as standard with varistors against overvoltage.

#### Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full solenoid coil operating range) is -50 to +70 °C. Uninterrupted duty at temperatures < -25 °C and > +55 °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

A clearance of 10 mm is required for side-by-side mounting of size 2 contactors at ambient temperatures > 55 °C. There is no need to reduce the technical specifications.

#### Series resistor

The DC solenoid systems of the 3TC contactors must be modified (to holding coil) by means of a series resistor. This series resistor is supplied separately packed with the contactors.

With types 3TC48, the series resistor must be attached onto the right-hand side of the auxiliary switch by means of the enclosed mounting parts and sets of links provided, while in the case of the 3TC44 it must be mounted and wired between the contactor poles. With types 3TC52 and 3TC56, the series resistor must be attached separately next to the contactors.

## Fitting auxiliary contacts and mounting additional auxiliary switches

#### Features in the delivery state

The 3TC contactors are equipped with two lateral auxiliary switches with four auxiliary contacts. Of those contacts, one NC contact is required if a series resistor is used (2 NO + 1 NC).

#### Expansion possibilities

Contactors with AC operation can be expanded using auxiliary switches; the permissible configuration must be observed.

#### Reversing contactors

With the 3TC52 and 3TC56 contactors, the series resistor must be connected using an additional K2 reversing contactor. This contactor is automatically included in the scope of supply.

#### Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e.g. in railway applications.

#### Control and auxiliary circuits

The solenoid coils of the contactors have an extended coil operating range from 0.7 to  $1.25 \times U_{\rm s}$ .

#### Technical specifications

More information									
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/16180/td	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16180/man								
Туре		3TC44	3TC48	3TC52	3TC56				
Size		2	4	8	12				
General data									
Ambient temperature									
During operation	°C	-40 +70							
Control									
Solenoid coil operating range		0.7 1.25 x U <sub>s</sub>							
Power consumption of the solenoid coils		For cold coil a	and 1.0 x <i>U</i> s						
Closing	W	48	26	40	130				
• Closed	W	13	14	21	59				

All details and technical specifications not mentioned here are identical to those of the basic units of the 3TC contactors,

see page 4/71.

Contactors for special applications Contactors for railway applications

**3TC contactors for switching DC voltage, 2-pole** 

#### Selection and ordering data

#### DC operation

3TC44: For screw fixing and snap-on mounting on 35 mm DIN rail 3TC48 to 3TC56: For screw fixing





2TC40

3TC56 with reversing contactor

Size	Utilization category	Rated operational current $I_e$ at	of loa	d power			Auxilia contac Versio	cts <sup>1)</sup>	Rated control supply voltage <i>U</i> <sub>s</sub>	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
		750 V	220 V	′ 440 V	′ 600 V	′ 750 V	Y	7		Article No.	Price per PU			
		А	kW	kW	kW	kW	NO	NC	V DC					
Cont	tactors for	switching	DC v	oltage										
With	integrated	coil circu	it (var	ristor i	integra	ated a	t the f	actory)		ı				
2	DC-1 DC-3/DC-5	32 7.5	7 5	14 9	19.2 9	24 4	2	1 <sup>2)</sup>	24 110	3TC4417-0LB4 3TC4417-0LF4		1 1	1 unit 1 unit	41B 41B
	laterally m tional auxil								lly in					
4	DC-1 DC-3/DC-5	75 75	16.5 13	33 27	45 38	56 45	2	1 <sup>2)</sup>	24 110	3TC4817-0LB4 3TC4817-0LF4		1 1	1 unit 1 unit	41B 41B
8	DC-1 DC-3/DC-5	170 170	48 41	97 82	132 110	165 110	2	1 <sup>2)</sup>	24 110	3TC5217-0LB4 3TC5217-0LF4		1 1	1 unit 1 unit	41B 41B
12	DC-1 DC-3/DC-5	400 400	88 70	176 140	240 200	300 250	2	1 <sup>2)</sup>	24 110	3TC5617-0LB4 3TC5617-0LF4		1 1	1 unit 1 unit	41B 41B
1)									<b>.</b> .					

<sup>1)</sup> No expansion auxiliary contacts can be fitted.

Other rated control supply voltages according to page 4/78 on request.

#### Accessories

Accessories, see basic units of the 3TC contactors, page 4/78 onwards.

#### Spare parts for contactors with extended operating range

For contactors	S	Remarks	Rated control supply voltage $U_{\rm s}$	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Туре		V DC					
Arc chutes								
2	3TC4417-0L	With recess for resistor mounting		3TY2442-0B		1	1 unit	41B
Solenoid co	oils							
2	3TC44	With series resistor, without varistor	24 110	3TY6443-0LB4 3TY6443-0LF4		1 1	1 unit 1 unit	41B 41B
4	3TC48		24 110	3TY6483-0LB4 3TY6483-0LF4		1 1	1 unit 1 unit	41B 41B

All spare parts not mentioned here are identical to those of the basic units of the 3TC contactors, see page 4/78.

<sup>&</sup>lt;sup>2)</sup> One NC contact used for series resistor.

3TC contactors for switching DC voltage, 1- and 2-pole

#### Overview

#### 3TC4 and 3TC5

IEC 60947-1, IEC 60947-4-1, IEC 60947-5-1 (auxiliary switches)

The DC motor ratings given in the tables are applicable to the DC-3 and DC-5 utilization categories with 2-pole switching of the load or with the two conducting paths of the contactor connected in series.

One contactor conducting path can switch full power up to 220 V. For voltages over 220 V, the two conducting paths are to be switched in series, see Rated data of the main contacts, page 4/73.

#### Surge suppression

Contactors (not for railway applications) supplied without a coil circuit can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of diode and Zener diode for short break times) for damping switching overvoltages in the coil, see page 4/79 onwards.

Fitting auxiliary contacts and mounting additional auxiliary switches

- Features in the delivery state:
   The 3TC contactors are equipped with two lateral auxiliary switches with four auxiliary contacts. Of those contacts, one NC contact is required if a series resistor is used (2 NO + 1 NC).
- Expansion possibilities: Contactors with AC operation can be expanded using auxiliary switches; the permissible configuration must be observed.

#### **3TC7**

IEC 60947-4-1

The contactors are suitable for switching and controlling DC motors as well as all other DC loads.

The solenoid excitation is configured for a particularly large operating range. It is between 0.7 or 0.8 and  $1.2 \times U_{\rm g}$ .

3TC74 contactors can be used at up to 750 V/400 A and 50 Hz in AC-1 operation. For voltages over 750 V, the two conducting paths (3TC74: two contactors) are to be switched in series, see Rated data of the main contacts, page 4/75.

#### Application

The contactors are suitable for switching and controlling DC motors as well as all other DC circuits.

A version with a particularly large solenoid coil operating range is available for operation in electrically driven vehicles and in switchgear subject to large fluctuations in actuating voltage (see page 4/69).

3TC contactors for switching DC voltage, 1- and 2-pole

## Technical specifications

More information								
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/16181/td	Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/16181/man							
FAQs, see https://support.industry.siemens.com/cs/ww/en/ps/16181/faq								

Туре	'		3TC4 and 3TC7	3TC5
Rated data of the auxiliary contacts				
Rated insulation voltage <i>U</i> <sub>i</sub> (pollution degree 3)		V	690	
Conventional thermal current $I_{th}$ = rated operational current $I_e$ /AC-12		А	10	10
AC load				
Rated operational current I <sub>e</sub> /AC-15/AC-14				
$ullet$ At rated operational voltage $U_{\mathrm{e}}$		A A A A A	10 10 10 6 5.6	10 10 10 6 5.6
	400 V 500 V 660 V	A A A	3.6 2.5 2.5 	3.6 2.5 2.5 
DC load				
Rated operational current I <sub>e</sub> /DC-12				
$ullet$ At rated operational voltage $U_{ m e}$	125 V 220 V 440 V	A A A A A A	10 10 3.2 2.5 0.9 0.33 0.22	10 10 8 6 2 0.6 0.4
Rated operational current I <sub>e</sub> /DC-13				
$ullet$ At rated operational voltage $U_{ m e}$	48 V	A A A A	10 5 1.14 0.98 0.48	10 5 2.4 2.1 1.1
	440 V	A A	0.13 0.07	0.32 0.21

Туре	3TC44 to 3TC56
® and ® rated data of the auxiliary contacts	
Rated voltage, max.	600
Switching capacity	A 600, P 600

3TC contactors for switching DC voltage, 1- and 2-pole

Туре		3TC44 to 3TC78				
Contact endurance of the main contacts						
10 <sup>7</sup> 8 6 9 4 90 2 3TC44 3TC48 3TC52 3TC56 90 4 90 5 6 6 90 4 90 6 4 90 7 6 6 90 8 6 90 9 4 90 9 8 6 90 9 8 6 90 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	00655		20 Mill.  N 18  N	50 200 250 300 8 contactors	NSB0_00656	
		07044	07040	0.7.0.5.0	OTOF C	
Contactor Type Size		3TC44 2	3TC48 4	3TC52 8	3TC56 12	
General data			7	U	12	
	mm mm	70 x 85 x 141 70 x 85 x 100	100 x 183 x 180 100 x 183 x 154	135 x 238 x 232 135 x 238 x 200		
Permissible mounting position  The contactors are designed for operation on a vertical mounting surface.		22,5° +22,5° 22,5° 22,5° 36 36 36 36 36 36 36 36 36 36 36 36 36				
Mechanical endurance Operating cycles		10 million				
Electrical endurance		See the endurance diagram above				
Rated insulation voltage <i>U</i> <sub>i</sub> (pollution degree 3)	V	800		1 000		
	kV	8				
<b>Protective separation</b> between the coil and the main contacts according to IEC 60947-1, Annex N	V	Up to 300		Up to 660		
Mirror contacts <sup>1)</sup> A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.		Yes, according to IEC 60947-4-1, Annex F				
Permissible ambient temperature						
During operation	°C	-25 +55				
3 3	°C	-50 +80				
Short-circuit protection						
Main circuit						
<ul><li>Type of coordination "1"</li><li>Type of coordination "2"</li></ul>		2 x 3NA3020 (50 A) in series 2 x 3NA3020 (50 A) in series	2 x 3NA31 (160 A) in series 2 x 3NA31 (63 A) in series	3NE1332-4D (400 A) 3NE1332-4D (400 A)	2 x 3NE1330-4D (315 A) parallel 2 x 3NE1330-4D (315 A) parallel	
Auxiliary circuit		,				
(short-circuit current $I_k \le 1$ kA) • Fuse links, operational class gG:	А	16				
DIAZED, type 5SB; NEOZED, type 5SE  • Miniature circuit breaker with C characteristic	A	10				
<ol> <li>Miniature circuit breaker with C characteristic</li> <li>For 3TC44, one NC contact each must be connected in series for the right and left auxiliary switch respectively.</li> </ol>		ed data of the	auxiliary contac	cts, see page 4	/71.	

3TC contactors for switching DC voltage, 1- and 2-pole

Туре			3TC44	3TC48	3TC52	3TC56
Size			2	4	8	12
Control						
Solenoid coil operating range						
DC operation			0.7 1.25 x <i>U</i> <sub>s</sub>			
AC operation			0.8 1.1 x U <sub>s</sub>			
Power consumption of the solenoid coils (for cold coil and $1.0 \times U_{\rm S}$ )						
DC operation	Closing = Closed	W	10	19	30	86
AC operation, 50 Hz coil	Closing Closed	VA/p.f. $\varphi$ VA/p.f. $\varphi$	68/0.86 10/0.29	300/0.5 26/0.24	640/0.48 46/0.23	1 780/0.3 121/0.22
AC operation, 60 Hz coil	Closing Closed	VA/p.f. φ VA/p.f. φ	95/0.79 12/0.3	365/0.45 35/0.26	730/0.38 56/0.24	2 140/0.3 140/0.29
• AC operation, 50/60 Hz coil	Closing	VA/p.f. φ	79/73/0.83/0.78			
	at 50/60 Hz Closed at 50/60 Hz	VA/p.f. φ	11/9/0.28/0.27			
Rated data of the main contacts	a. 55/50 FIZ					
Load rating with DC			•			
Utilization category DC-1 ( <i>L/R</i> ≤ 1 ms)						
• Rated operational currents $I_e$ (at 55 °C)	Up to $U_{\mathrm{e}}$ 750 V	Α	32	75	220	400
Minimum conductor cross-section		$\text{mm}^2$	6	25	95	240
Rated power at U <sub>e</sub>	At 220 V	kW	7	16.5	48	88
(≤ 220 V DC: one conducting path, > 220 V DC: two conducting paths in series)	440 V 600 V 750 V	kW kW kW	14 19.2 24	33 45 56	97 132 165	176 240 300
Utilization category DC-3 and DC-5, shunt-wound and series-wound motors ( <i>L/R</i>				50	100	000
• Rated operational currents $I_{\rm e}$	Up to 220 V	Α	32	75	220	400
(at 55 °C)	440 V	A	29	75 75	220	400
	600 V 750 V	A A	21 7.5	75 75	220 170	400 400
• Rated power at <i>U</i> <sub>e</sub>	At 110 V	kW	2.5	6.5	20	35
(≤ 220 V DC: one conducting path,	220 V	kW	5	13	41	70
> 220 V DC: two conducting paths in series)	440 V 600 V	kW kW	9	27 38	82 110	140 200
	750 V	kW	4	45	110	250
Conductor cross-sections						
Main conductors (1 or 2 conductors can be connected)			Screw term	ninals		
• Solid		$mm^2$	2 x (2.5 10)	2 x (6 16)		
<ul> <li>Finely stranded with end sleeve</li> </ul>		$\text{mm}^2$	2 x (1.5 4)			
Stranded with cable lug		mm <sup>2</sup>	2 x 16	2 x 35	2 x 120	2 x 150
<ul> <li>Pin cable lug according to DIN 46231</li> </ul>		mm <sup>2</sup>	2 x (1 6)			
Busbars		mm		15 x 2.5	25 x 4	2 x (25 x 3)
Terminal screw			M5	M6	M10	
Auxiliary conductors						
(1 or 2 conductors can be connected)  • Solid		mm <sup>2</sup>	2 × (1 2.5)			
<ul> <li>Solid</li> <li>Finely stranded with end sleeve</li> </ul>		mm <sup>-</sup> mm <sup>2</sup>	2 x (1 2.5) 2 x (0.75 1.5)			
- i mely stranded with end sieeve		111111	2 x (0.75 1.5)			

Rated data of the auxiliary contacts, see page 4/71.

## 3TC contactors for switching DC voltage, 1- and 2-pole

Туре			3TC74	3TC78
Design			1-pole contactors	2-pole contactors
General data			1 polo dell'actore	z polo contactoro
Dimensions (W x H x D)	T W O	mm	78 x 352 x 276	160 x 366 x 290
Permissible mounting position			22,5°, 22,5° 22,5°, 22,5° §	
The contactors are designed for operation on a vertical mounting surface.	al		NSN 9900	
Mechanical endurance		Oper- ating cycles	30 million	
Electrical endurance			See page 4/72	
Rated insulation voltage <i>U</i> <sub>i</sub> (pollution degree 3)		V	1 500	
Rated impulse withstand voltage $U_{imp}$		kV	8	
<b>Protective separation</b> between the coil and the main according to IEC 60947-1, Annex N	contacts	V	630	
Mirror contacts <sup>1)</sup> A mirror contact is an auxiliary NC contact that canno be closed simultaneously with an NO main contact.	t		Yes, according to IEC 60947-4-1, A	Annex F
Permissible ambient temperature		°C	-25 +55	
Short-circuit protection				_
Main circuit				
Type of coordination "1"		Α	2 x 3NE1330-4D (315 A) parallel	2 x 3NE1330-5E (315 A) parallel
Type of coordination "2"		Α	2 x 3NE1330-4D (315 A) parallel	2 x 3NE1330-5E (315 A) parallel
Auxiliary circuit (short-circuit current $I_k \le 1$ kA)				
<ul> <li>Fuse links, operational class gG: DIAZED, type 5SB; NEOZED, type 5SE</li> </ul>		Α	16	
Miniature circuit breaker with C characteristic		Α	10	
Control				
Solenoid coil operating range				
DC operation	At $U_{\rm C}$ = 24 V		0.8 1.2 x <i>U</i> <sub>s</sub>	
	At $U_{\rm C}$ > 24 V		0.7 1.2 x <i>U</i> <sub>s</sub>	
AC operation	At $U_{\rm C}$ = 24 V		0.7 1.15 x <i>U</i> <sub>s</sub>	
	At $U_{\rm C}$ > 24 V		0.7 1.14 x <i>U</i> <sub>s</sub>	
Power consumption of the solenoid coils (for cold coil and $1.0 \times U_s$ )				
DC operation	Closing = Closed	W	46	92
• AC operation, 50 Hz	Closing = Closed	VA	80	160
		P.f. φ	0.95	

<sup>1)</sup> For 3TC78, one auxiliary NC contact each of the right and left conducting paths must be connected in series.

Rated data of the auxiliary contacts, see page 4/71.

3TC contactors for switching DC voltage, 1- and 2-pole

Type			3TC74	3TC78
Design			1-pole contactors	2-pole contactors
Rated data of the main contacts				
Load rating with DC				
Utilization category DC-1 ( <i>L/R</i> ≤ 1 ms)				
<ul> <li>Rated operational current I<sub>e</sub>/DC-1 (at 55 °C)</li> </ul>		Α	500	
Minimum conductor cross-section		$\text{mm}^2$	2 x 150	
<ul> <li>Rated power (≤ 750 V DC: one conducting path,</li> </ul>	At 220 V 440 V	kW kW	110 220	
> 750 V DC: two conducting paths in series)	600 V	kW	300	
	750 V 1 200 V	kW kW	375	600
	1 500 V	kW	_	750
Critical currents, without arc extinction	At 440 V	Α	≤ 7	
	600 V 750 V	A A	≤ 13 < 15	
	730 V ≤800 V	A	S 10	 ≤ 7
	1 200 V	Ā		≤ 13
	1 500 V	Α		≤ 15
Utilization category DC-3 and DC-5, shunt-wound and series-wound motors ( <i>L/R</i> ≤ 15 ms)				
<ul> <li>Rated operational current I<sub>e</sub> (at 55 °C)</li> </ul>		Α	400	
<ul> <li>Rated power at U<sub>e</sub></li> </ul>	At 110 V	kW	35	
(≤ 750 V DC: one conducting path, > 750 V DC: two conducting paths in series)	220 V 440 V	kW kW	70 140	
> 750 V DC. two conducting paths in series)	600 V	kW	200	
	750 V	kW	250	400
	1 200 V 1 500 V	kW kW		400 500
Permissible rated current for regenerative braking At 110 600 V		Α	400	
Conductor cross-sections				
Main conductors (1 or 2 conductors can be connected)			Screw terminals	
Stranded with cable lug		mm <sup>2</sup>	2 x 150	
Stranded with cable lug     Busbars		mm	2 x (30 x 4)	
Auxiliary conductors		111111	2 x (00 x 4)	
(1 or 2 conductors can be connected)				
• Solid		$\text{mm}^2$	1 2.5	
<ul> <li>Finely stranded with end sleeve</li> </ul>		mm <sup>2</sup>	0.75 1.5	

Rated data of the auxiliary contacts, see page 4/71.

Contactors for special applications

#### 3TC contactors for switching DC voltage, 1- and 2-pole

### Selection and ordering data

DC operation ==== or AC operation, 50 Hz





											31044		31048		
Size	$ \begin{array}{c} \text{Utilization} & \text{Opera-} \\ \text{category}^{1)} & \text{tional} & \text{DC motors} \\ & \text{current} \\ & I_{e}^{\ 2)} & \text{at} \end{array} $			Auxi cont Vers	liary acts <sup>3)</sup> ion	Rated control supply voltage $U_{\rm S}$	ipply voltage		PU (UNIT, SET, M)	PS*	PG				
		r <sub>e</sub> ·	110 V	220 V	440 V	600 \	750 V	\	7		Article No.	Price per PU			
		Α	kW	kW	kW	kW	kW	NO	NC	V					
3TC4	14 to 3TC56	3 2-pole	cont	actors	· Op	eratio	nal vo	ltag	e up t	o 750 V					
DC o	peration										_				
For s	crew fixing a	ınd snap	-on mo	ounting	g on T	H 35 D	IN rail								
2	DC-3, DC-5	32	2.5	5	9	9	4	2	2	24 DC 110 DC 220 DC	3TC4417-0AB4 3TC4417-0AF4 3TC4417-0AM4		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
For s	crew fixing														
4	DC-3, DC-5	75	6.5	13	27	38	45	2	2	24 DC 110 DC 220 DC	3TC4817-0AB4 3TC4817-0AF4 3TC4817-0AM4		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
8	DC-3, DC-5	220 <sup>4)</sup>	20	41	82	110	110	2	2	24 DC 110 DC 220 DC	3TC5217-0AB4 3TC5217-0AF4 3TC5217-0AM4		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
12	DC-3, DC-5	400	35	70	140	200	250	2	2	24 DC 110 DC 220 DC	3TC5617-0AB4 3TC5617-0AF4 3TC5617-0AM4		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
AC o	peration, 5	0 Hz													
For s	crew fixing a	ınd snap	-on mo	ounting	g on T	H 35 D	IN rail								
2	DC-3, DC-5	32	2.5	5	9	9	4	2	2	220/230 AC <sup>5)</sup> 110/110 AC	3TC4417-0BP0 3TC4417-0BF0		1 1	1 unit 1 unit	41B 41B
For s	crew fixing														
4	DC-3, DC-5	75	6.5	13	27	38	45	2	2	220/230 AC <sup>5)</sup> 110 AC	3TC4817-0BP0 3TC4817-0BF0		1 1	1 unit 1 unit	41B 41B
8	DC-3, DC-5	220 <sup>4)</sup>	20	41	82	110	110	2	2	220/230 AC <sup>5)</sup> 110 AC	3TC5217-0BP0 3TC5217-0BF0		1 1	1 unit 1 unit	41B 41B
12	DC-3, DC-5	400	35	70	140	200	250	2	2	220/230 AC <sup>5)</sup> 110 AC	3TC5617-0BP0 3TC5617-0BF0		1 1	1 unit 1 unit	41B 41B

<sup>1)</sup> Permissible load for DC-1 utilization category, see detailed technical specifications in the Reference Manual.

 
 Contactor Type
 Rated operational voltage 110 V, 220 V 3TC44
 440 V 7 A 32 A 3TC48
 7 A 75 A 3TC52

 3TC48
 75 A 170 A 400 A
 170 A 400 A
 Other rated control supply voltages according to page 4/78 on request

Accessories, see page 4/78 onwards.

Spare parts, see page 4/80.

<sup>2)</sup> The following rated operational currents are permitted for reversing duty with 3TC44 to 3TC56 contactors:

<sup>3)</sup> The fitting of auxiliary switches cannot be altered on DC-operated contactors.

<sup>&</sup>lt;sup>4)</sup> At > 600 V:  $I_{\rm e}$  = 170 A.

<sup>5)</sup> Operating range at 220 V AC: 0.85 to 1.15  $\times$   $U_{\rm S}$ ; lower operating range limit according to IEC 60947.

3TC contactors for switching DC voltage, 1- and 2-pole

#### DC operation ==== or AC operation, 50 Hz

For screw fixing





													3TC74		3TC78		
Size	Utiliza- tion cat- egory <sup>1)</sup>	Operational current $I_e$								Auriary con tac Ven sio	y n- :ts <sup>2)</sup> '-	Rated control supply voltage $U_{\rm S}$	Screw terminals	<b>+</b>	PU (UNIT, SET, M)	PS*	PG
			110 \	/ 220 V	440 V	600 V	750 V	1 200 V	1500V	\ \	7		Article No.	Price per PU			
		Α	kW	kW	kW	kW	kW	kW	kW	NO	NC	V					
3TC	3TC74 1-pole contactors · Operational voltage up to 750 V																
DC c	peration	1											_				
12	DC-3, DC-5	400	35	70	140	200	250			4	4	24 DC 110 DC	3TC7414-0EB 3TC7414-0EF		1 1	1 unit 1 unit	41B 41B
AC c	peration	n, 50 H	z														
12	DC-3, DC-5	400	35	70	140	200	250			4	4	230/220 AC <sup>3)</sup>	3TC7414-1CM		1	1 unit	41B
3TC	78 2-pole	conta	ctor	s · Op	eratio	nal v	oltage	e up to	1 500 V	V							
DC c	peration	1															
12	DC-3, DC-5	400	35	70	140	200	250	400	500	4	4	24 DC 110 DC	3TC7814-0EB 3TC7814-0EF		1 1	1 unit 1 unit	41B 41B
AC c	peration	n, 50 H	z														
12	DC-3, DC-5	400	35	70	140	200	250	400	500	4	4	230/220 AC <sup>3)</sup>	3TC7814-1CM		1	1 unit	41B

Permissible load for DC-1 utilization category, see detailed technical specifications in the Reference Manual.

<sup>2)</sup> The fitting of auxiliary switches cannot be altered on DC-operated contactors.

 $<sup>^{3)}</sup>$  Upper operating range limit at 230 V AC: 1.14 x  $U_{\rm S}.$ 

Other rated control supply voltages according to page 4/78 on request.

Spare parts, see page 4/80.

Contactors for special applications

3TC contactors for switching DC voltage, 1- and 2-pole

#### Options

# Rated control supply voltages, possible on request (change of the 10th and 11th digits of the article number)

Delivery time on request

Rated control supply voltage $U_{\rm S}$	Contactor type	3TC44	3TC48	3TC52/3TC56	3TC74/3TC78
DC operation					
24 V DC		B4	B4	B4	B
48 V DC		W4	W4		
60 V DC		E4	E4		
110 V DC		F4	F4	F4	F
125 V DC		G4	G4		
220 V DC		M4	M4	M4	M
230 V DC		P4	P4		
AC operation					
Solenoid coils for 50 Hz					
24 V AC		B0	B0		
110 V AC		F0	F0	F0	
230/220 V AC		P0 <sup>1)</sup>	P0 <sup>1)</sup>	P0 <sup>1)</sup>	M <sup>2)</sup>
240 V AC		U0	U0		
Solenoid coils for 50/60 Hz					
24 V AC		C2			
110 V AC		G2			
120 V AC		K2			
220 V AC		N2			
230 V AC		L2			

 $<sup>^{1)}</sup>$  Operating range at 220 V AC: 0.85 to 1.15  $\times$   $U_{\rm S}$  ; lower operating range limit according to IEC 60947.

#### Accessories

Accessories											
	For contactors		ors Version			witches	Screw terminals	<b>(1)</b>	PU	PS*	PG
			Auxiliary Le contacts		Left	Right			(UNIT, SET, M)		
			\	<del>}</del>			Article No.	Price per PU			
	Size	Туре	NO	NC							
Second auxil	iary swite	-									
	4	3TC48	2nd au	ıxiliary sı	witch, left		3TY6501-1K		1	1 unit	41B
			1	1	53 61  54 62						
			2nd au	ıxiliary sı	witch, right		3TY6501-1L		1	1 unit	41B
			1	1		71   83 72   84					
	8 and 12	3TC52, 3TC56	2nd au 1	ıxiliary sı 1	witch, left  53  61	-	3TY6561-1K		1	1 unit	41B
			2nd au	xiliary sv	witch, right		3TY6561-1L		1	1 unit	41B
			1	1		71  83 72  84					
Solid-state co	ompatible	auxiliai	y swite	ches							<u> </u>
			solid-s	tate circ	uits with rate	ospheres and in and operational currents 300 mA at 3 60 V					

2 and 4 3TC44, 3TC48

solid-state circuits with rated operational curre  $I_{\rm el}$ /AC-14 and DC-13 of 1 ... 300 mA at 3 ... 60 \ 2nd auxiliary switch, left or right (replacement for 3TY6561-1U, 3TY6561-1V)

1 CO contact



3TY7561-1UA00

1 unit 41B

 $<sup>^{2)}</sup>$  Upper operating range limit at 230 V AC: 1.14 x  $U_{\rm S}.$ 

3TC contactors for switching DC voltage, 1- and 2-pole

	For contactors Version		Version	Rated control supply voltage $U_{\rm S}$		Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	Type		V AC	V DC					
Surge suppressors · Varistors										
	2	3TC44 <sup>1)</sup>	Varistors <sup>2)</sup> With line spacer, for mounting on the coil terminal	24 48 48 127 127 240 240 400 400 600		3TX7402-3G 3TX7402-3H 3TX7402-3J 3TX7402-3K 3TX7402-3L		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3TX7402-3.	4	3TC48	Varistors <sup>2)</sup> For sticking onto the contactor base or for mounting separately	24 48 48 127 127 240 240 400 400 600		3TX7462-3G 3TX7462-3H 3TX7462-3J 3TX7462-3K 3TX7462-3L		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
	8 and 12	3TC52, 3TC56	Varistors For sticking onto the contactor base or for mounting separately	24 48 48 127 127 240 240 400 400 600		3TX7462-3G 3TX7462-3H 3TX7462-3J 3TX7462-3K 3TX7462-3L		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3TX7462-3.	8 and 12	3TC52, 3TC56	Varistors <sup>2)</sup> For separate screw fixing or snapping onto TH 35 DIN rail	  	24 70 70 150 150 250	3TX7522-3G 3TX7522-3H 3TX7522-3J		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
3TX7522-3.										
Surge suppressors	s · BC eler	nents								
Surge suppressors	4	3TC48	RC elements For lateral	24 48	 24 70	3TX7462-3R 3TX7522-3R		1 1	1 unit 1 unit	41B 41B
Militar			snapping onto auxiliary switch or TH 35 DIN rail	48 127  127 240	 70 150	3TX7462-3S 3TX7522-3S 3TX7462-3T		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
				 240 400	150 250 	3TX7522-3T 3TX7462-3U		1 1	1 unit 1 unit	41B 41B
	0  10	0.000	DO alamanta	400 600		3TX7462-3V		1	1 unit	41B
3TX7462-3., 3TX7522-3.	8 and 12	3TC52, 3TC56	RC elements For lateral snapping onto auxiliary switch or	24 48 48 127 127 240 240 400		3TX7522-3R 3TX7522-3S 3TX7522-3T 3TX7522-3U		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
			TH 35 DIN rail	400 600		3TX7522-3V		1	1 unit	41B
Surge suppressors										
3TX7462-3.	4 to 12	3TC48, 3TC52, 3TC56	Diode assemblies <sup>3)</sup> (Diode and Zener diode) for DC solenoid system, for sticking onto the contactor base or for mounting separately	-	24 250	3TX7462-3D		1	1 unit	41B
<ol> <li>The connection pieces slightly.</li> </ol>	e for mounti	ng the sur	ge suppressor must l	be bent	<sup>2)</sup> Includes <sup>3)</sup> Not for D	s the peak value of the a OC operation.	alternating vo	Itage on the	DC side.	
	For contact	tors	Version			Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Terminal covers	Size	Туре								
11	2		For protection agains contact with exposed connections (1 set =	d busbar	t	3TY2444-0B		1	1 unit	41B
	6		For protection agains			3TX6506-3B		1	1 unit	41B
3TX6546-3B	8 and 12	3TC56	contact with exposed connections  Can be screwed on to covers one busbar of (1 set = 6 units)	free screw ei	M10 nd;	3TX6546-3B		1	1 unit	41B

3TC contactors for switching DC voltage, 1- and 2-pole

The contactors for ownering 20 totage, I ama 2 point												
Spare parts												
	For contactors		Version	Auxiliary		Auxiliary switches Left Right		Screw terminals	<b>(1)</b>	PU (UNIT, SET, M)	PS*	PG
				Į.	Ļ,		Ü	Article No.	Price			
				1	1				per PU			
	Size	Туре		NO	NC							
Auxiliary s												
	For later 2 and 4	3TC44,	Auxiliary switch (replacement for 3TY6501-1A,	1	1	13 21	31  43	3TY6501-1AA00		1	1 unit	41B
	8 and 12	3TC52, 3TC56	3TY6501-1B) Auxiliary switch, left	1	1	14  22  13  21  7		3TY6561-1A		1	1 unit	41B
3TY6561-1A			Auxiliary switch, right	1	1	<sub>14</sub>   <sub>22</sub> 	31  43   <del>2</del>	3TY6561-1B		1	1 unit	41B
	12	3TC74	Auxiliary switches	4	4	13 21 31 43		3TY2741-2J		1	1 unit	41B
	10	07070				14 22 32 44	54 62 72 84	07/0704 00			· · ·	
	12	31078	Auxiliary switch, left	2	2	13 21 31 43		3TY2781-2C		1	1 unit	41B
			Auxiliary switch, right	2	2		53 61 71 83	3TY2781-2D		1	1 unit	41B
			Version	/ersion		Rated contro voltage $U_s$	l supply	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Surge supp	Size	Type	242			V AC/DC						
Surge supp	12	3TC7	For sticking onto contactor base	the		24 110		3TX2746-2F 3TX2746-2G		1 1	1 unit 1 unit	41B 41B
	For contact		Version					Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Solenoid c	Size	Туре						_				
Colcilola o	DC oper	ration <sup>1)</sup>										
	2 4 8 12	3TC44 3TC48 3TC52 3TC56						3TY6443-0B 3TY6483-0B 3TY6523-0B 3TY6563-0B				
	AC oper							000000000000000000000000000000000000000				
	2 4 8 12	3TC44 3TC48 3TC52 3TC56						3TY7403-0A 3TY6483-0A 3TY6523-0A 3TY6566-0A				
Contacts w	ith fixing	parts										
			reliable operation e contacts should			actors,						
3TY2520-0A	2 4 8 12	3TC44 3TC48 3TC52 3TC56	(1 set = 2 movin			ed contacts)		3TY2440-0A 3TY2480-0A 3TY2520-0A 3TY2560-0A		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
	12	3TC7	Main contacts (		auiro d	por contact-		3TY2740-0E		1	1 unit	41B
Arc chutes			For 3TC78: 2 un	ns rec	uirea	per contactor						
	2 4 8 12	3TC44 3TC48 3TC52 3TC56	Arc chutes, 2-po	ole				3TY2442-0A 3TY2482-0A 3TY2522-0A 3TY2562-0A		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
3TY2482-0A	12	3TC7	For 3TC78: 2 un	its red	quired	per contactor		3TY2742-0C		1	1 unit	41B

<sup>1)</sup> Rated control supply voltages, see page 4/78. The 10th and 11th digits of the article number must be supplemented accordingly.