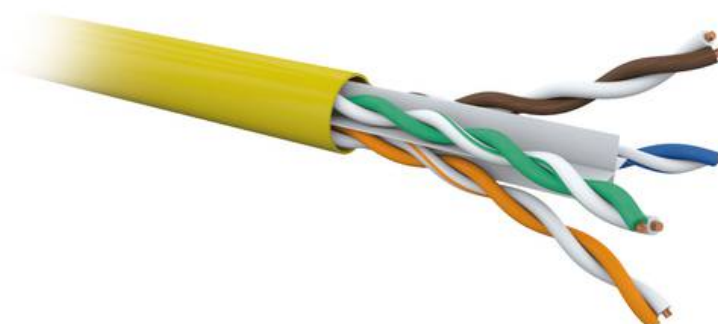


**CAT6 4P U/UTP LSOH Cca (500 m drum)****GGM C6U4PFROHT5**

The cable has been designed to exceed the ISO/IEC, TIA and CENELEC for Category 6 component requirements. This delivers Class E link performance over distances of up to 90 m which supports the applications including Gigabit Ethernet application. Each cable consists of 4 pairs AWG23 with specific designed cross filler

This cable is specially designed to meet latest product construction regulation EU 305/2011 and meet EN 50575 standard, certified Cca s1a, d1, a1.

Specifications

- Available packing: : 500 m drum
- Standards:
 - ISO/IEC 11801
 - IEC 61156-5 : Edition 2.0 2009-02,
 - EN50173 : 2007,
 - ANSI/TIA-568-C.2
- Jacket: Yellow RAL1021
- Overall diameter: 6.1 mm
- Insulation diameter: 1.4 mm
- Frequency range: from 0 to 550 MHz
- Characteristic impedance: 100 Ω
- Al-laminated plastic foil, on each pairs, drain wire
- Outer jacket : LSOH
 - IEC 60754-2
 - IEC 61034-2
- Fire rating :
 - EN 13501-6 : Cca s1a d1 a1
 - EN 50575
 - EN 50399
 - EN 60332-1-2
- Nominal velocity of propagation: 74 %
- Conductor bare copper wire, 23 AWG