




CAT6A 4P F/FTP FIRE RETARDANT AWG23 Yellow cable (500 m drum)

GGM C6AFF4PFRT5

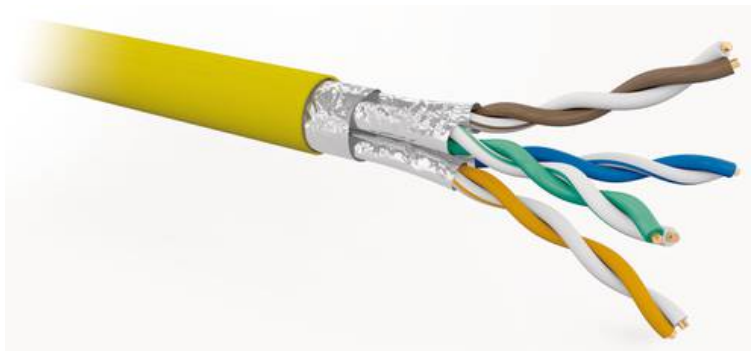

The cable has been designed to exceed the ISO/IEC, TIA and CENELEC for Category 6A/Augmented Category 6 component requirements. This delivers Class EA link performance over distances of up to 90 m which supports the applications including 10GBASE-T, 10 Gigabit Ethernet. Each cable consists of 4 pairs individually wrapped in a shield of high quality, strong, aluminium/polyester foil tape providing an individual screen for each pair. This cable is specially designed to meet IEC 60332-3-24 and EN 50266-2-4 with a Fire retardant and halogen free outer jacket.

Specifications

- Available packing: : 500 m drum
- Standards:
 - ISO/IEC 11801 Ed.2.2
 - EN 50173-1, EN 50173-2 et EN 50173-5
 - ISO/IEC 24764
 - IEC 61156-5 : Edition 2.0 2009-02,
 - ANSI/TIA-568-C.2
 - EN 50288-10-1
- Jacket: Yellow RAL1021
- Overall diameter: 7.3 mm
- Insulation diameter: 1.35 mm
- Frequency range: from 0 to 550 MHz
- Characteristic impedance: 100 Ω
- Global Al-laminated plastic foil and also on each pair, drain wire, F/FTP
- LSHF-FR (IEC 61034, IEC 67054 & IEC 60332-3)
- Nominal velocity of propagation: 79 %
- Conductor bare copper wire, AWG23