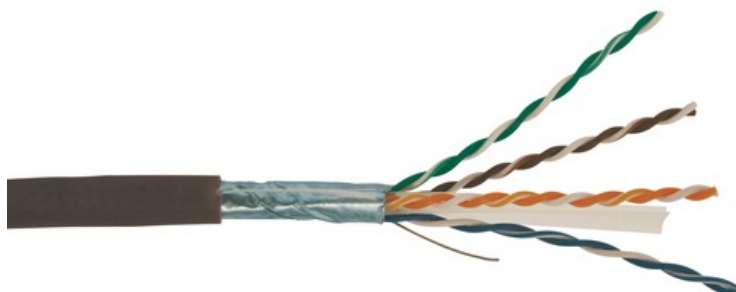


**CAT6 F/UTP PE UV resistant cable (drum 305 m)****GGM C6F4PPET3****Specifications**

- Packing : 305 m drum
- Standards:
 - EN50173,
 - ISO/IEC 11801,
 - ANSI/TIA-568-C.2
- Jacket: PE (IEC 60332-1) Black
- Shield: Polyester-backed aluminium foil, drain wire
- Outer jacket diameter: 7.4 mm
- Characteristic impedance: 100 Ω
- Nominal velocity of propagation: 66%
- Conductor bare copper wire, 24 AWG