


BUBO 2.0




EN-2021-12-29



B1G

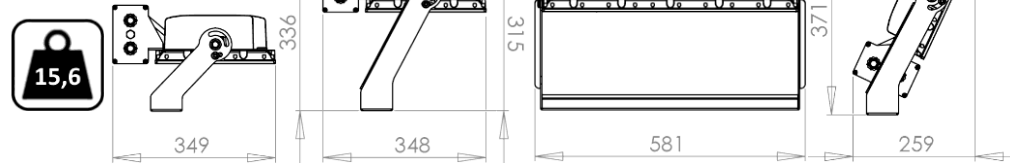

B1

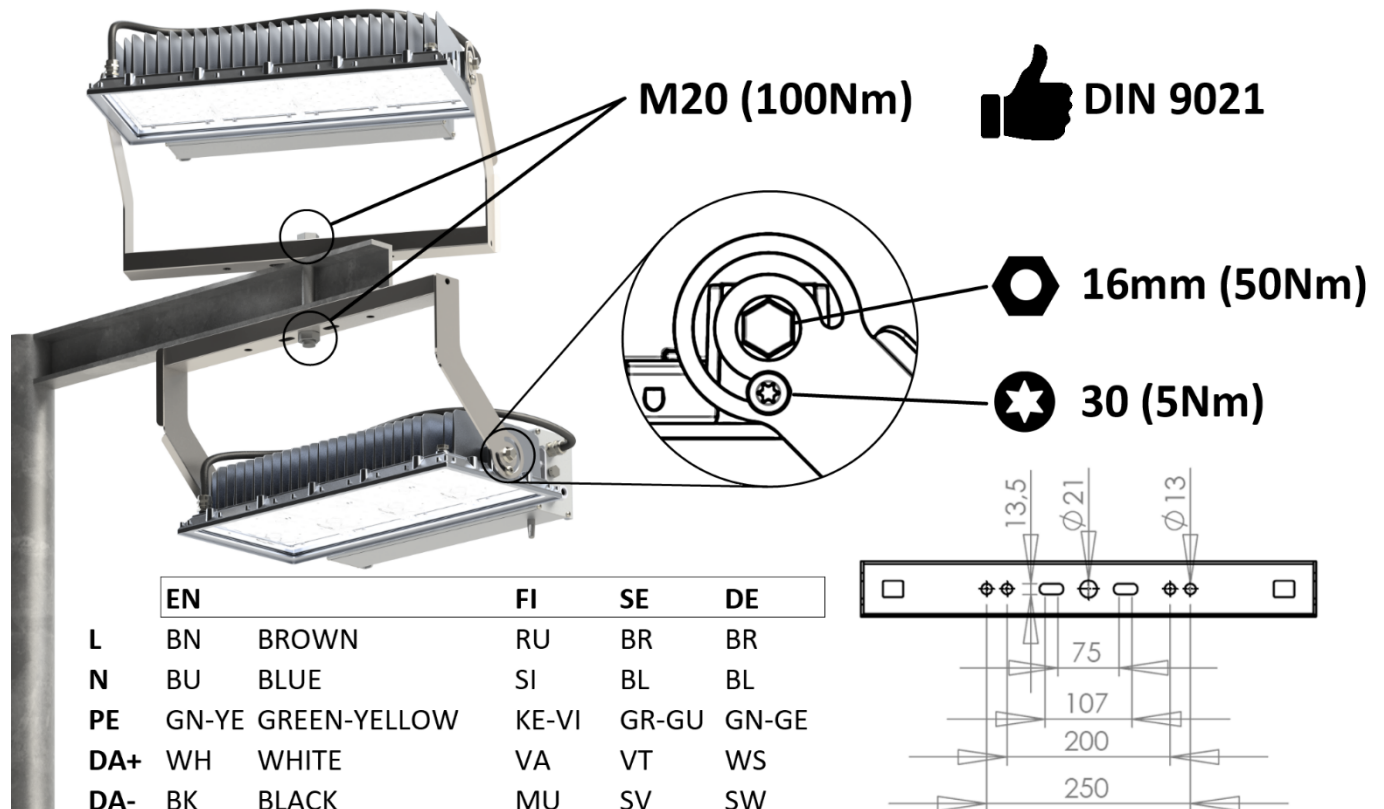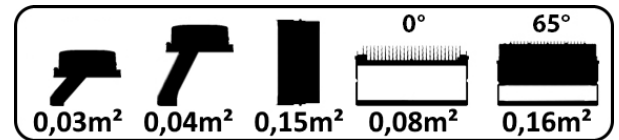

230 VAC 50/60 Hz				Type	Number of luminaires per circuit breaker BG/BGS (BGE)					
					B10 A	B16 A	C10 A	C16 A	Gg10 A	Gg16 A
Bubo B1	120-	1400	2,3 A	1a	2	4	4	6	3	5
		1200	1,9 A		3	5	4	7	3	5
		1050	1,7 A		4	6	6	9	4	7
	96-	1200	1,3 A	1b	4	6	6	11	5	8
		1050	1,4 A		4	6	6	11	5	8
		850	1,1 A		4	6	6	11	5	8

Type	Gear	Inrush current peak	Earth leakage current
Type 1a	BGS	< 4A (pulses greater than 1ms) 15A, t=170µs (10% of Ipeak)	0,6 mA
Type 1b	BGS	13A, t=1320µs (50% of Ipeak)	0,2 mA

- EN: Control circuit must be provided with cable which is insulated according to the mains voltage.
- FI: Ohjauspiirissä on käytettävä verkkojännitteen mukaan eristettyjä johtimia.
- SE: Styrkrets måste ha kabel som är isolerad enligt nätspänningen.
- DE: Der Steuerkreis muss mit einem Kabel versehen sein, die entsprechend der Netzspannung isoliert ist.

EASYLED

tel. +358 2 737 4420
Meriniitynkatu 11
FI-24100 Salo, Finland

easyled.fi
VAT number
FI20776746

MISS NOTHING.