



LED CORN LAMPS LCS23




S23-30W

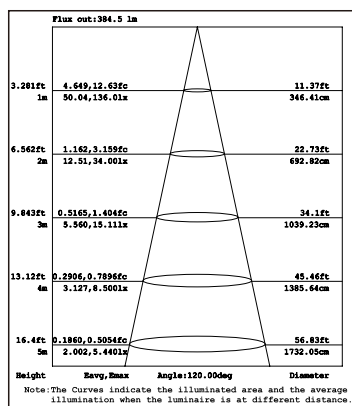

S23-40W

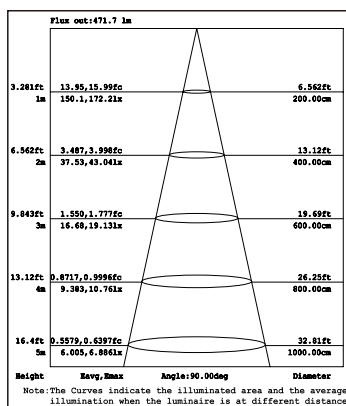

S23-50W

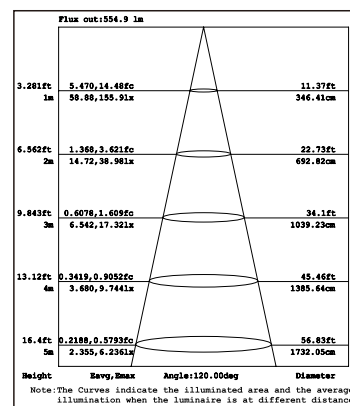

Specifications

Power	led Qty	PF	CRI	Voltage	CCT	Lumen (Clear Cover)	Lumen (Milky Cover)	Size mm (x 0.0039=inch)	Operation tep (°C/°F)	Weight (lbs=kg/2.2)	Certificate	Equal to
30W	96 leds LG5630	≥0.9	≥80	100-277VAC 50-60Hz	1900-6500K	3900±100lm	3600±100lm	E26 Φ83*240mm	minus 40~60°C	NW 0.737kg	CE ROHS UL DLC4.0 CUL Lm79 Tm21	125w HPS HQL
								E39 Φ83*257mm	minus 40~140°F	GW 0.860kg		
40W	132 leds LG5630	≥0.9	≥80	100-277VAC 50-60Hz	1900-6500K	5200±100lm	4800±100lm	E26 Φ83*240mm	minus 40~60°C	NW 0.741kg	CE ROHS UL DLC4.0 CUL Lm79 Tm21	175w HPS HQL
								E39 Φ83*257mm	minus 40~140°F	GW 0.864kg		
50W	168 leds LG5630	≥0.9	≥80	100-277VAC 50-60Hz	1900-6500K	6500±100lm	6000±100lm	E26 Φ83*240mm	minus 40~60°C	NW 0.747kg	CE ROHS UL DLC4.0 CUL Lm79 Tm21	200w HPS HQL
								E39 Φ83*257mm	minus 40~140°F	GW 0.870kg		

Features



Advantages



ODM
OEM

OEM yourself special company logo

Rubycon

Use top brand capacitors Rubycon

IP65


Ip65 design.Driver is fully sealed with thermal paste, working temperature -40°F~140°F (-40~60°C)




No Fan heat dissipation solution



No wire aluminum board design (no wires mix together), in case of circuit shortcut patent design.



Easy replacement with slide connector from lamp body to driver.



High quality driver components:
Rubycon capacitor (Japan);
FIRST MOS(USA); MPS IC Chip (USA);
Galaxy Diodes (biggest in China)



Driver with heat sink silicone for waterproof, dust proof and anti-mosquitoes



Application



Flood light



Wall pack



Post top



Ball



Acorn




Before



After




Installation

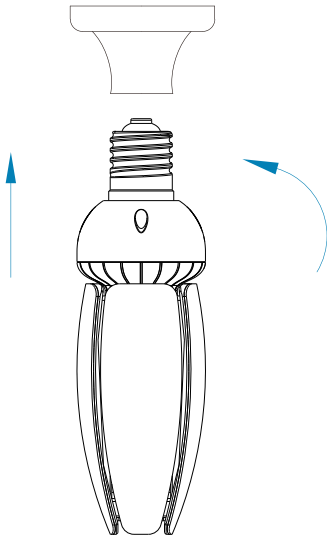


Step:1

Shown as Figure 1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner.

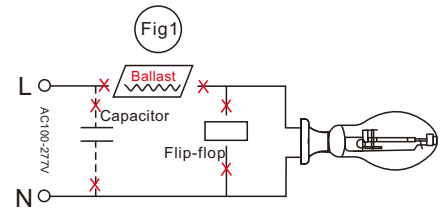


Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder.

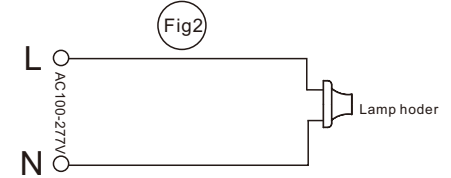


Step:3

Shown as Figure 3
Install new LED replacement lamp. Please make sure the old fitting is correctly earth.

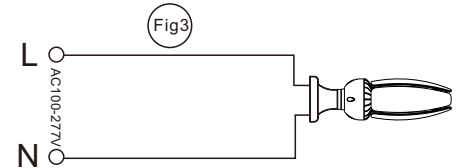

Packing

Wattage	Inner box size	N. W per lamp	G. W per box (lbs=KG x 2. 2)	G. W per Carton (lbs=KG x 2. 2)	Carton Size	Quantity Per Carton
30W	100x100x275mm	0. 737kgs	0. 860kgs	11.140kgs	415x315x290mm	12PCS
40W	100x100x275mm	0. 741kgs	0. 864kgs	11.188kgs	415x315x290mm	
50W	100x100x275mm	0. 747kgs	0. 870kgs	11.260kgs	415x315x290mm	

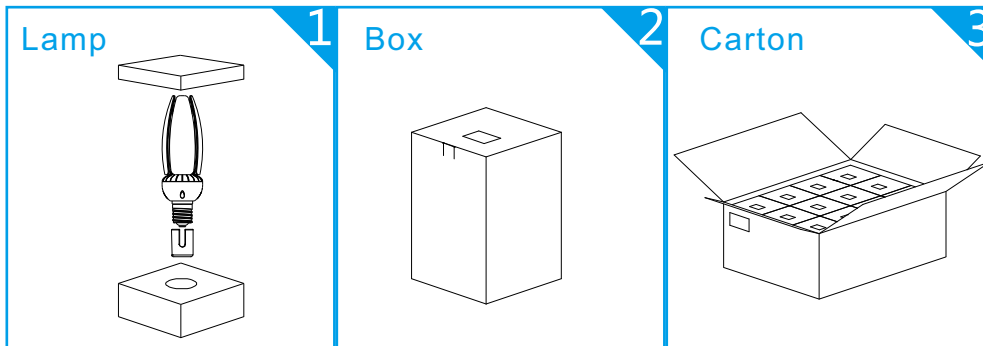

Pack Quantity:
12PCS



⚠ CAUTIONS

- Risk of electric shock. Do not use where directly exposed to water.
- Do not use with dimmers, timmers, or other control devices.
- 30w, 40w, 50w, suitable for use in totally enclosed fixtures.
- Don't take apart the lamps without our permit.
- Please read carefully manual before installation.