




Cable 4 pairs CAT6 F/UTP LSZH Dca (drum 305 m)

GGM C6F4PZHT3

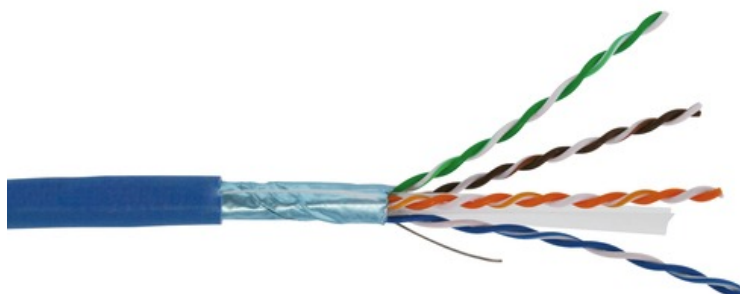

Specifications

- Packing available: 1000 m, 500 m, 305 m
- Standards:
 - ANSI/TIA-568-C.2,
 - EN 50173,
 - ISO/IEC 11801
- Applications:
 - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
 - IEEE 802.3at/af (PoE/PoE+)
- Jacket: LSZH(IEC 60332-1) Blue RAL5012
- Outer jacket diameter: 6.8 mm
- Characteristic impedance: 100 Ω
- Nominal velocity of propagation: 66 %
- Conductor bare copper wire, 24 AWG

Dual Cable also available