




## CAT6 4P U/UTP Slim LSZH AWG24 White cable (100 m box)

**GGM C6UHR4WU1**

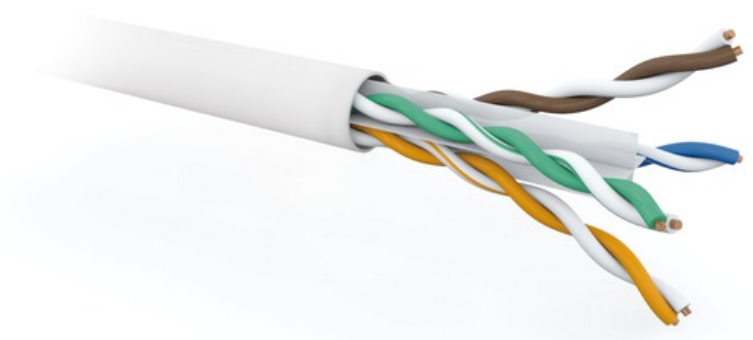

GIGAMEDIA CAT6 solution is designed to meet and exceed the performance levels described in the published cabling standards ISO/ IEC 11801, and ANSI/TIA/EIA 568C series and EN50173-1. The performance headroom provided makes it a reliable and safe choice to support all Class E applications including Gigabit Ethernet and PoE.

New Slim version available ! only **5,2mm** Outer Diameter

### Specifications

- Packing : 100 m Box
- Single and Dual construction available
- Standards:
  - ANSI/TIA-568-C.2,
  - EN 50173,
  - ISO/IEC 11801
- Applications:
  - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
  - IEEE 802.3at/af (PoE/PoE+)
- Jacket: LSZH (IEC 60332-1) White RAL9010
- Outer jacket diameter : 5,2 mm
- Characteristic impedance: 100  $\Omega$
- Nominal velocity of propagation: 67 %
- Conductor bare copper wire, 24 AWG