




## 4 fibers Drop cable I/O G657A.2 LSZH GGM FO4BG657LST

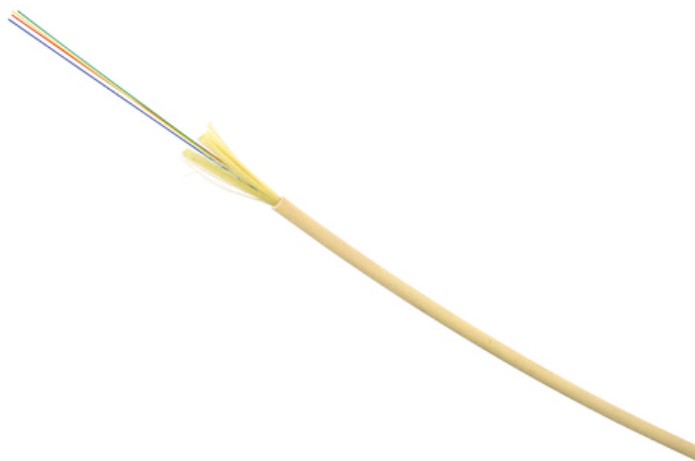

Gigamedia drop cables are very usefull when deploying FTTx drops.  
The LSZH outer sheath, combined with UV stable properties, allows Indoor or Outdoor installation.  
It can also be fasten with staplers or run onto doors frames thanks to its conception & to integrated G657A.2 fibers.

### Specifications

- 4 fibers
- 250  $\mu$ m fibers
- G657A.2 singlemode fiber (small bend radius)
- Reinforcement with aramid yarns
- LSZH and UV stabilized cable jacket
- Bending radius:
  - Short term: 12 mm
  - Permanent term: 23 mm
- Crush resistance: 500 N/dm
- Tensile strength: 500 N (during installation)
- Outer diameter : 3 mm  $\pm$  0,3
- White (RAL 1014) cable jacket
- Weight: 10 kg/km
- Temperatures:
  - Installation: + 5 °C to + 40 °C
  - Operating: - 20 °C to + 60 °C