


4 fibers Drop cable I/O G657A.2 LSZH GGM FO4BG657LST

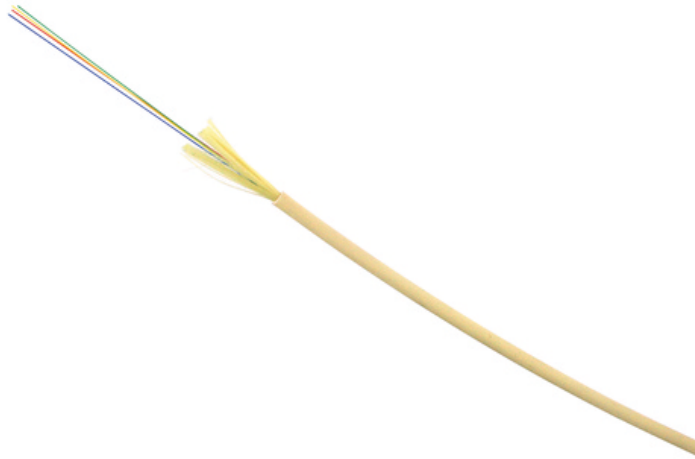

Gigamedia drop cables are intended for FTTx deployments.

Their UV stable LSZH outer jacket allows indoor and/or outdoor installation.

Thanks to their conception, and the G657A.2 fibres used, they are suitable for the most constraining installations, and can be stapled or run onto door frames.

- 4 fibres
- 250 µm fibres
- G657A.2 singlemode fibre (bend insensitive)
- Reinforced with aramid yarns
- UV stable LSZH outer jacket
- Bending radius:
 - Short term: 12 mm
 - Permanent: 23 mm
- Crush resistance: 500 N/dm
- Tensile strength: 500 N (during installation)
- Outer diameter : 3 mm ± 0,3
- White (RAL 1014) outer jacket
- Weight: 10 kg/km
- Temperature range:
 - Installation: + 5 °C to + 40 °C
 - Operating: - 20 °C to + 60 °C