




Cable 4 pairs CAT6 F/UTP LSZH Dca (100 m coil)

GGM C6F4PZHC1

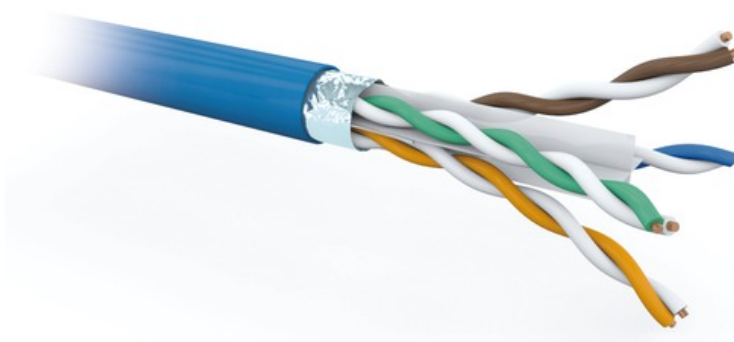

Specifications

- Packing available: 1000 m, 500 m, 305 m and 100 m
- Standards:
 - ANSI/TIA-568-C.2,
 - EN 50173,
 - ISO/IEC 11801
- Applications:
 - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
 - IEEE 802.3at/af (PoE/PoE+)
- Outer jacket : LSOH
 - IEC 60754-2
 - IEC 61034-2
- Fire rating :
 - EN 13501-6 : Dca s2 d2 a1
 - EN 50575
 - EN 50399
 - EN 60332-1-2
- Outer jacket diameter: 7.1 mm
- Characteristic impedance: 100 ?
- Nominal velocity of propagation: 70 %
- Conductor bare copper wire, 24 AWG

Dual Cable also available