UWPA, UWPM



Long-range wireless gateway: endpoint adapter and master concentrator



Benefits

- Long range communication. Up to 10 km range in open air, 1 km in typical applications.
- Low operating expenses. Wireless solution (EU 868 MHz ISM band) with no SIM card or annual fees.
- Easy and fast configuration via free software.
- Easy commissioning and diagnostics thanks to the push button for communication test.
- Security. Embedded end-to-end AES128 encryption.
- **Reliable communication** thanks to high-performance antenna, interferences/obstacles immunity and downlink server acknowledge.
- **Compatibility**. It permits to interface a Carlo Gavazzi meter and analyser with standard third-party LoRaWAN® networks or with UWP 3.0 platform.

Description

UWPA is an endpoint adapter that provides LoRa® or LoRaWAN® communication to an RS485 Carlo Gavazzi meter. UWPM is a master concentrator that permits UWP 3.0 to gather data from multiple UWPA.



Energy efficiency monitoring and energy cost allocation, sub-metering in large buildings, big facilities, farms and city areas are the best use cases for long range wireless Carlo Gavazzi systems. Thanks to LoRa®/ LoRaWAN® long communication range, security and robustness, wireless networks can be easily set-up, without high expenses due to the use of SIM cards or repeaters.


Main functions

- LoRa®/LoRaWAN® communication for a RS485 Carlo Gavazzi meter and analyser (UWPA)
- Plug'n play commissioning of a long-range wireless monitoring system based on UWP 3.0 (UWPA+UWPM)
- Integration of pulse output meters (electricity, gas and water) in combination with VMU-MC/OC.


UWPA, UWPM



Architecture (private UWP network)

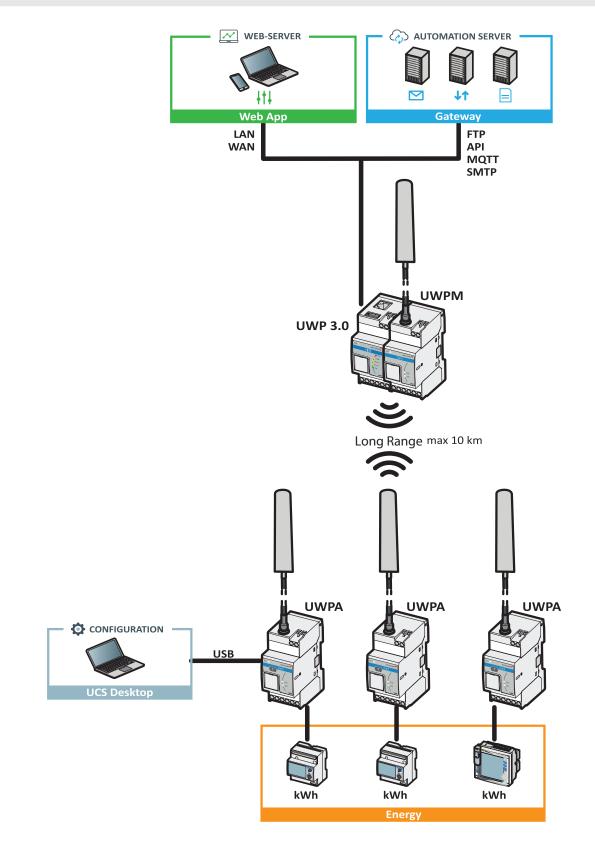



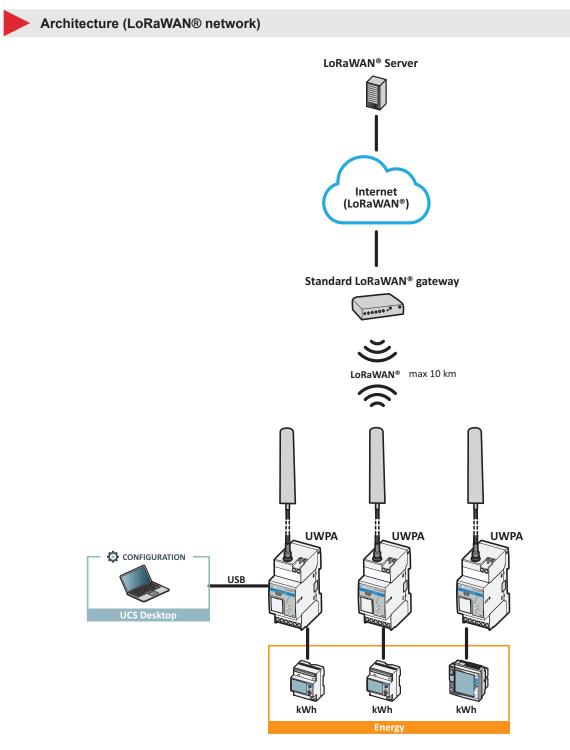


Main features

- · Compatibility with generic LoRaWAN® Gateways/Servers/Networks (UWPA)
- Full ownership of data with no need to rely on any wireless/cloud operator (UWPA+UWPM)
- EU 868 MHz ISM band communication
- Up to 50 UWPA per UWPM (max. 3 UWPM per UWP 3.0)

UWPA, UWPM



UCS (Universal configuration software) specifications

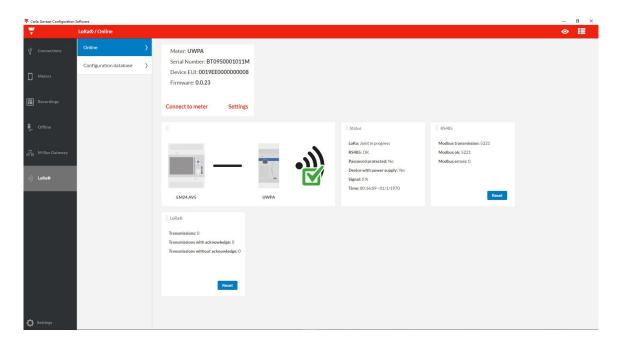

	← Edit configuration / Conf	iguration Wizard				
	Select the variables to transm	it				✓— 2 — 3
	Include timestamp					Yes
	LoRa® packets filling index				11%	
	Suggested transmission interval to min	imize data loss (ISM band constraints)				5 min
	► Energy (2)					
	► Power (0)					
	v Voltage (3)					
	VL1	Real time	Average	Maximum	Minimum	
oRa®	VL2	Real time	Average	Maximum	Minimum	
	VL3	Real time	Average	Maximum	Minimum	
	VL1-2	Real time	Average	Maximum	Minimum	
	VL2-3	Real time	Average	Maximum	Minimum	
	VL3-1	Real time	Average	Maximum	Minimum	
	V L-N sys	Real time	Average	Maximum	Minimum	
	V L-L sys	Real time	Average	Maximum	Minimum	
	Current (0)					
	▶ Other (0)					
	Cancel					Back Next

- Free software, compatible with Windows® PCs
- Intuitive user interface
- The same software for configuring UWPA and a Carlo Gavazzi meter
- UWPA password management for protecting your LoRa®/LoRaWAN® network
- · Configurations database for helping system integrators
- Real time diagnostics and datalogging
- Export of .csv or Excel files from the configured devices list for an easy integration into LoRaWAN® network
- Export of the configured devices file for the UWP network to import into UWP 3.0

UWPA, UWPM



Conformity

Directives	2014/53/EU (RED) 2011/65/EU (RoHS) 2015/865/EU (RoHS)		
Standards	Electromagnetic compatibility (EMC) - Immunity EN61000-6-2 Electromagnetic compatibility (EMC) - Emission EN61000-6-3 EN60950-1 ETSI EN 300 220-1 ETSI EN 300 220-2 EN62479		
Approvals			
Certifications	LoRaWAN Certified [™] (only UWPA)		

UWPA



Wireless endpoint gateway



Description

UWPA is a device to be connected to a Carlo Gavazzi meter via RS485. The resulting system transmits measured data either to standard third-party LoRaWAN® systems or to the UWPM concentrator using LoRa® technology.



Energy efficiency monitoring and energy cost allocation, sub-metering in large buildings, big facilities, farms and city areas are the best use cases for long range wireless Carlo Gavazzi systems. Thanks to LoRa®/ LoRaWAN® long communication range, security and robustness, wireless networks can be easily set-up, without high expenses due to the use of SIM cards or repeaters.




Main functions

- · LoRa®/LoRaWAN® communication for RS485 Carlo Gavazzi meters and analyzers
- Plug'n play commissioning of a LoRa®-based monitoring system based on UWP 3.0 (in combination with UWPM)
- · Compatibility with standard third-party LoRaWAN® Gateways/Servers/Networks
- Full ownership of data with no need to rely on any wireless/cloud operator (in combination with UWPM)
- · Local diagnostics thanks to micro-USB connection and dashboard displaying the status in UCS software
- · Communication test via push button

- Gateway from RS485 to LoRa®/LoRaWAN® for Carlo Gavazzi meters (one meter for each UWPA)
- USB port for easy set-up via UCS Software
- Universal power supply
- Configurable LoRaWAN® communication
- OTAA or ABP authentication
- Long communication range (10 km in open air, from 200 m to 3 km in typical applications)
- Communication interval from 5 min to 24 h
- Remote diagnostics via LoRa® RF technology communication
- LED indication of operating status



Structure

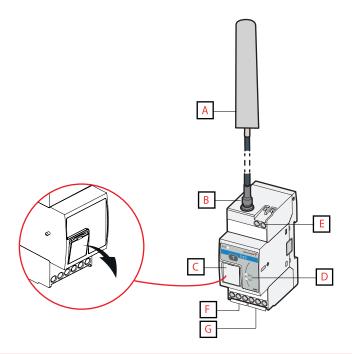

Area	Description	
Α	High-performance antenna	
В	Antenna connector	
С	USB port	
D	LEDs: Green: Power supply Yellow: RS485 Blue: LoRa®	
E	Power supply connection block	
F	Terminals for RS485 connection to meter	
G	Terminals for RS485 termination	



Special functions

- Meter auto scan via RS485
- Powered by USB for setting up without an external power supply
- Password protected configuration
- The same software (UCS) to configure both UWPA and connected device
- · Adapter firmware upgrade: user can select the firmware file and activate the firmware upgrade procedure
- Clock synchronization with server time via wireless downlink



CARLO GAVAZZI



Colour	Status LED	Description
	ON	Power supply OK
Green	OFF	No Power supply
	Fast Blinking	Hardware failure
	ON	Communication in progress without errors
Yellow	OFF	Communication disabled
Tellow	Slow blinking	Meter auto scan in progress
	Fast blinking	Not valid meters or communication error
	ON	Push button disabled to comply with ISM band restrictions on duty cycle
Blue	OFF	LoRa® RF technology communication disa- bled or network joint successfully executed (waiting for the next communication)
	Slow blinking	Communication in progress
	Fast blinking	Network joint not executed or communication failed




Features



General

Material	Noryl, self-extinguishing V-0 (UL 94)
Ducto official de ana e	Front: IP50
Protection degree	Terminals: IP20
Terminals	Cable Section: 1.5 mm ²
Terminais	Torque: from 0.4 to 0.8 Nm
Mounting	DIN rail
Dimensions	2-DIN module
Weight (packaging included)	520 g
Antenna cable length	2 m
Antenna dimensions	See picture 2

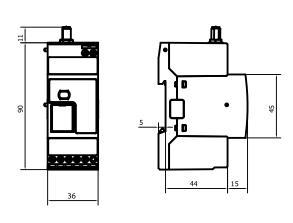



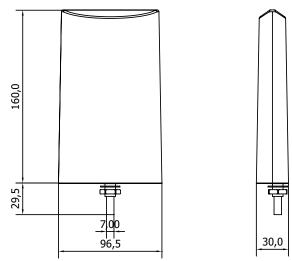


Fig. 2 High-performance antenna dimensions

Power supply

Power oupply	24 V dc +/-20%
Power supply	115-240 V ac 50/60 Hz +/-10%
Concumption	DC: 1.3 W max.
Consumption	AC: 5.5 VA max.
Connector	Screw terminals

Environmental specifications

Operating temperature	-25° to +55°
Storage temperature	-30° to +70°

NOTE: R.H. < 90% non-condensing



Input and output insulation

	Power supply	RS485	USB
Power supply	-	4 kV VRMS	4 kV VRMS
RS485	4 kV VRMS	-	0.5 kV VRMS
USB	4 kV VRMS	0.5 kV VRMS	-



Communication



RS485 port

Communication type	Multidrop, bidirectional (static and dynamic variables)
Connection type	Screw terminals
Connection type	3 wires
Protocol	Modbus RTU
Data	All
Data format 1 start bit, 8 data bits, Parity (None/ Odd/ Even), 1 or 2 stop bit	
Modbus address (from 1 to 247)	
Configuration param-	Baud rate: 4.8 / 9.6 / 19.2 / 38.4 / 57.6 / 115.2 kbps
eters	Parity (None/ Odd/ Even)
	Stop bit (1 or 2)
Maximum number of	1 meter x 1 UWPA
connected devices	




TypeUSB2.0/USB3.0Connection typeScrew terminals
3 wiresProtocolJBUS/Modbus compatibleConfiguration parametersModbus address (from 1 to 247)
Baud rate: 4.8 / 9.6 / 19.2 / 38.4 / 57.6 / 115.2 kbps
Parity (None/ Odd/ Even)
Stop bit (1 or 2)

LoRa® and LoRaWAN®

Protocol LoRa® (private UWP network, in combination with UWPM) or LoRaWAN® (LoRa network)	
Configuration param- eters	Transmission interval Authentication type (ABP or OTAA) Appkey or Appskey and Nwkskey
Frequency	EU 868 MHz ISM band
Encryption Embedded end-to-end AES128 encryption	
Transmission interval	Configurable from 5 min to 24 h
Antenna	Included high performance antenna (SMA connector, cable length 2m)
Test function Push button command for diagnostic or commissioning purposes	



Connection Diagrams

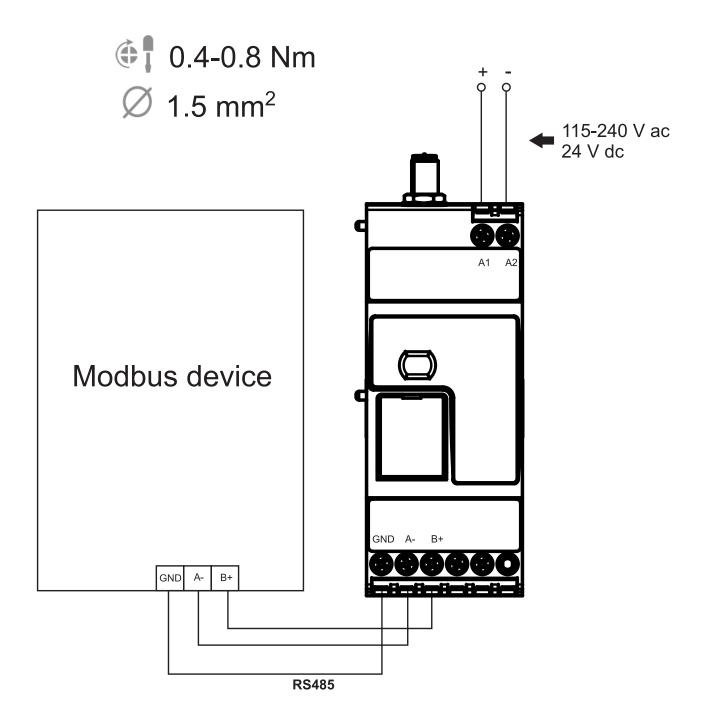



References

Further reading

Document	Where to find it
White paper	www.productselection.net/Pdf/UK/UWP-A-M-Whitepaper.pdf
Instruction manual	www.productselection.net/MANUALS/UK/UWPA_im.pdf


CARLO GAVAZZI compatible components

Purpose	Component name/code key	Notes	
Energy analyzers	EM24 (family), EM210 (family)	See relevant datasheet	
Energy meters	EM100-300 (family)	See relevant datasheet	
Power quality analyzers	WM20-30-40 (family), CPA (family)	See relevant datasheet	
Power transducers	ET100-300 (family)	See relevant datasheet	
Pulse concentrator	VMU-MC / OC	See relevant datasheet	
Power analyzer	WM15	See relevant datasheet	

UWPM



Master concentrator gateway

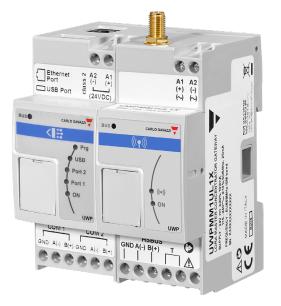

Description

UWPM is a master concentrator that permits UWP 3.0 to gather data from multiple UWPA. This allows setting-up and operating a secure and robust wireless data network in the ISM band.



Applications

Energy efficiency monitoring and energy cost allocation, sub-metering in large buildings, big facilities, farms and city areas are the best use cases for LoRa®-based Carlo Gavazzi systems. Thanks to LoRa® long communication range, security and robustness, wireless networks can be easily set-up, without any expenses due to the use of SIM cards or repeaters.



Main functions

- Plug'n play commissioning of a wireless monitoring system based on UWP 3.0 (in combination with UWPA)
- Full ownership of data with no need to rely on any wireless/cloud operator (in combination with UWPA)




- Wireless solution with no SIM card (ISM band)
- Data concentrator for up to 50 UWPA endpoints
- Long communication range (up to 10 km in open air)
- Fast commissioning
- Robust and secure communication
- Compatible with Carlo Gavazzi UWP 3.0 platform
- High-performance antenna



CARLO GAVAZZI

Structure

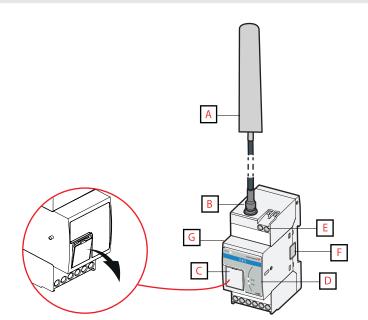

Area	Description
Α	High-performance antenna
В	Antenna connector
С	USB port
	LEDs:
D	Green: Power supply
	Yellow: HSBus
	Blue: LoRa®
E	Power supply connection block
F	Right-side female HSBus connector for additional modules
G	Left-side male HSBus connector for UWP 3.0

Special functions

- Fully integrated with UWP 3.0 platform
- Data gathered by UWPM can be logged, displayed, transmitted to other systems thanks to UWP 3.0 powerful capabilities

LED indication

Colour	Status LED	Description	
	ON	Power supply OK	
Green	OFF	No Power supply	
	Fast Blinking	Hardware failure	
	ON	HSBus communication in progress without	
Velleur		errors	
Yellow	OFF	HSBus communication error	
	Fast blinking		
	Slow blinking	Receiving message	
Blue	Fast blinking	The message is not valid or has been sent by a UWPA not included into the configuration	



Features



General

Material	Noryl, self-extinguishing V-0 (UL 94)
Protection degree	Front: IP50 Terminals: IP20
Terminals	Cable Section: 1.5 mm ² Torque: from 0.4 to 0.8 Nm
Mounting	DIN rail
Dimensions	2-DIN module
Weight (packaging included)	520 g
Antenna cable length	2 m
Antenna dimensions	See picture 2

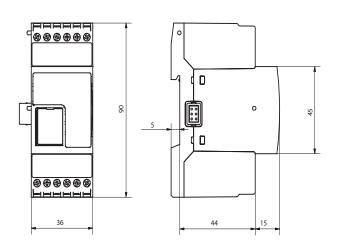


Fig. 3 UWPM dimensions

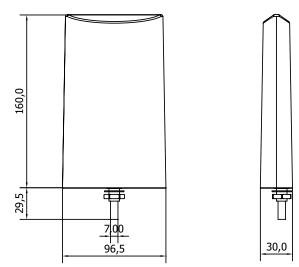


Fig. 4 High-performance antenna dimensions

Power supply

Power oupply	24 V dc +/-20%
Power supply	115-240 V ac 50/60 Hz +/-10%
Concumption	DC: 1.3 W max.
Consumption	AC: 5.5 VA max.
Connector	Screw terminals

Environmental specifications

Operating temperature	-25° to +55°
Storage temperature	-30° to +70°

NOTE: R.H. < 90% non-condensing



Communication

Long-range wireless

Protocol	LoRa® (private UWP network, in combination with UWPA)
Configuration param- eters	Managed UWPA devices and variables by means of UCS file import
Frequency	EU 868 MHz ISM band
Encryption	Embedded end-to-end AES128 encryption
Antenna	Included high performance antenna (SMA connector, cable length 2m)
Diagnostics	Signal strength UWPA status
UWPA number	Maximum: 50 UWPA per UWPM. The number may change according to the transmission interval and the interferences.



Bus type	RS485 high speed bus
Protocol	Internal proprietary protocol
Number of slaves	Max. 3 per UWP 3.0
Connection type	By local bus (left and right connectors) or terminals GND, A(-), B(+) T1, T2: terminalization inputs



UWPA per UWPM and transmission parameters

1 package (max. 8 variables*)

		UCS parameters		
Transmission interval	Maximum number of UWPA per UWPM	Spreading factor	Retry	
5 min	10	SF11	1	
10 min	10	SF12	1	
10 min	50	SF11	2	
15 min	50	SF12	2	

2 packages (max. 16 variables*)

		UCS parameters		
Transmission interval	Maximum number of UWPA per UWPM	Spreading factor	Retry	
10	10	SF11	1	
15	10	SF12	1	
20 min	10	SF12	1	
30 min	50	SF11	2	
1 h	50	SF12	2	

3 packages (max. 24 variables*)

		UCS parameters		
Transmission interval	Maximum number of UWPA per UWPM	Spreading factor	Retry	
15 min	10	SF11	1	
30 min	10	SF12	1	
1 h	50	SF12	2	

*The maximum number of variables for each package depends on their format. The indicated value refers to the real time variables (such as voltage, current, power); with hour counter variables (such as energy) that value has to be halved.

Note: The SF11 spreading factor, unlike the SF12, reduces the distance and the resilience to interferences of the signal. This reduction is more evident with spreading factors inferior to SF11.




Frequencies

Name	Туре	Channel (MHz)	Bandwidth (MHz)	Band	Band duty cycle (%)
FA	Base	868.100	125	M-B1	1
FB	Base	868.300	125	M-B1	1
FC	Base	868.500	125	M-B1	1
F1	Custom	869.900	125	R-B4	1
F2	Custom	867.100	125	L-B0	1
F3	Custom	867.300	125	L-B0	1
F4	Custom	867.500	125	L-B0	1



Connection Diagrams

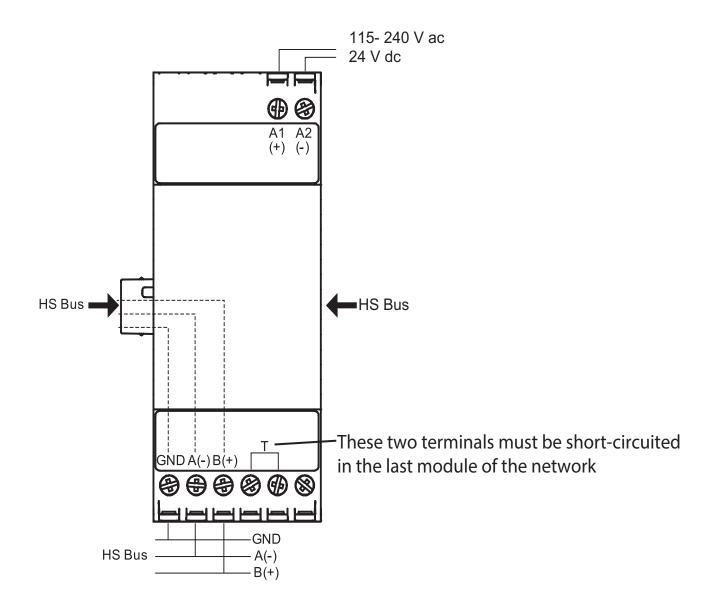



References

Further reading

Document	Where to find it
White paper	www.productselection.net/Pdf/UK/UWP-A-M-Whitepaper.pdf
Instruction manual	www.productselection.net/MANUALS/UK/UWPM_im.pdf

CARLO GAVAZZI compatible components

Purpose	Component name/code key	Notes
Universal web platform	UWP 3.0	See relevant datasheet
Wireless endpoint gateway	UWPA	See relevant datasheet

How to order

UWPA				
Code		Description		
UWPAM1US1L1X		Wireless endpoint gateway		
UWPM	Description			
UWPMM1UL1X		Master concentrator gateway		
	COPYRIGHT ©2019 Content subject to change. Download the PDF: www.productselection.net			