




CAT6 4P U/UTP E-Slim LSZH Dca AWG24 White cable (reel in box 305 m)

GGM C6UHR4WTU3

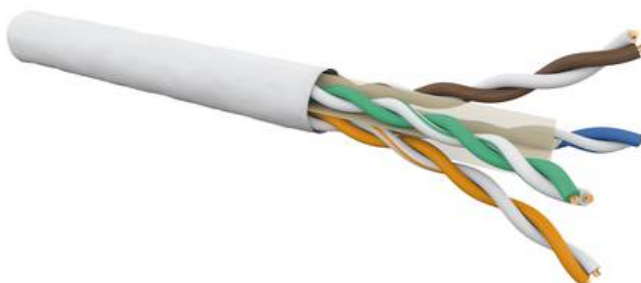

GIGAMEDIA CAT6 solution is designed to meet and exceed the performance levels described in the published cabling standards ISO/ IEC 11801, and ANSI/TIA/EIA 568C series and EN50173-1. The performance headroom provided makes it a reliable and safe choice to support all Class E applications including Gigabit Ethernet and PoE.

New 305m **Reel in Box** available !

- Packing available: 305 m RIB
- Single and Dual construction available
- Standards:
 - ANSI/TIA-568-C.2,
 - EN 50173,
 - ISO/IEC 11801
- Applications:
 - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
 - IEEE 802.3at/af (PoE/PoE+)
- Jacket: LSZH (IEC 60332-1) White RAL9010
- Outer jacket diameter: 5,2 mm
- Characteristic impedance: 100 ?
- Nominal velocity of propagation: 67 %
- Conductor bare copper wire, 24 AWG