




### GGM C6U4PHFPET3

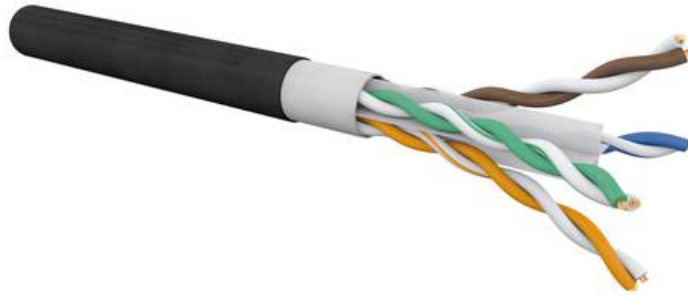

**Warning !**  
This picture does not show the exact color

- Packing available: 500 m, 305 m and 100 m
- Standards:
  - ANSI/TIA-568-C.2,
  - EN 50173,
  - ISO/IEC 11801
- Applications:
  - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
  - IEEE 802.3at/af (PoE/PoE+)
- Characteristic impedance: 100 Ω
- RAL 9005 PE black outer jacket
- Nominal velocity of propagation: 67 %
- Conductor bare copper wire, 23 AWG