

# User Manual


Thanks for choosing this wireless router, please read the user manual carefully so that it will be more convenient for you to use the router.

## 1. Product Manual

### 1.1 Product diagram



### 1.2 Product interface

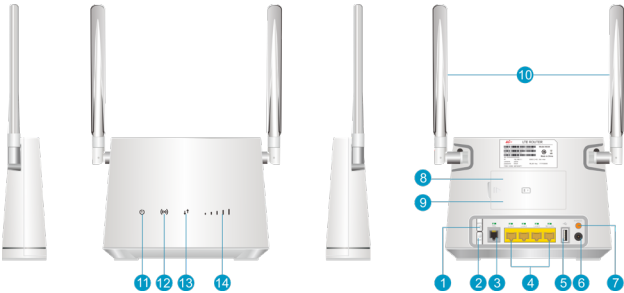





(1) WPS Button

(2) WLAN ON/OFF Switch

- (3) Phone Port
- (4) LAN Port
- (5) USB port
- (6) DC Power
- (7) Power Switch
- (8) Reset Button
- (9) SIM Card
- (10) External ANT Interface
- (11) Power LED
- (12) WIFI/WPS LED
- (13) LTE LED
- (14) Signal Strength LED

### 1.3 Indicator



Type	Status	Description
	Blue On	Power normal, the router power on
	Blue Off	Power abnormal, the router power off
	Blue On	WIFI is opened and has data transmission
	Blue blink	WPS
	Blue Off	WIFI closed
	Blue	Connected the internet
	Red	Not connected
	One	The Signal is poor
	Two	Signal is moderate
	Three	Signal is good
	Four	Signal is good
	Five	Signal is very good

### 1.4 Picture and guide for installation of external antenna, LAN, adaptor and PC.



- Turn off the router and unplug the power adapter before installing any external panel antenna.
- Do not use external antenna during thunderstorms.
- Only use external antennas provided by your carrier.

## 2. Quick Configuration Guide

The router supports standard RJ45 cable or WLAN wireless way to connect computer, Supports Windows XP/Windows 7/Windows 8/Window 10/MAC OS/Linux/Android, and so on.

- (1) Insert the SIM Card according to the given instructions.  
Connect the LAN cable to the LAN port and then check the power adapter label and device sticker if matched, before plug it to the power outlet.

