


Technical Datasheet **Firestop®**



tasker® TSK 1071 - 50 Ω Coax + Control Cable 1xRG174 A/U (50Ω) +2x0,50 mm²

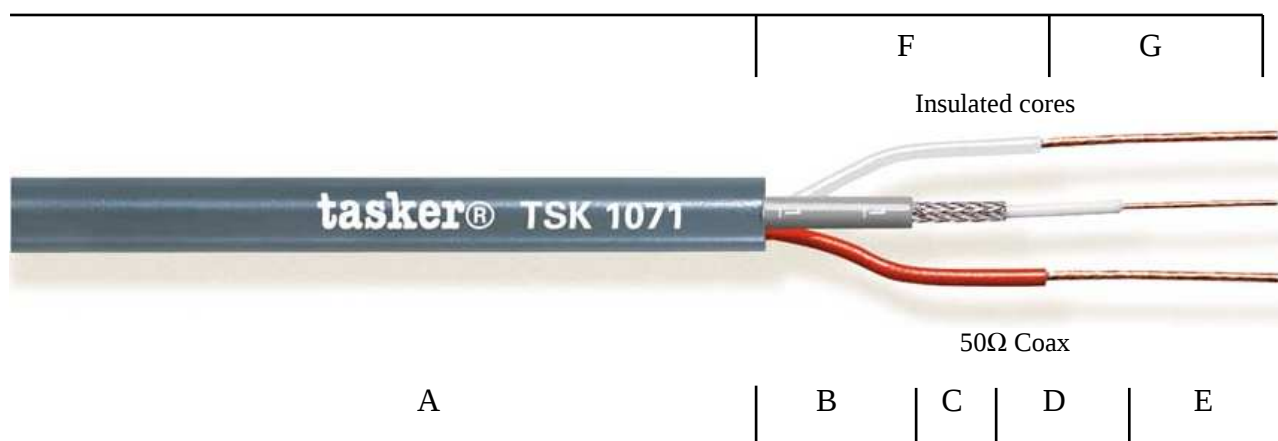

CATEGORY Komby Cable 50Ω (See Data Network Catalogue)
APPLICATIONS Digital Cameras, Video surveillance and Motorized Antennas.

A: Grey Soft **Flame Retardant PVC** sheath - Outer Diam. Ø 6,70 (± 0,20) mm.

RG174 A/U MIL. C17 F Standard (50 ohm):

B: Grey PVC Sheath – Diam.. Ø: 2,80 (± 0,20) mm.

C: Braid Shielding in O.F.C. tinned copper covering 98%.

D: Insulation in compact PE – Diam. Ø: 1,50 (± 0,20) mm.

E: Stranded CW formation 7x0,16 mm – nom. Cross section 1x0,14 mm².

Insulated cores:

F : Grey Soft **Flame Retardant PVC** sheath. Colored one white and one red.
Diam. Ø: 2,00 (± 0,20) mm.

G: Stranded formation in O.F.C. tinned copper of 16x0,20 mm.
Nom. Cross section 2x0,50 mm².



MILAN S.r.l. a socio unico

Head Office – Export department:

Viale Europa, 74
20090 Cusago (MI) Italy
T. +39 02 9039.4556-4158
F. +39 02 9039.4551
www.taskercables.com

Ufficio Commerciale e Centro Distribuzione

Viale Europa 72 Strada F12
20090 Cusago (MI) Italy
T. +39 02 9039.0037-0059
F. +39 02 9039.0049
www.tasker.it

MARKING

tasker® TSK 1071 1x0,50 Ohm + 2x0,50 mm² Special Coax Cable FirestoP®
MADE IN ITALY

**CUSTOM
PRODUCTION**

This product may be custom produced also with **L.S.Z.H.** polymer, **PE** or **PUR** sheath, with or without Metallic Armor.

General properties

0,50 mm² Conductors	38 Ω/Km
Coax Conductor Resistance	290 Ω/Km
Impedence	50 Ω
Capacity Core/Shield	100 pF/m
Operative Temperature	-20/+70°C

Attenuation dB/100 m.

100 MHz	25,8
200 MHz	38,2
400 MHz	54,9
800 MHz	77,0
1000 MHz	87,5

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			