

CERTIFICATE

Issued to:
Applicant:
Pipelife Nederland B.V.
Flevolaan 7
1601 MA Enkhuisen
The Netherlands

Manufacturer/Licensee:
Pipelife Nederland B.V.
Flevolaan 7
1601 MA Enkhuisen
The Netherlands

Product : Conduit systems for cable management (rigid conduits)
Trade name : PIPELIFE
Types : POLVALIT UVS M16 Low Friction
POLVALIT UVS M20 Low Friction
POLVALIT UVS M25
POLVALIT UVS M32
POLVALIT UVS M40
POLVALIT UVS M50

The product and any acceptable variation thereto is specified in the Annex to this certificate and the documents therein referred to.

DEKRA hereby declares that the above-mentioned product has been certified on the basis of:

- a type test according to the standard NEN-EN 61386-1:2008 and NEN-EN 61386-21:2004
- an inspection of the production location according to CENELEC Operational Document CIG 021
- a certification agreement with the number 900427

DEKRA hereby grants the right to use the KEMA-KEUR certification mark.

The KEMA-KEUR certification mark may be applied to the product as specified in this certificate for the duration of the KEMA-KEUR certification agreement and under the conditions of the KEMA-KEUR certification agreement.

This certificate is issued on: 29 April 2015 and expires upon withdrawal of one of the above mentioned standards.

Certificate number: 2176001.01

DEKRA Certification B.V.



drs. G.J. Zoetbrood
Managing Director



H.R.M. Barends
Certification Manager

© Integral publication of this certificate is allowed

ACCREDITED BY THE
DUTCH ACCREDITATION
COUNCIL



SPECIFICATION OF THE CERTIFIED PRODUCT**Product data**

product	:	Conduit systems for cable management (rigid conduits)
trade name	:	PIPELIFE UV
types	:	POLVALIT UVS M16 Low Friction POLVALIT UVS M20 Low Friction POLVALIT UVS M25 POLVALIT UVS M32 POLVALIT UVS M40 POLVALIT UVS M50

Product data - type POLVALIT UVS M16 Low Friction and POLVALIT UVS M20 Low Friction

material	:	PVC compound with inside a low friction layer
colour	:	black
resistance to compression	:	3
resistance to impact	:	4
lower temperature range	:	4
upper temperature range	:	1
tested conduit	:	POLVALIT UVS M16 Low Friction POLVALIT UVS M20 Low Friction
certified conduits	:	POLVALIT UVS M16 Low Friction POLVALIT UVS M20 Low Friction

Product data - type POLVALIT UVS M25, POLVALIT UVS M32, POLVALIT UVS M40 and POLVALIT UVS M50

material	:	PVC compound
colour	:	black
resistance to compression	:	3
resistance to impact	:	4
lower temperature range	:	4
upper temperature range	:	1
tested conduits	:	POLVALIT UVS M32 POLVALIT UVS M50
certified conduits	:	POLVALIT UVS M25 POLVALIT UVS M32 POLVALIT UVS M40 POLVALIT UVS M50

TESTS**Test requirements**

NEN-EN 61386-1:2008

NEN-EN 61386-21:2004/A11:2010

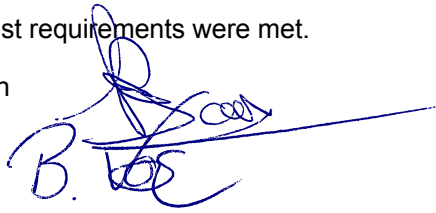
Test result

The test results are laid down in DEKRA test file 2176001.01.

Conclusion

The examination proved that all test requirements were met.

Tested by : R. van Daalen
Checked by : B. Vos

A handwritten signature in blue ink, appearing to read 'B. Vos', with a long horizontal stroke extending to the right.

Factory location

Pipelife Nederland B.V.
Flevolaan 7
1601 MA, Enkhuizen
The Netherlands