


KRP 11/7

Reduction adaptor, polyamide, RAL 7035, Pg11 / Pg7



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

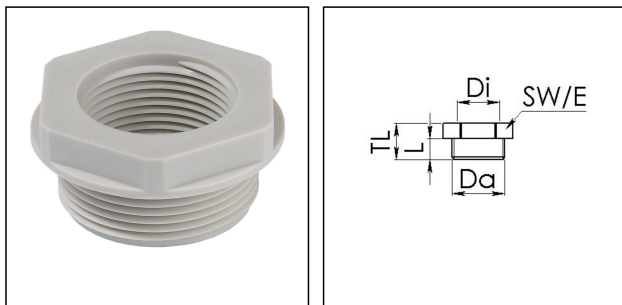

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Thread type outer	PG
Ø outer thread	11
Length screw-in thread L	9 mm
Thread type inner	PG
Ø inner thread	7
Total length TL	16 mm
Key width SW	22 mm
Collar diameter (E)	24 mm
Form	B
Product Color	RAL 7035
Order no. RAL 7035	10063605
Type	KRP 11/7
Packing unit	100
ETIM-Classification	EC000938

Recommended accessories

MUG 11	10060672
ADR 11	10061421

25.05.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

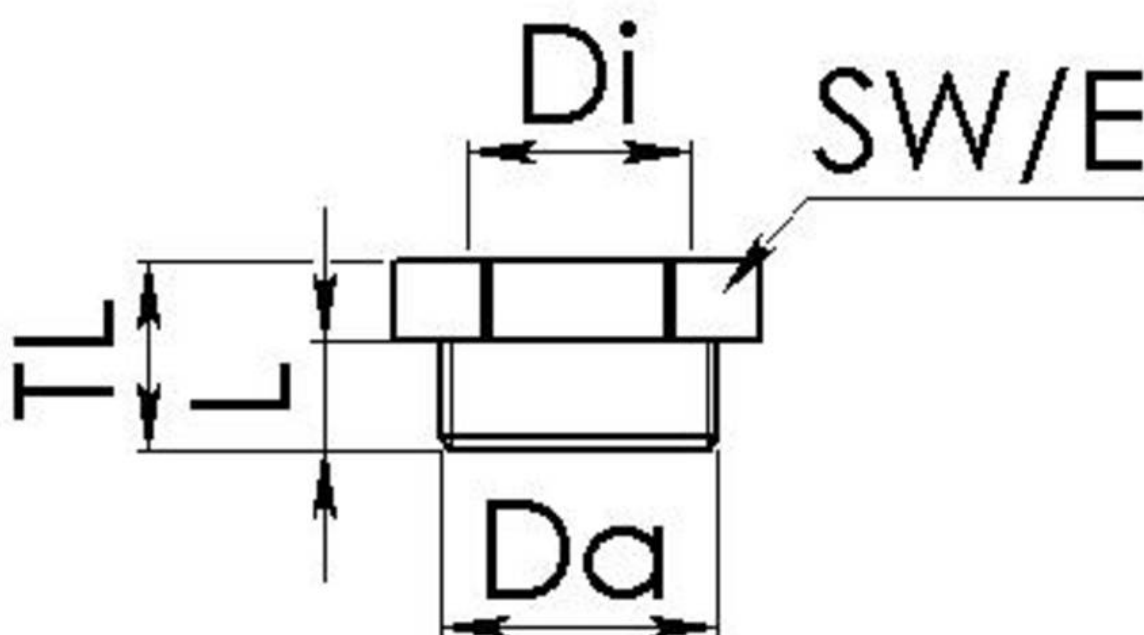

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com