


KRP 13,5/11

Reduction adaptor, polyamide, RAL 7035, Pg13,5 / Pg11



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

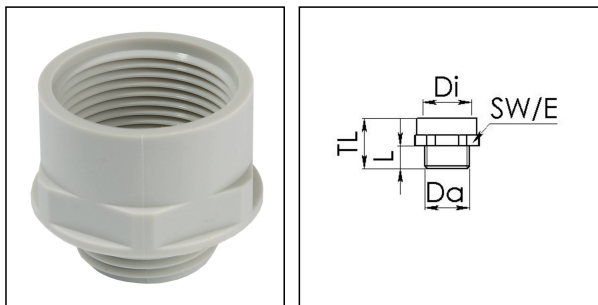

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Thread type outer	PG
Ø outer thread	13,5
Length screw-in thread L	10 mm
Thread type inner	PG
Ø inner thread	11
Length internal thread	15,5 mm
Total length TL	28 mm
Key width SW	24 mm
Collar diameter (E)	27 mm
Form	A
Product Color	RAL 7035
Order no. RAL 7035	10063609
Type	KRP 13,5/11
Packing unit	100
ETIM-Classification	EC000938

Recommended accessories

MUG 13,5	10060673
ADR 13,5	10061422

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

25.05.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

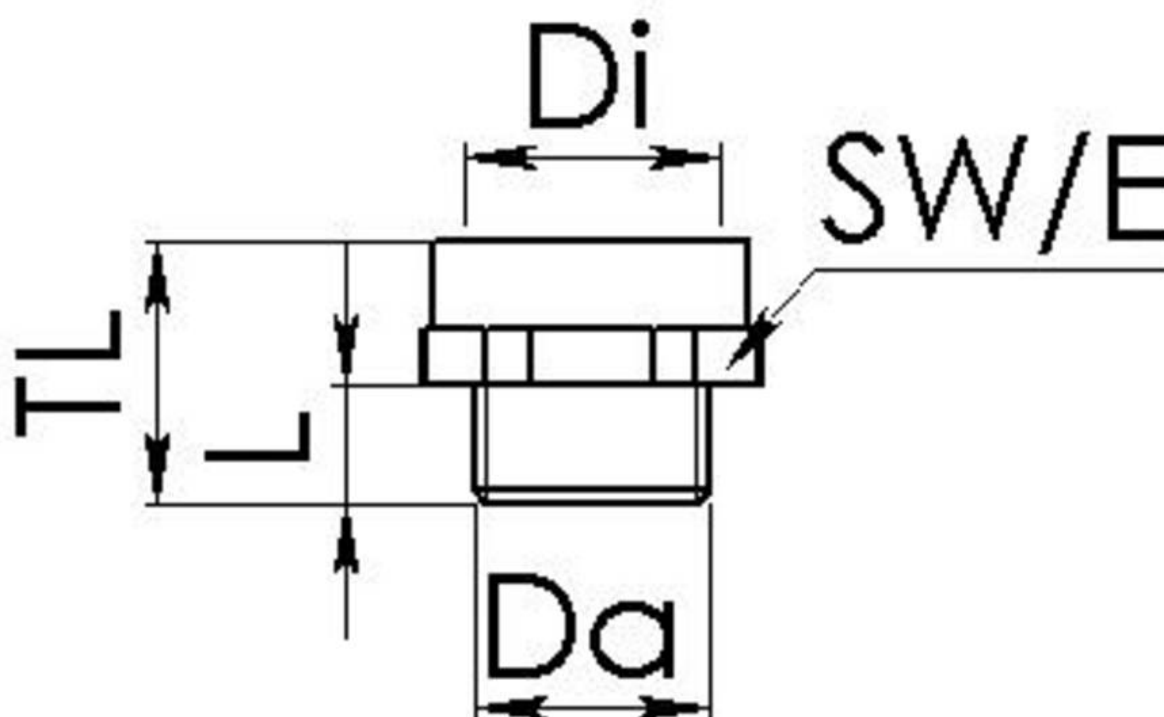

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice