


AMMP 25/16

Adaptor, brass nickel-plated, M25 / Pg16



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

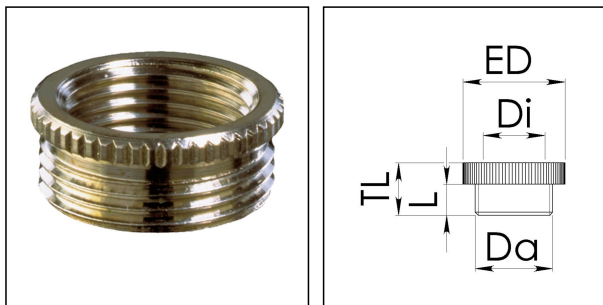

Material	Brass nickel-plated
Temp. range min	-200 °C
Temp. range max	250 °C
Thread type outer	M
Ø outer thread	25
Lead outer	1,5
Length screw-in thread L	7 mm
Thread type inner	PG
Ø inner thread	16
Key width SW	24 mm
Collar diameter (E)	26 mm
External diameter ED	28 mm
Total length TL	10 mm
Form	B
Surface	Nickel-plated
Order no. nickel-plated	10063922
Type	AMMP 25/16
Packing unit	50
ETIM-Classification	EC000938

Recommended accessories

EMMU 25	10063144
ORD-E 25	10064700

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

27.05.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

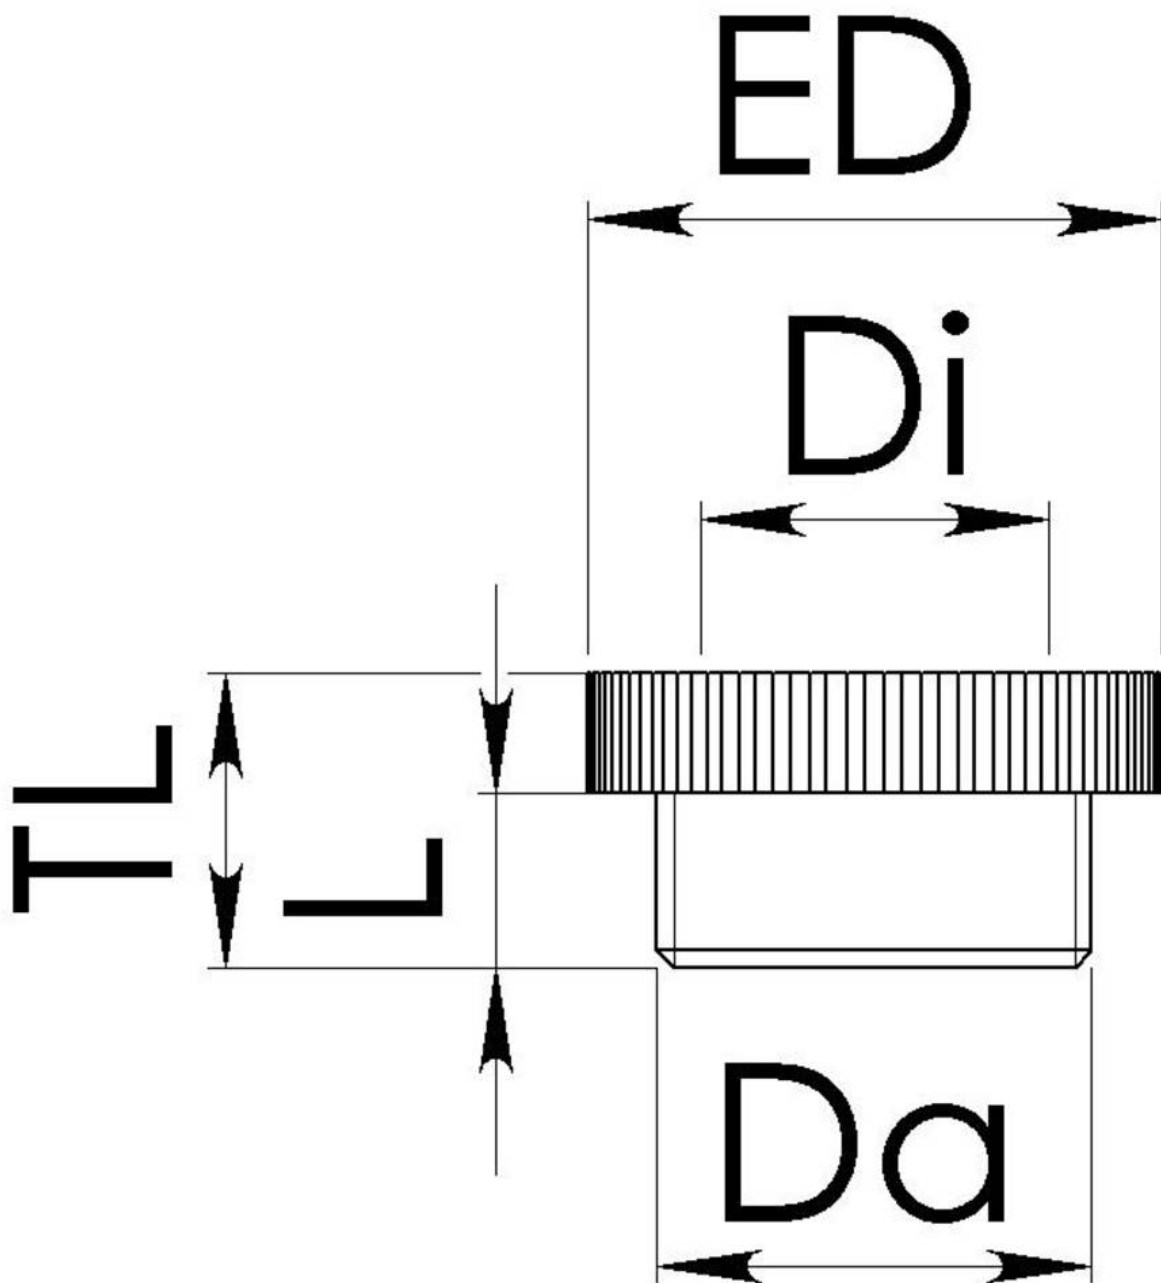

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice