


AMMP 32/29

Adaptor, brass nickel-plated, M32 / Pg29



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



Material	Brass nickel-plated
Temp. range min	-200 °C
Temp. range max	250 °C
Thread type outer	M
Ø outer thread	32
Lead outer	1,5
Length screw-in thread L	8 mm
Thread type inner	PG
Ø inner thread	29
Length internal thread	15 mm
Key width SW	40 mm
Collar diameter (E)	43 mm
Total length TL	24,5 mm
Form	A
Surface	Nickel-plated
Order no. nickel-plated	10063927
Type	AMMP 32/29
Packing unit	25
ETIM-Classification	EC000938

Recommended accessories

EMMU 32	10063145
ORD-E 32	10064701

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

27.05.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

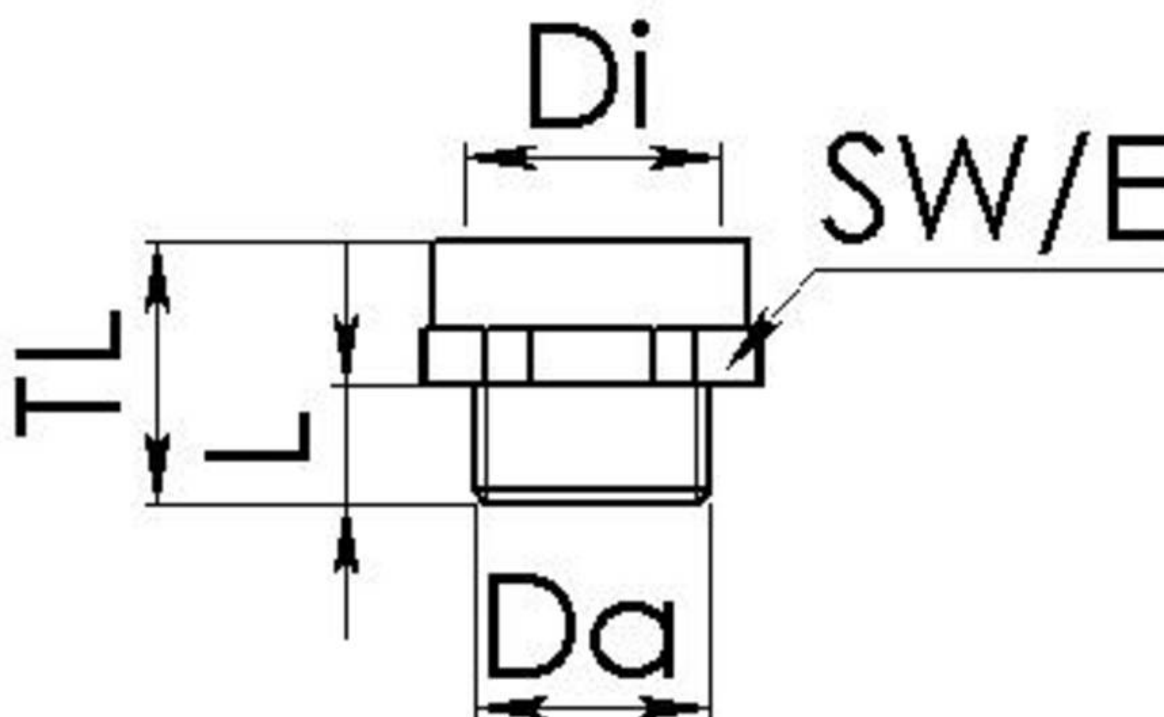

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice