


MRM 20/12

Reduction adaptor, brass nickel-plated, M20/M12



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

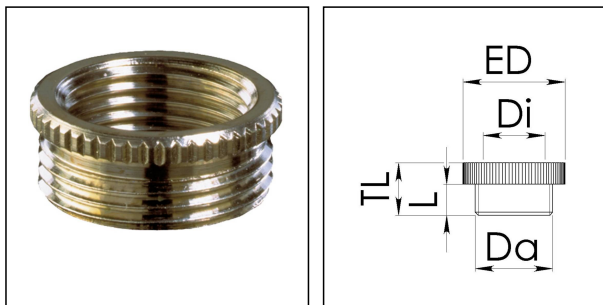

Material	Brass nickel-plated
Temp. range min	-200 °C
Temp. range max	250 °C
Thread type outer	M
Ø outer thread	20
Lead outer	1,5
Length screw-in thread L	6 mm
Thread type inner	M
Ø inner thread	12
Lead inner	1,5
External diameter ED	24 mm
Total length TL	8,5 mm
Surface	Nickel-plated
Order no. nickel-plated	10063941
Type	MRM 20/12
Packing unit	100
ETIM-Classification	EC000938

Recommended accessories

EMMU 20	10063143
ORD-E 20 + PG11	10064699

27.05.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

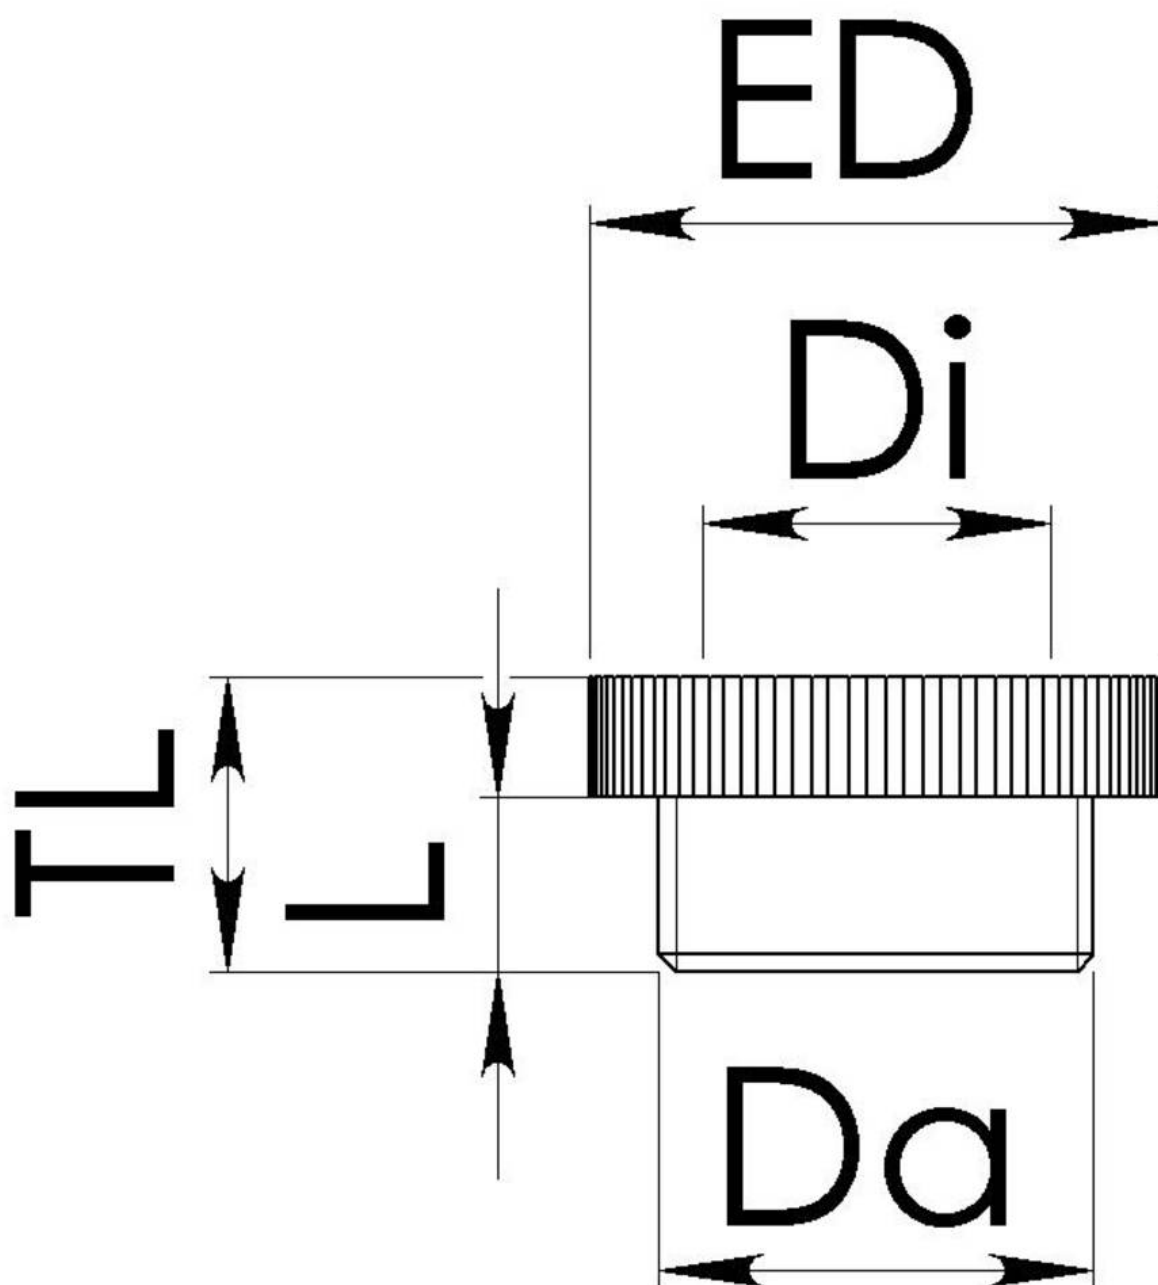

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice