

## EMT 32

Membrane spout, TPE, RAL 7035, M32



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



|                                 |                         |
|---------------------------------|-------------------------|
| <b>Material</b>                 | Thermoplastic elastomer |
| <b>Temp. range min</b>          | -40 °C                  |
| <b>Temp. range max</b>          | 80 °C                   |
| <b>Glow wire test</b>           | 750 °C                  |
| <b>Protection class</b>         | IP66                    |
| <b>Ø Connection thread D</b>    | 32                      |
| <b>Length screw-in thread L</b> | 9,5 mm                  |
| <b>Ø cable diameter min</b>     | 1 mm                    |
| <b>Ø cable diameter max</b>     | 25 mm                   |
| <b>External diameter ED</b>     | 37 mm                   |
| <b>Total length TL</b>          | 11 mm                   |
| <b>Ø Drilling</b>               | 32 mm - 33,2 mm         |
| <b>Wall thickness S</b>         | 2 mm                    |
| <b>Product Color</b>            | RAL 7035                |
| <b>Order no. RAL 7035</b>       | 10062562                |
| <b>Type</b>                     | EMT 32                  |
| <b>Packing unit</b>             | 100                     |
| <b>ETIM-Classification</b>      | EC000451                |

26.08.2021


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

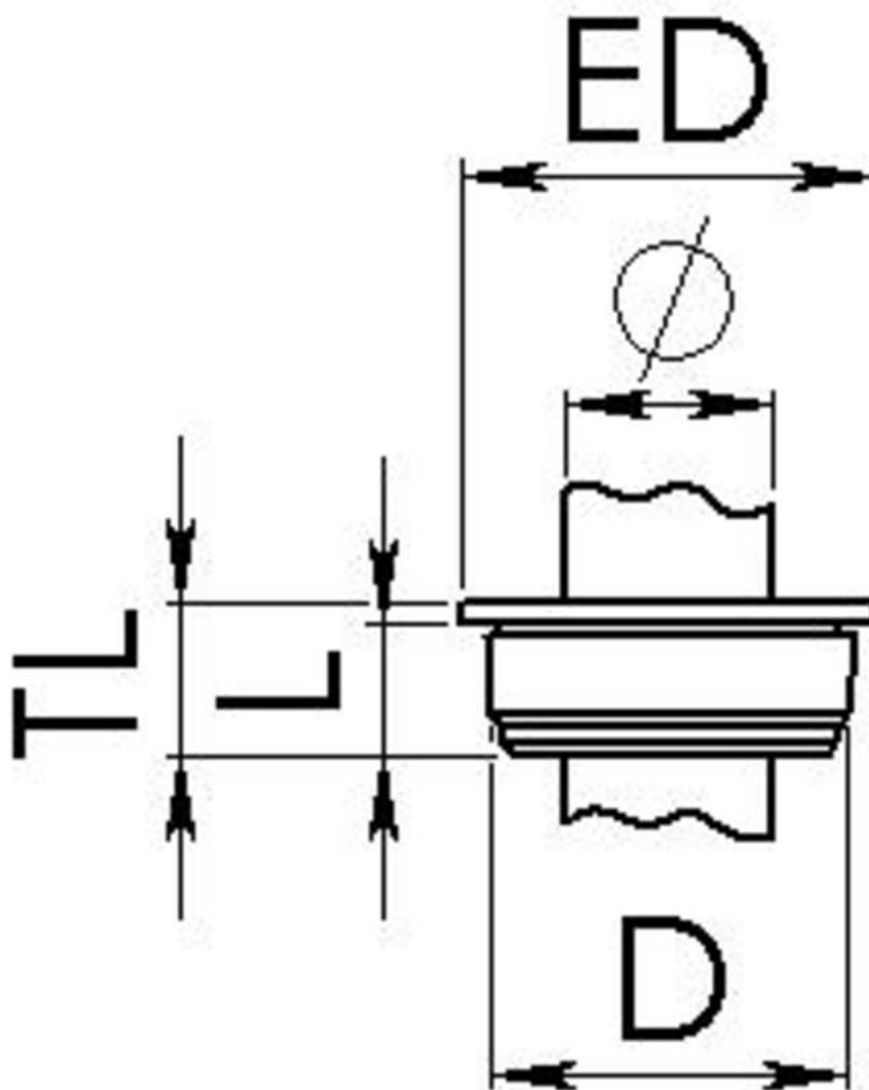

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice