

**Tuotetiedot**

|            |                                                    |             |                |             |                      |
|------------|----------------------------------------------------|-------------|----------------|-------------|----------------------|
| Tuotekoodi | <b>VE04-0001</b>                                   | Sähkönumero | <b>1912127</b> | EAN-koodi   | <b>6410019121278</b> |
| Tuotenimi  | Potentialitasauskisko 5xAl/Cu 6-50 mm <sup>2</sup> |             |                | ETIM-luokka | <b>EC001470</b>      |
| Johtimet   | 5xAl/Cu 6-50 mm <sup>2</sup>                       |             |                |             |                      |

**Tekniset tiedot**

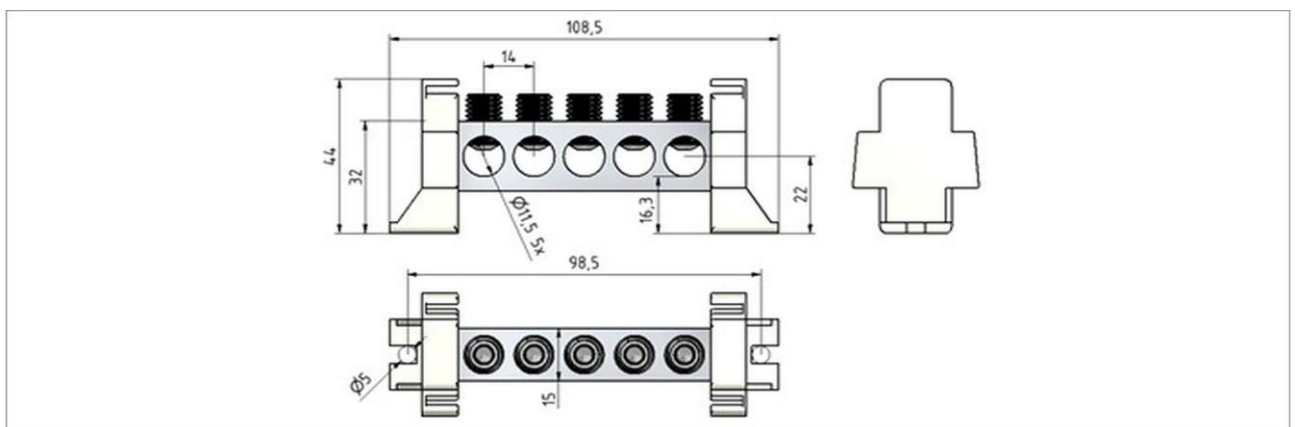
|                       |                       |                 |
|-----------------------|-----------------------|-----------------|
|                       | -                     |                 |
|                       | -                     |                 |
| Nimellisjännite (IEC) | <b>690</b>            | V               |
|                       | -                     |                 |
|                       | -                     |                 |
|                       | -                     |                 |
| Napaluku              | <b>1</b>              | kpl             |
| Max. Johdinkoko       | <b>50</b>             | mm <sup>2</sup> |
| Kiristysmomentti      |                       |                 |
|                       | 6-16 mm <sup>2</sup>  | <b>7</b> Nm     |
|                       | 25-50 mm <sup>2</sup> | <b>14</b> Nm    |
|                       | -                     |                 |
|                       | -                     |                 |
|                       | -                     |                 |
| Käyttölämpötila       | <b>80</b>             | °C              |
| Paino                 | <b>68</b>             | g               |
|                       | -                     |                 |



Kiinnitys / Kytcentä **Ruuvikiinnitys max. M5**

**Kuvaus**

Potentiaalitasauskiskoja käytetään sähkölaitteiden potentiaalitasausjohtimien yhdistämiseen/ kokoamiseen. Kytcentäkisko on valmistettu alumiinista ja pinnoitettu tinalla. Päätykappaleiden materiaali testattu UL 746C, soveltuu ulkokäyttöön.

**Mittakuva**

**Pakkaus**

|              |                 |               |            |              |             |
|--------------|-----------------|---------------|------------|--------------|-------------|
| Pakkausmuoto | <b>Laatikko</b> | Kpl / Pakkaus | <b>5</b>   | Paino [kg]   | <b>0,40</b> |
| Pituus [mm]  | <b>100</b>      | Leveys [mm]   | <b>130</b> | Korkeus [mm] | <b>100</b>  |

**Ouneva Oy**

Teollisuustie 21  
 FI-82730 Tuupovaara  
 Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)

[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)

**Product data**

|              |                                                          |          |                |            |                      |
|--------------|----------------------------------------------------------|----------|----------------|------------|----------------------|
| Product code | <b>VE04-0001</b>                                         | STK-code | <b>1912127</b> | EAN-code   | <b>6410019121278</b> |
| Product name | Potential equalizer busbars 5xAl/Cu 6-50 mm <sup>2</sup> |          |                | ETIM class | <b>EC001470</b>      |
| Wires        | 5xAl/Cu 6-50 mm <sup>2</sup>                             |          |                |            |                      |

**Technical data**

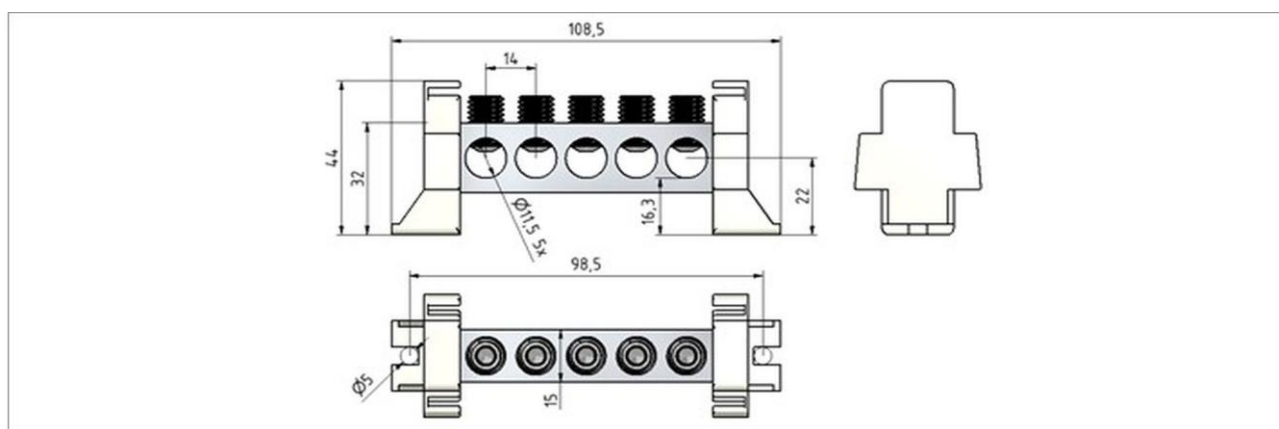
|                       |                       |                 |
|-----------------------|-----------------------|-----------------|
|                       | -                     |                 |
|                       | -                     |                 |
| Nominal voltage (IEC) | <b>690</b>            | V               |
|                       | -                     |                 |
|                       | -                     |                 |
|                       | -                     |                 |
| Number of poles       | <b>1</b>              | pcs             |
| Max. Cross section    | <b>50</b>             | mm <sup>2</sup> |
| Tightening torque     |                       |                 |
|                       | 6-16 mm <sup>2</sup>  | <b>7</b> Nm     |
|                       | 25-50 mm <sup>2</sup> | <b>14</b> Nm    |
|                       | -                     |                 |
|                       | -                     |                 |
|                       | -                     |                 |
| Operating temperature | <b>80</b>             | °C              |
| Weight                | <b>68</b>             | g               |
|                       | -                     |                 |



Mounting / Connection **Screw max. M5 mounting**

**Description**

Potential equalizer busbars are used to connecting or assembling potential-equalizer cables. Busbars are made of aluminium and plated with tin. Covers material tested UL 746C, suitable for outdoor use.

**Drawing**

**Package**

|             |            |               |            |             |             |
|-------------|------------|---------------|------------|-------------|-------------|
| Package     | <b>Box</b> | Pcs / Package | <b>5</b>   | Weight [kg] | <b>0,40</b> |
| Length [mm] | <b>100</b> | Width [mm]    | <b>130</b> | Height [mm] | <b>100</b>  |

**Ouneva Oy**

Teollisuustie 21  
 FI-82730 Tuupovaara  
 Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)

[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)