


Tuotetiedot					
Tuotekoodi	Tuotenimi	I_n Al	I_n Cu	U_n	
VC02-0003	Yleiskaapelikenkä 16-120mm²	230 A	280 A	690 V	
		I_{max} Al	I_{max} Cu	U_{max}	
		-	-	-	



Asennus	
Asennustapa	Ruuvi M14

OT-yleisliittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen.

- Poista eristys kaapelista. Ks. kuorintapituus L_1 taulukosta alapuolella.
- Poista mahdollinen oksidikerros harjaamalla.
- Sektorikaapeli on muokattava pyöreäksi ennen asennusta.
- Liitin on esirasvattu liitosrasvalla.

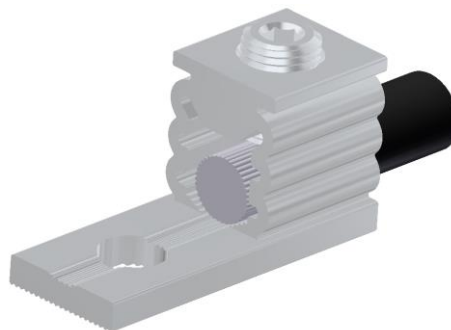


Kytcentä					
Ruuvien avainväli	AV	6 mm	Kaapelit	1xAl/Cu 16-120 mm²	
Kirstysmomentti M	16-35 mm ²	12 Nm	Kuorintapituus	L_1	26±1 mm
	50-120 mm ²	25 Nm			
	-	-			
	-	-			

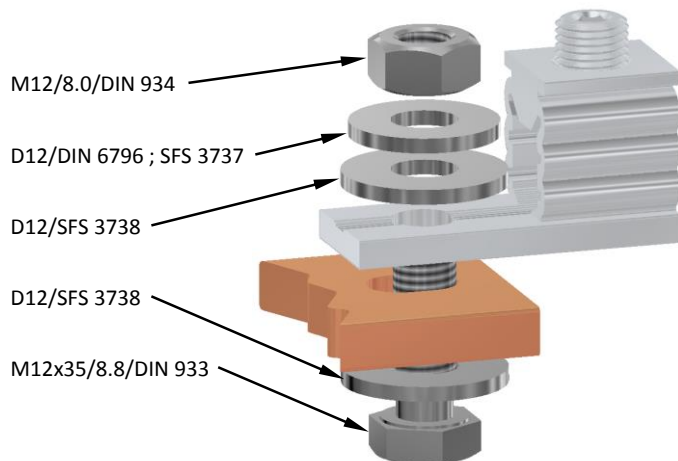

Asennus virtakiskoon:

- Kun kytket liittimen virtakiskoon, varmistu että liitospinnat ovat puhtaat ja reikien reunoilla ei ole purseita.
 - Käytä kuvan mukaisia tai vastaavia kiinnitystarvikkeita.
 - Suositus kiristysmomentti 50-75 Nm
- Huom! Ruuvien pituus riippuu virtakiskon paksuudesta.

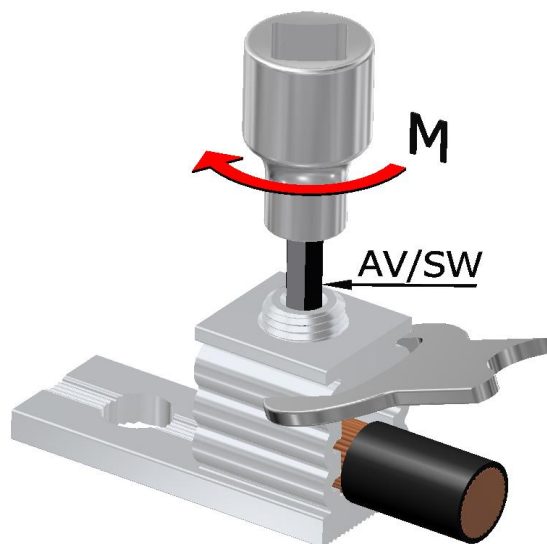

- Kiristä liitinruuvi yllämainittuun kiristysmomenttiin **M**.
- Tue liittintä kiristyksen aikana.

Johdintaulukko, johtojen määrä, kpl/ kytcentätila, Al-kaapeli suluissa, Cu(Al)							
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²
-	-	-	-	3(1)	3(1)	3(1)	2(1)
70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
1(1)	1(1)	1(1)	-	-	-	-	-

Ouneva Oy

Teollisuustie 21

FI-82730 Tuupovaara

Finland

Tel. +358 400 179 750

info@ouneva.fi

www.ounevagroup.fi


www.ounevaproducts.fi

Product data					
Product code	Product name	I_n Al	I_n Cu	U_n	
VC02-0003	Universal connector 16-120mm²	230 A	280	690 V	
		I_{max} Al	I_{max} Cu	U_{max}	
		-	-	-	


Installation	
Type	Screw M14

OT-Connectors are suitable for Aluminium- and Copper conductors.

- Strip cable, see stripping length L_1 (table below)
- Remove any layers of oxide.
- Segmental conductors have to be rounded before mounting.

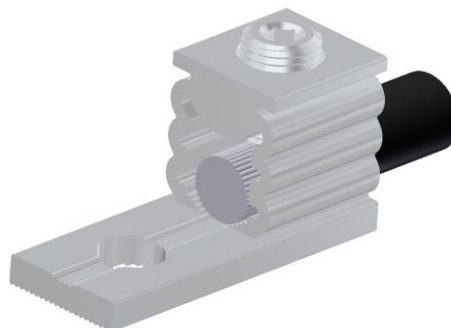


Connection				
Screw head for tool	SW	6 mm	Conductors	1xAl/Cu 16-120 mm²
Tightening torque M	16-35 mm ²	12 Nm	Stripping length	L_1 26±1 mm
	50-120 mm ²	25 Nm		
	-	-		
	-	-		

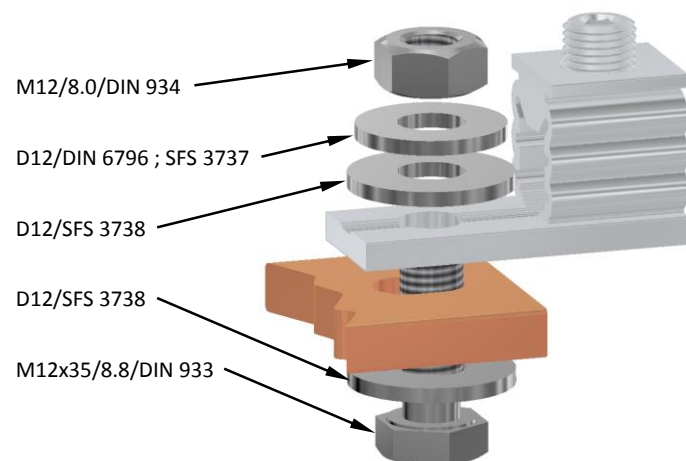

Mounting to busbar:

- Be sure that there are no burrs around the hole.
- Length of the screw depends on the busbar thickness.
- Use standard screws, nuts and washers. (Plated with Zn)
- Recommended torque for M12 is 50-75 Nm

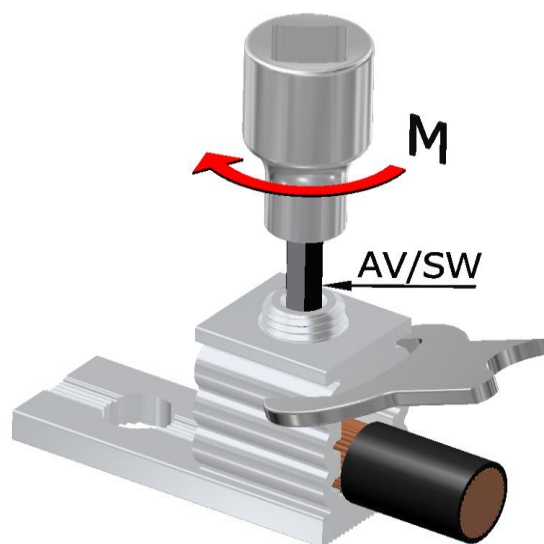

- Tighten the screw with torque **M**
- Support connector during tightening.

Wiring, pcs / connection, Cu(Al)							
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²
-	-	-	-	3(1)	3(1)	3(1)	2(1)
70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
1(1)	1(1)	1(1)	-	-	-	-	-

Ouneva Oy

Teollisuustie 21

FI-82730 Tuupovaara

Finland

Tel. +358 400 179 750

info@ouneva.fi

www.ounevagroup.fi

www.ounevaproducts.fi