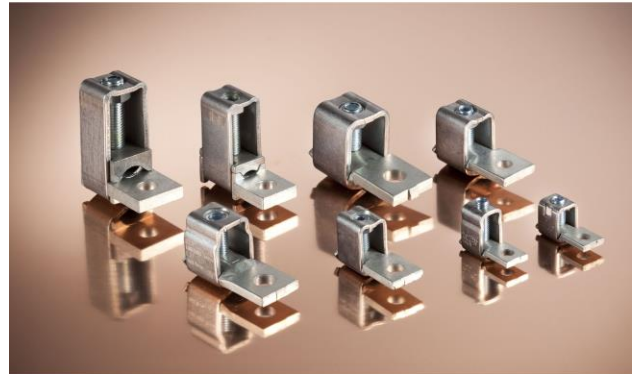


Tuotetiedot

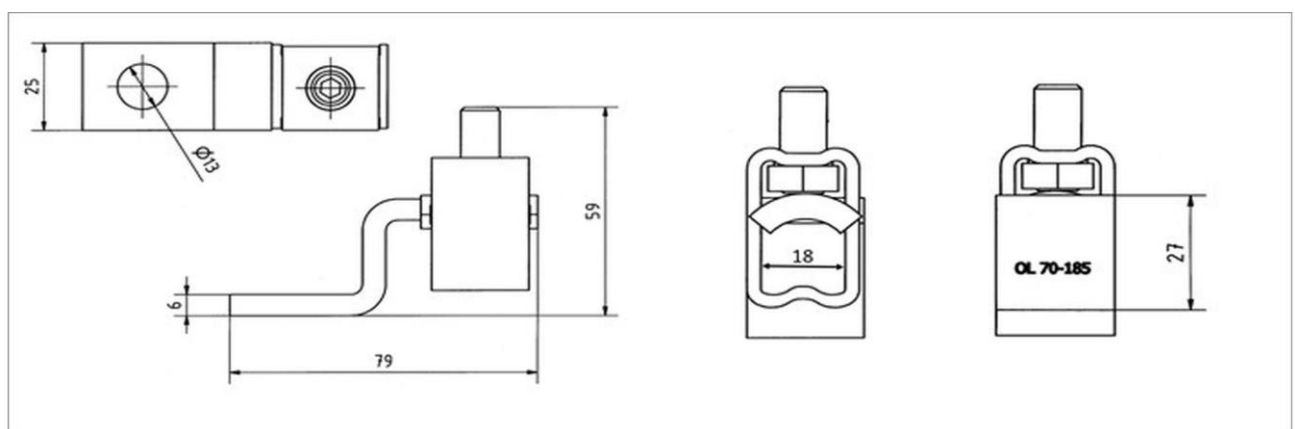
Tuotekoodi	VC01-0008	Sähkönumero	1912330	EAN-koodi	6410019123302
Tuotenimi	OL 70-185 Z	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 70-185 mm²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	400	A
	Al	400	A
		-	
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		185	mm ²
Kiristysmomentti			
	70-185 mm ²	40	Nm
		-	
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		195	g
		-	
		-	
Väri / Materiaali	Ruostumaton teräs/ Tinapinnoitettu kupari		
Kiinnitys / Kytkeä	Kuusiokoloruuvi M10		


Kuvaus

OL-yleisliittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen. Liittimen kehys on ruostumatonta terästä ja liitinkisko/ painin on tinapinnoitettua kuparia.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	15	Paino [kg]	2,98
Pituus [mm]	176	Leveys [mm]	141	Korkeus [mm]	80

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

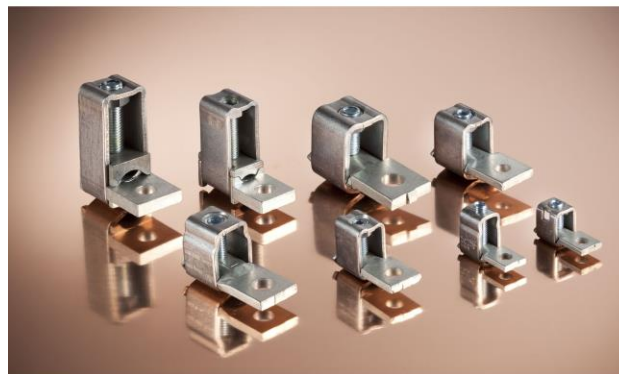
www.ounevagroup.fi
www.ounevaproducts.fi

Product data

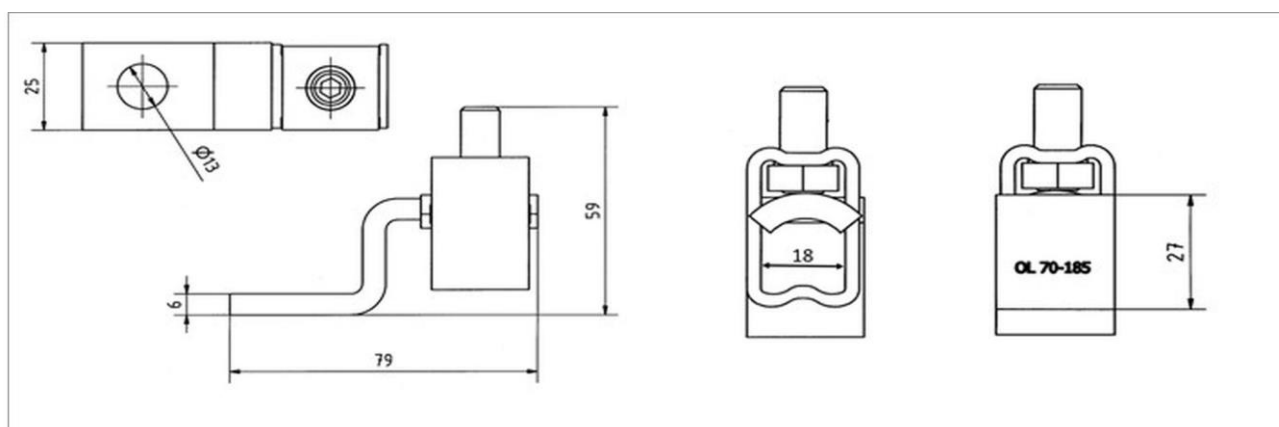
Product code	VC01-0008	STK-code	1912330	EAN-code	6410019123302
Product name	OL 70-185 Z			ETIM class	EC000897
Wires	1xAl/Cu 70-185 mm ²				

Technical data

Nominal current (IEC)	Cu	400	A
	Al	400	A
		-	
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		185	mm ²
Tightening torque			
	70-185 mm ²	40	Nm
		-	
		-	
		-	
		-	
Operating temperature		80	°C
Weight		195	g
		-	
		-	
Color / Material	Stainless steel/ Tin plated copper		
Mounting / Connection	Screw M10		


Description

OL-connectors are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars are tin plated copper.

Drawing

Package

Package	Box	Pcs / Package	15	Weight [kg]	2,98
Length [mm]	176	Width [mm]	141	Height [mm]	80

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi