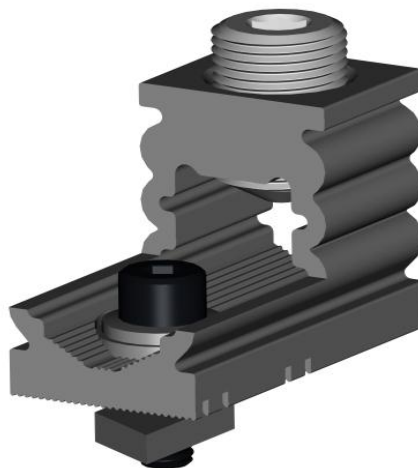


Tuotetiedot

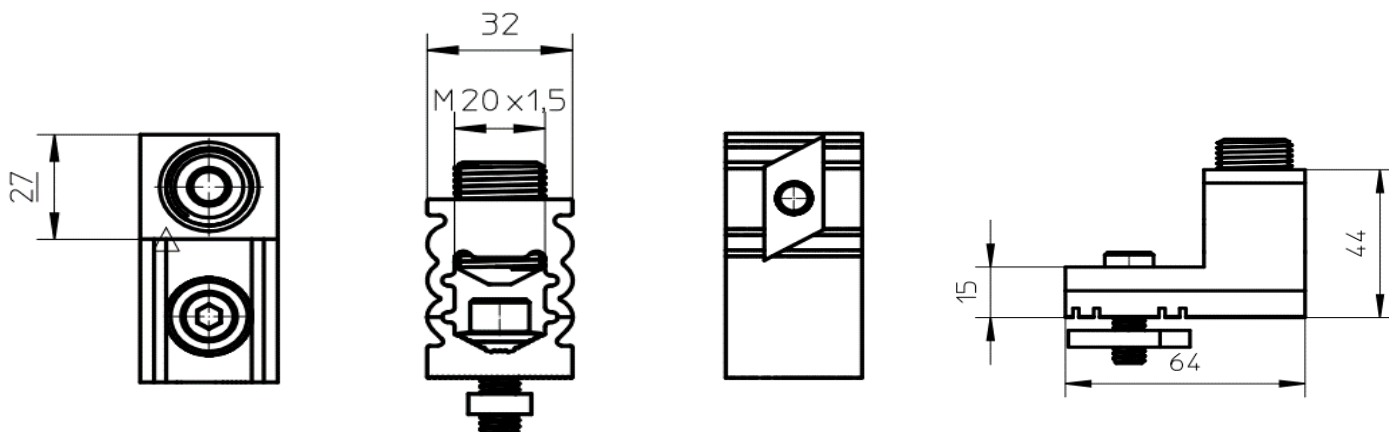
Tuotekoodi	VC02-0024	Sähkönumero	1912332	EAN-koodi	6410019123326
Tuotenimi	Yleiskaapelikenkä vk 35-240mm ²				
Johtimet	1xAl/Cu 35-240 mm ²				

Tekniset tiedot

Nimellisvirta	Cu	425	A
	Al	380	A
Nimellisjännite		690	V
Max. Virta (US)	Cu	-	A
	Al	-	A
Max. Jännite (US)		-	V
Napaluku		1	
Max. Johdin koko		240	mm ²
Kivistysmomentti	35-120 mm ²	26	Nm
	150-240 mm ²	40	Nm
Max. Käyttölämpötila		80	°C
Paino		134	g
IP-suojaus		-	
Standardit	-		
Väri/ Materiaali	Sn		
Kiinnitys/ Kytkeä	Ruuvi M18 ja M8, liukumutteri M8		


Kuvaus

Yleiskaapelikenkä vk on tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen virtakiskoon.

Mittakuva

Pakkaus

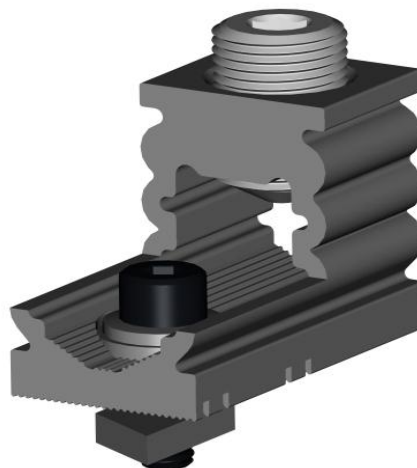
Pakkausmuoto	Laatikko	Kpl / Pakkaus	50	Paino [kg]	6,75
Pituus [mm]	185	Leveys [mm]	295	Korkeus [mm]	98

Product data

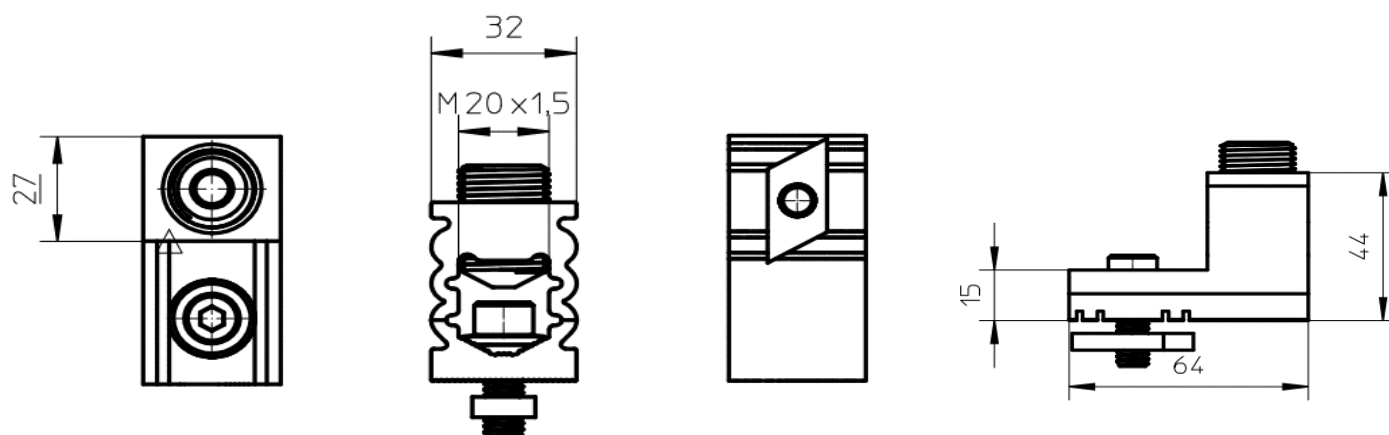
Product code	VC02-0024	STK-code	1912332	EAN-code	6410019123326
Product name	Universal connector vk 35-240mm ²				
Wires	1xAl/Cu 35-240 mm ²				

Technical data

Nominal current	Cu	425	A
	Al	380	A
Nominal voltage		690	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of pole		1	
Max. Cross section		240	mm ²
Tightening torque	35-120 mm ²	26	Nm
	150-240 mm ²	40	Nm
Max. Operating temperature		80	°C
Weight		134	g
IP-protection		-	
Standards	-		
Color/ Material	Sn		
Mounting/ Connection	Screw M18 and M8, Slide nut M8		


Description

Universal connector vk is suitable for connecting Aluminium- and Copper conductors to busbars.

Drawing

Package

Package	Box	Pcs / Package	50	Weight [kg]	6,75
Length [mm]	185	Width [mm]	295	Height [mm]	98