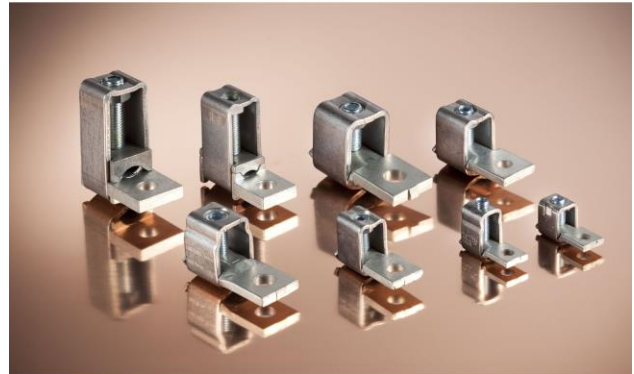


Tuotetiedot

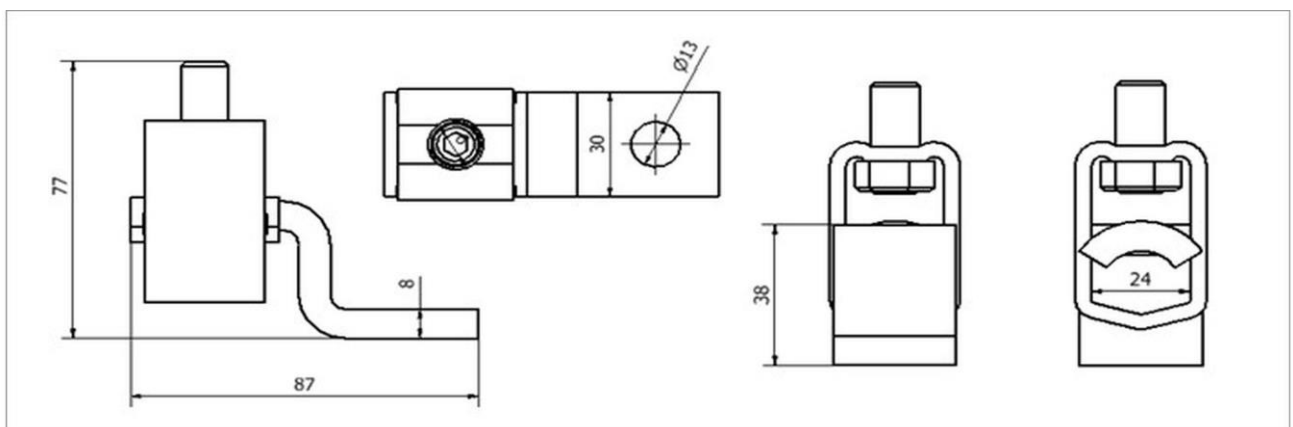
Tuotekoodi	VC01-0009	Sähkönumero	1912333	EAN-koodi	6410019123333
Tuotenimi	OL 185-300 Z	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 185-300 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	560	A
	Al	560	A
		-	
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		300	mm ²
Kiristysmomentti			
	185-300 mm ²	70	Nm
		-	
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		287	g
		-	
Standardit	UL 486E		
Väri / Materiaali	Ruostumaton teräs/ Tinapinnoitettu kupari		
Kiinnitys / KytKentä	Kuusiokoloruuvi M12		


Kuvaus

OL-yleisliittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen. Liittimen kehys on ruostumatonta terästä ja liitinkisko/ painin on tinapinnoitettua kuparia.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	3	Paino [kg]	0,88
Pituus [mm]	86	Leveys [mm]	68	Korkeus [mm]	82

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

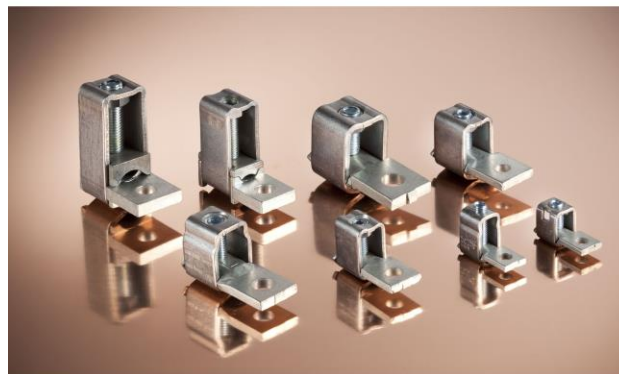
www.ounevagroup.fi
www.ounevaproducts.fi

Product data

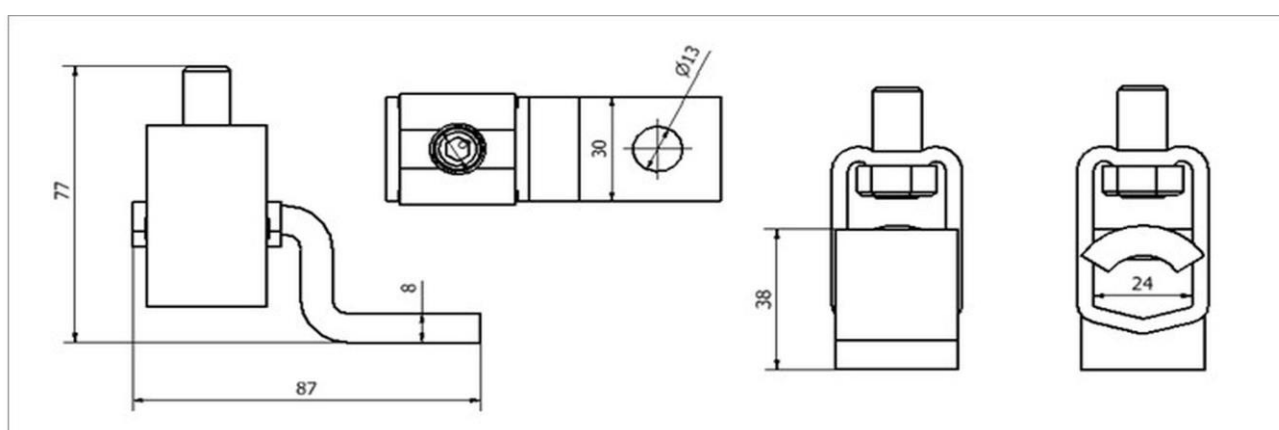
Product code	VC01-0009	STK-code	1912333	EAN-code	6410019123333
Product name	OL 185-300 Z			ETIM class	EC000897
Wires	1xAl/Cu 185-300 mm ²				

Technical data

Nominal current (IEC)	Cu	560	A
	Al	560	A
		-	
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		300	mm ²
Tightening torque			
	185-300 mm ²	70	Nm
		-	
		-	
		-	
		-	
Operating temperature		80	°C
Weight		287	g
		-	
Standards	UL 486E		
Color / Material	Stainless steel/ Tin plated copper		
Mounting / Connection	Screw M12		


Description

OL-connectors are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars are tin plated copper.

Drawing

Package

Package	Box	Pcs / Package	3	Weight [kg]	0,88
Length [mm]	86	Width [mm]	68	Height [mm]	82

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi