

Tuotetiedot

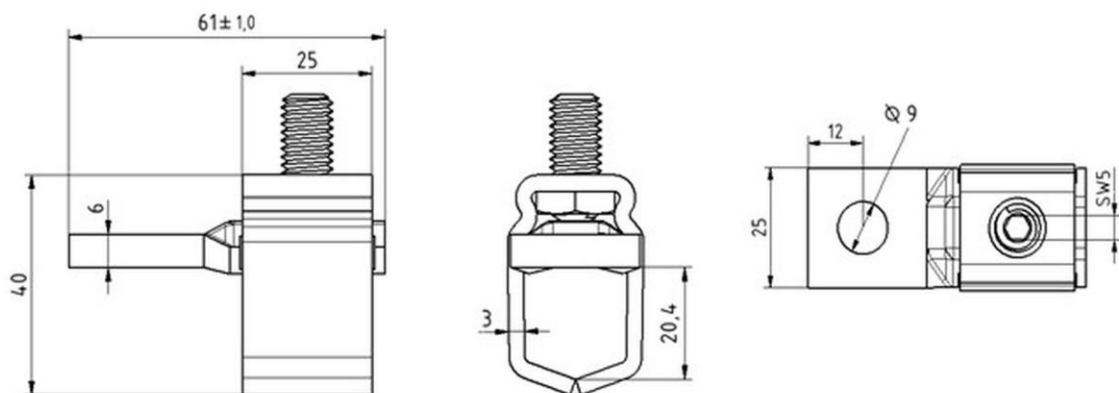
Tuotekoodi	VC01-0030	Sähkönumero	1912338	EAN-koodi	6410019123388
Tuotenimi	OL 95-240M D9	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 95-240 mm²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	400	A
	Al	400	A
		-	
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdin koko		240	mm ²
Kiristysmomentti			
	95-240 mm ²	40	Nm
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		140	g
		-	
Standardit	UL 486E		
Väri / Materiaali	Ruostumaton teräs/ Tinapinnoitettu kupari		
Kiinnitys / Kytkenä	Kuusiokoloruuvi M8		


Kuvaus

OL-yleisliittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen. Liittimen kehys on ruostumatonta terästä ja liitinkisko/painin on tinapinnoitettua kuparia.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	15	Paino [kg]	2,15
Pituus [mm]	85	Leveys [mm]	144	Korkeus [mm]	85

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

Product data

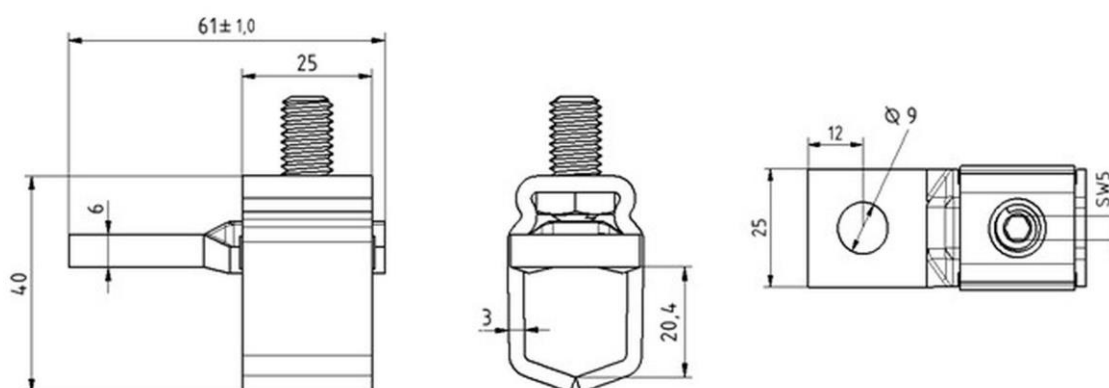
Product code	VC01-0030	STK-code	1912338	EAN-code	6410019123388
Product name	OL 95-240M D9			ETIM class	EC000897
Wires	1xAl/Cu 95-240 mm ²				

Technical data

Nominal current (IEC)	Cu	400	A
	Al	400	A
	-	-	-
	-	-	-
	-	-	-
	-	-	-
Number of poles	1	pcs	
Max. Cross section	240	mm ²	
Tightening torque			
	95-240 mm ²	40	Nm
	-	-	-
	-	-	-
	-	-	-
Max. Operating temperature	80	°C	
Weight	140	g	
	-	-	-
Standards	UL 486E		
Color / Material	Stainless steel/ Tin plated copper		
Mounting / Connection	Screw M8		


Description

OL-connectors are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars of tin plated copper.

Drawing

Package

Package	Box	Pcs / Package	15	Weight [kg]	2,15
Length [mm]	85	Width [mm]	144	Height [mm]	85

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi