

Tuotetiedot

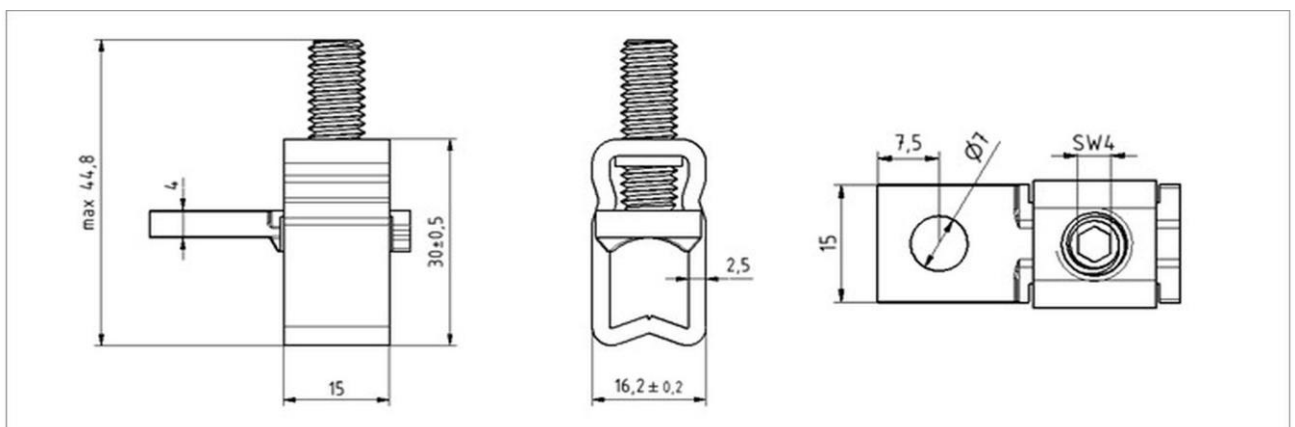
Tuotekoodi	VC01-0002	Sähkönumero	1914191	EAN-koodi	6410019141917
Tuotenimi	OL 6-70 D=7 M8x25	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 6-70 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	270	A
	Al	270	A
		-	
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		70	mm ²
Kiristysmomentti			
	6-70 mm ²	5,6	Nm
		-	
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		44	g
		-	
Standardit	UL 486E		
Väri / Materiaali	Ruostumaton teräs/ Tinapinnoitettu kupari		
Kiinnitys / Kytkeä	Kuusiokoloruuvi M8		


Kuvaus

OL-yleisliittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen. Liittimen kehys on ruostumatonta terästä ja liitinkisko/painin on tinapinnoitettua kuparia.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	30	Paino [kg]	1,35
Pituus [mm]	85	Leveys [mm]	144	Korkeus [mm]	85

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

Product data

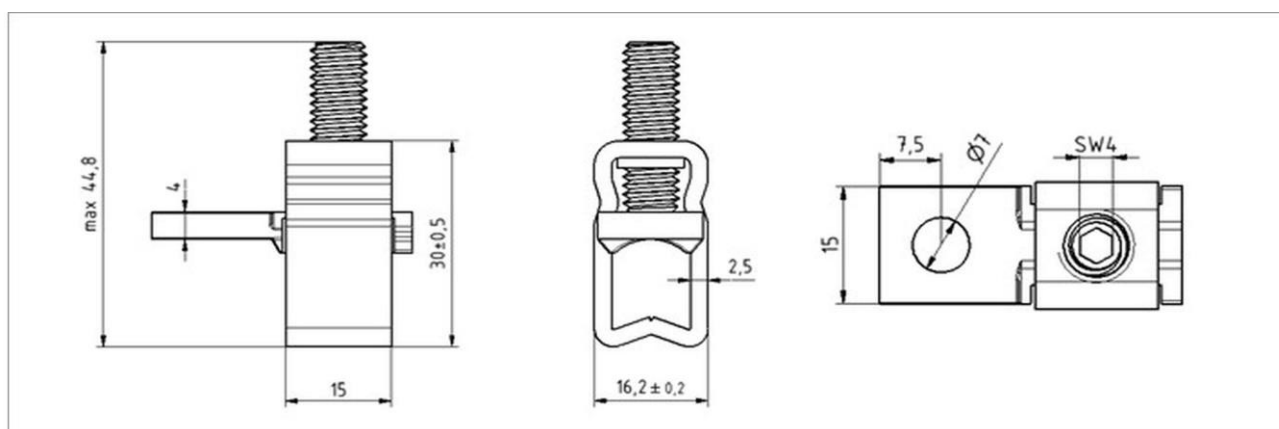
Product code	VC01-0002	STK-code	1914191	EAN-code	6410019141917
Product name	OL 6-70 D=7 M8x25			ETIM class	EC000897
Wires	1xAl/Cu 6-70 mm²				

Technical data

Nominal current (IEC)	Cu	270	A
	Al	270	A
		-	
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		70	mm ²
Tightening torque			
	6-70 mm ²	5,6	Nm
		-	
		-	
		-	
		-	
Operating temperature		80	°C
Weight		44	g
		-	
Standards	UL 486E		
Color / Material	Stainless steel/ Tin plated copper		
Mounting / Connection	Screw M8		


Description

OL-connectors are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars of tin plated copper.

Drawing

Package

Package	Box	Pcs / Package	30	Weight [kg]	1,35
Length [mm]	85	Width [mm]	144	Height [mm]	85

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi