


OTL Lite

Monipuolinen, kompakti ja entistäkin sulavalinjaisempi OTL Lite on syntynyt!

- Turvallinen UL 94 V-0 –luokan PA66 muoviraaka-aine
- Nimellisjännite 1000 V AC/DC
- Kiristysmomentit ja johdinalueet merkitty liittimen kanteen
- IP 20 –kosketussuojaus
- Kaapelien nopea ja helppo asennus kuusiokoloruuveilla
- Valmiiksi tehtaalla liitosrasvatut kytkentätilat
- Kannessa paikat merkintänaistoille (5 mm leveys, esim. Partex TX)
- OTL-liittimet ovat FI-hyväksyttyjä oikosulkutestattuja A-luokan liittimiä

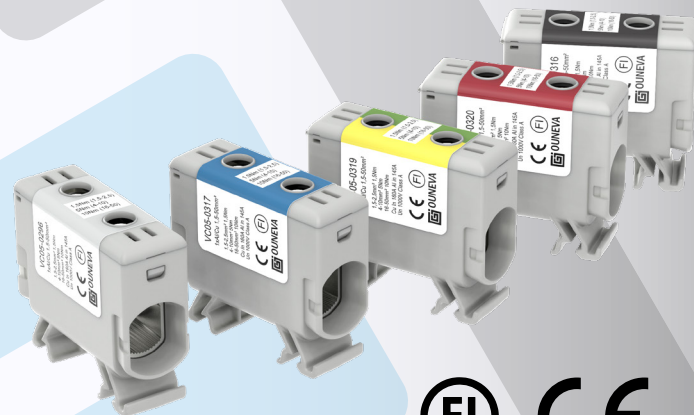

Sähkönumero	Tuotekoodi	Väri	Johdin (mm ²)
19 142 10	VC05-0296	Harmaa	1x Al/Cu 1,5-50
19 142 12	VC05-0317	Sininen	
19 142 13	VC05-0319	Kelta/Vihreä	
19 142 14	VC05-0320	Punainen	
19 142 11	VC05-0316	Musta	




Tuotetiedot

OTL Lite

Versatile, compact and even more convenient OTL Lite is born!

- Safe UL 94 V-0 –class PA66 plastic material
- Nominal voltage of 1000 V AC/DC
- Tightening torque labels on the connector cover
- IP 20 –protection class
- Easy and rapid installation with allen key
- Connection spaces are treated with corrosion preventing grease
- Places for component markers (5 mm width, e.g. Partex TX)
- OTL connectors are short circuit tested and FI approved A-class connectors

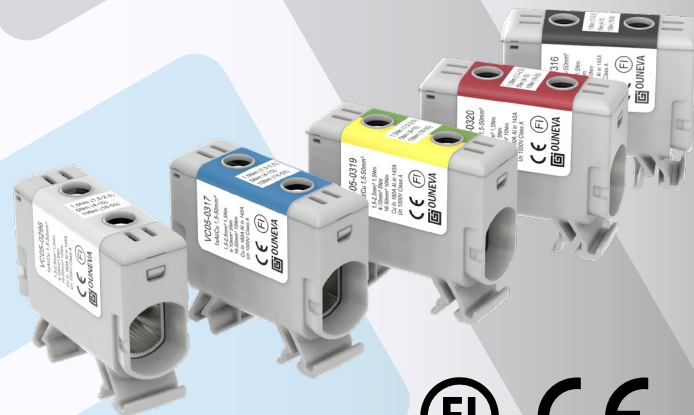

Stk code	Product code	Color	Conductor (mm ²)
19 142 10	VC05-0296	Grey	1x Al/Cu 1,5-50
19 142 12	VC05-0317	Blue	
19 142 13	VC05-0319	Yellow/Green	
19 142 14	VC05-0320	Red	
19 142 11	VC05-0316	Black	



Product documents