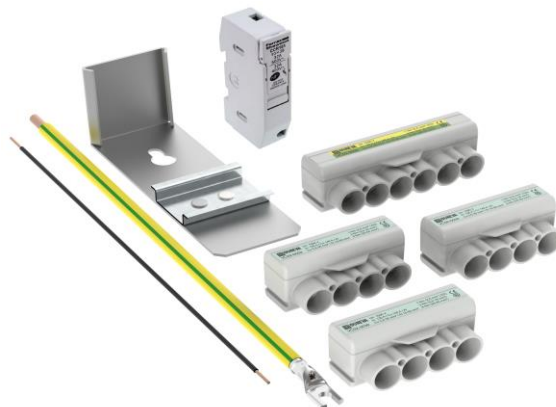


**Tuotetiedot**

|            |                                               |             |                |             |                      |
|------------|-----------------------------------------------|-------------|----------------|-------------|----------------------|
| Tuotekoodi | <b>VC02-0085</b>                              | Sähkönumero | <b>1914292</b> | EAN-koodi   | <b>6410019142921</b> |
| Tuotenimi  | Pylväskalustesarja 6 A sulakkeella            |             |                | ETIM-luokka | <b>EC000897</b>      |
| Johtimet   | Al 50 mm <sup>2</sup> / Cu 35 mm <sup>2</sup> |             |                |             |                      |

**Tekniset tiedot**

|                       |                                                                            |                  |                 |
|-----------------------|----------------------------------------------------------------------------|------------------|-----------------|
| Nimellisvirta (IEC)   | Cu                                                                         | <b>135</b>       | A               |
|                       | Al                                                                         | <b>145</b>       | A               |
| Nimellisjännite (IEC) |                                                                            | <b>1000</b>      | V               |
|                       |                                                                            | -                |                 |
|                       |                                                                            | -                |                 |
|                       |                                                                            | -                |                 |
|                       |                                                                            | -                |                 |
| Max. Johdinkoko       |                                                                            | <b>50</b>        | mm <sup>2</sup> |
| Kiristysmomentti      |                                                                            |                  |                 |
|                       | 1,5-2,5 mm <sup>2</sup> (M4)                                               | <b>1</b>         | Nm              |
|                       | 2,5-16 mm <sup>2</sup> (M10)                                               | <b>3</b>         | Nm              |
|                       | 25-50 mm <sup>2</sup> (M10)                                                | <b>8</b>         | Nm              |
|                       |                                                                            | -                |                 |
|                       |                                                                            | -                |                 |
| Käyttölämpötila       |                                                                            | <b>80</b>        | °C              |
| Paino                 |                                                                            | <b>350</b>       | g               |
| IP-suojaus            |                                                                            | <b>IP23/IP33</b> |                 |
| Standardit            | <b>EN 61238-1:2003 ; EN 60947-7-1:2009</b>                                 |                  |                 |
| Väri / Materiaali     | <b>Harmaa kotelo RAL 7035/ PA66, Tinapinnoitettu alumiininen liitinosa</b> |                  |                 |
| Kiinnitys / Kytkeä    | <b>Vapaasti kaapelissa</b>                                                 |                  |                 |


**Kuvaus**

Liitinsetti sisältää 3 kpl 4x50 LED liittimiä, 1 kpl 6x50 KeVi LED liittimen, 350 mm / 16 mm<sup>2</sup> MKEM-maadoitusjohtimen PK 16-6H -haarukkakaapelikengällä, 350 mm / 2,5 mm<sup>2</sup> mustan MK-johtimen, sulakepesän 6 ampeerin sulakkeella ja alustan ruuvikiinnitystä varten. IP-luokka on IP33, kun käytetään tiivistyspakkausta OD01-0078 ja IP23 kun käytetään ≥25 mm<sup>2</sup> johtimia suurissa johdinaukoissa ja 2,5 mm<sup>2</sup> johtimia LED-johdinaukoissa.

**Mittakuva**

**Pakkaus**

|              |                 |               |            |              |             |
|--------------|-----------------|---------------|------------|--------------|-------------|
| Pakkausmuoto | <b>Laatikko</b> | Kpl / Pakkaus | <b>5</b>   | Paino [kg]   | <b>1,85</b> |
| Pituus [mm]  | <b>295</b>      | Leveys [mm]   | <b>185</b> | Korkeus [mm] | <b>98</b>   |

**Ouneva Oy**

Teollisuustie 21  
 FI-82730 Tuupovaara  
 Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)


[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)

**Product data**

|              |                                                        |          |                |            |                      |
|--------------|--------------------------------------------------------|----------|----------------|------------|----------------------|
| Product code | <b>VC02-0085</b>                                       | STK-code | <b>1914292</b> | EAN-code   | <b>6410019142921</b> |
| Product name | 3pcs Al4x50/Cu4x35 + 1 pce Al6x50/Cu6x35 with 6 A fuse |          |                | ETIM class | <b>EC000897</b>      |
| Wires        | Al 50 mm <sup>2</sup> / Cu 35 mm <sup>2</sup>          |          |                |            |                      |

**Technical data**

|                       |                                                         |                  |                 |
|-----------------------|---------------------------------------------------------|------------------|-----------------|
| Nominal current (IEC) | Cu                                                      | <b>135</b>       | A               |
|                       | Al                                                      | <b>145</b>       | A               |
| Nominal voltage (IEC) |                                                         | <b>1000</b>      | V               |
|                       |                                                         | -                |                 |
|                       |                                                         | -                |                 |
|                       |                                                         | -                |                 |
|                       |                                                         | -                |                 |
| Max. Cross section    |                                                         | <b>50</b>        | mm <sup>2</sup> |
| Tightening torque     |                                                         |                  |                 |
|                       | 1,5-2,5 mm <sup>2</sup> (M4)                            | <b>1</b>         | Nm              |
|                       | 2,5-16 mm <sup>2</sup> (M10)                            | <b>3</b>         | Nm              |
|                       | 25-50 mm <sup>2</sup> (M10)                             | <b>8</b>         | Nm              |
|                       |                                                         | -                |                 |
|                       |                                                         | -                |                 |
| Operating temperature |                                                         | <b>80</b>        | °C              |
| Weight                |                                                         | <b>350</b>       | g               |
| IP-protection         |                                                         | <b>IP23/IP33</b> |                 |
| Standards             | <b>EN 61238-1:2003 ; EN 60947-7-1:2009</b>              |                  |                 |
| Color / Material      | <b>Grey Housing RAL 7035/PA66, Tin plated Aluminium</b> |                  |                 |
| Mounting / Connection | <b>On cable</b>                                         |                  |                 |

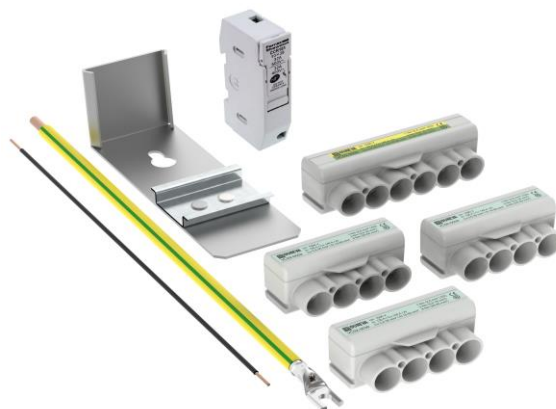
**Description**

Connector package includes 3 pieces of Al4x50/Cu4x35 grey LED connectors, 1 piece of Al6x50/Cu6x35 Ye/Gr LED connector, 350 mm / 16 mm<sup>2</sup> grounding cable with PK 16-6H fork cable shoe, 350 mm / 2,5 mm<sup>2</sup> black connector cable and 6 A fuse with base. IP class is IP33 when OD01-0078 sealing kit is used and IP23 when ≥25 mm<sup>2</sup> conductors are used in bigger conductor spaces and 2,5 mm<sup>2</sup> conductors in Led spaces.

**Drawing**

**Package**

|             |            |               |            |             |             |
|-------------|------------|---------------|------------|-------------|-------------|
| Package     | <b>Box</b> | Pcs / Package | <b>5</b>   | Weight [kg] | <b>1,85</b> |
| Length [mm] | <b>295</b> | Width [mm]    | <b>185</b> | Height [mm] | <b>98</b>   |

**Ouneva Oy**

Teollisuustie 21  
 FI-82730 Tuupovaara  
 Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)

[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)