

| Tuotetiedot           |                                                                                                                                             |      |                 |               |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------|---------------|
| Tuotekoodi            | VG03-0052                                                                                                                                   |      | Sähkönumero     | 1914357       |
| Tuotenimi             | OJL-liitin 135                                                                                                                              |      | EAN-koodi       | 6430051860317 |
| Johtimet              | IN 1x(Al/Cu) 2,5-35 mm <sup>2</sup> / 1x (Al/Cu) 2,5-10 mm <sup>2</sup> OUT: 4x (Cu) 2,5-16mm <sup>2</sup> / 2x (Cu) 2,5-10 mm <sup>2</sup> |      |                 |               |
| Tekniset tiedot       |                                                                                                                                             |      |                 |               |
| Nimellisvirta (IEC)   | Cu                                                                                                                                          | 135  | A               |               |
|                       | Al                                                                                                                                          | 120  | A               |               |
| Nimellisjännite (IEC) |                                                                                                                                             | 1000 | V               |               |
|                       |                                                                                                                                             | -    |                 |               |
|                       |                                                                                                                                             | -    |                 |               |
|                       |                                                                                                                                             | -    |                 |               |
| Napaluku              |                                                                                                                                             | 1    | kpl             |               |
| Max. Johdinkoko       |                                                                                                                                             | 35   | mm <sup>2</sup> |               |
| Kirstysmomentti       | 2,5-16 mm <sup>2</sup> (M6)                                                                                                                 | 3    | Nm              |               |
|                       | 25-35 mm <sup>2</sup> (M8)                                                                                                                  | 6    | Nm              |               |
|                       |                                                                                                                                             | -    |                 |               |
|                       |                                                                                                                                             | -    |                 |               |
| Input                 | 1x Al/Cu 2,5-35 mm <sup>2</sup> , 1x Al/Cu 2,5-10 mm <sup>2</sup>                                                                           |      |                 |               |
| Output                | 4x Cu 2,5-16 mm <sup>2</sup> , 2x Cu 2,5-10 mm <sup>2</sup>                                                                                 |      |                 |               |
|                       |                                                                                                                                             | -    |                 |               |
| Käyttölämpötila       |                                                                                                                                             | 80   | °C              |               |
| Paino                 |                                                                                                                                             | 75   | g               |               |
| IP-suojaus            |                                                                                                                                             | IP20 |                 |               |
| Standardit            | EN IEC 61238-1-1:2019; EN 60947-7-1:2009; EN 60947-7-2:2009                                                                                 |      |                 |               |
| Väri / Materiaali     | Musta kansi PC, Harmaa kotelo RAL 7035 PA66/V0, Runko tinapinnoitettua alumiinia                                                            |      |                 |               |
| Kiinnitys / Kytkenä   | DIN-kiskokiinnitys ja 2x ruuvikiinnitys (M5)                                                                                                |      |                 |               |
| Kuvaus                |                                                                                                                                             |      |                 |               |








1-vaiheinen OJL-liitin on tarkoitettu sähkölaitteiden haaroituskytkentöihin. Liittimessä on 2 syöttöjohdinta ja 6 haaroitusjohdinaukkoa. Liitinrungon materiaalina on käytetty tinapinnoitettua alumiinia ja kotelo PA66 V0.

## Mittakuva

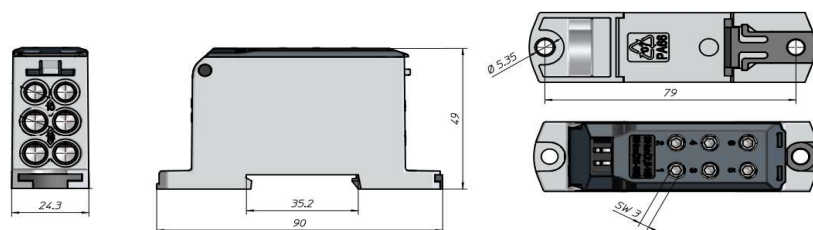

| Pakkaus      |          |               |     |              |      |
|--------------|----------|---------------|-----|--------------|------|
| Pakkausmuoto | Laatikko | Kpl / Pakkaus | 20  | Paino [kg]   | 1,50 |
| Pituus [mm]  | 202      | Leveys [mm]   | 128 | Korkeus [mm] | 95   |

Ouneva Oy  
Teollisuustie 21  
FI-82730 Tuupovaara  
Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)

[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)

| Product data          |                                                                                           |      |          |                                                                                    |                                                                                     |               |
|-----------------------|-------------------------------------------------------------------------------------------|------|----------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Product code          | VG03-0052                                                                                 |      | STK-code | 1914357                                                                            | EAN-code                                                                            | 6430051860317 |
| Product name          | OJL-connector 135                                                                         |      |          |                                                                                    | ETIM class                                                                          | EC000276      |
| Wires                 | IN 1x(Al/Cu) 2,5-35 mm²/ 1x (Al/Cu) 2,5-10 mm² OUT: 4x (Cu) 2,5-16mm²/ 2x (Cu) 2,5-10 mm² |      |          |                                                                                    |                                                                                     |               |
| Technical data        |                                                                                           |      |          |                                                                                    |                                                                                     |               |
| Nominal current (IEC) | Cu                                                                                        | 135  | A        |  |  |               |
|                       | Al                                                                                        | 120  | A        |                                                                                    |                                                                                     |               |
| Nominal voltage (IEC) |                                                                                           | 1000 | V        |                                                                                    |                                                                                     |               |
|                       |                                                                                           | -    |          |                                                                                    |                                                                                     |               |
|                       |                                                                                           | -    |          |                                                                                    |                                                                                     |               |
|                       |                                                                                           | -    |          |                                                                                    |                                                                                     |               |
| Number of poles       |                                                                                           | 1    | pcs      |                                                                                    |                                                                                     |               |
| Max. Cross section    |                                                                                           | 35   | mm²      |                                                                                    |                                                                                     |               |
| Tightening torque     |                                                                                           |      |          |                                                                                    |                                                                                     |               |
|                       | 2,5-16 mm² (M6)                                                                           | 3    | Nm       |                                                                                    |                                                                                     |               |
|                       | 25-35 mm² (M8)                                                                            | 6    | Nm       |                                                                                    |                                                                                     |               |
|                       |                                                                                           | -    |          |                                                                                    |                                                                                     |               |
|                       |                                                                                           | -    |          |                                                                                    |                                                                                     |               |
| Input                 | 1x Al/Cu 2,5-35 mm², 1x Al/Cu 2,5-10 mm²                                                  |      |          |                                                                                    |                                                                                     |               |
| Output                | 4x Cu 2,5-16 mm², 2x Cu 2,5-10 mm²                                                        |      |          |                                                                                    |                                                                                     |               |
|                       |                                                                                           | -    |          |                                                                                    |                                                                                     |               |
| Operating temperature |                                                                                           | 80   | °C       |                                                                                    |                                                                                     |               |
| Weight                |                                                                                           | 75   | g        |                                                                                    |                                                                                     |               |
| IP-protection         |                                                                                           | IP20 |          |                                                                                    |                                                                                     |               |
| Standards             | EN IEC 61238-1-1:2019; EN 60947-7-1:2009; EN 60947-7-2:2009                               |      |          |                                                                                    |                                                                                     |               |
| Color / Material      | Black Cover PC, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium        |      |          |                                                                                    |                                                                                     |               |
| Mounting / Connection | Din rail and 2x screw (M5) mounting                                                       |      |          |                                                                                    |                                                                                     |               |






## Description

The single pole distribution block for branching connection. Distribution block with 2 inputs and it will distribute the current through 6 output cables. Connector is made from tin plated aluminium and housing is PA66 V0.

## Drawing

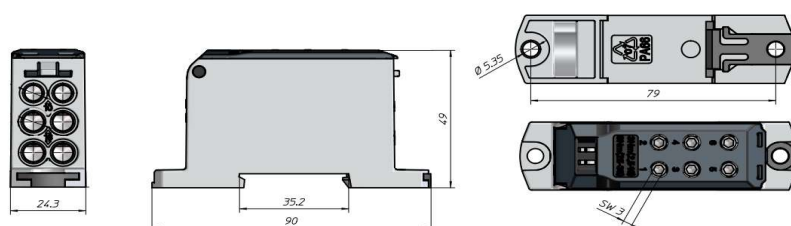

| Package     |            |               |             |
|-------------|------------|---------------|-------------|
| Package     | <b>Box</b> | Pcs / Package | <b>20</b>   |
|             |            | Weight [kg]   | <b>1,50</b> |
| Length [mm] | <b>202</b> | Width [mm]    | <b>128</b>  |
|             |            | Height [mm]   | <b>95</b>   |

## Ouneva Oy

Teollisuustie 21  
FI-82730 Tuupovaara  
Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)

[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)