


Tuotetiedot					
Tuotekoodi	VG03-0067	Sähkönumero	1914362	EAN-koodi	6430051861833
Tuotenimi	OJL-liitin 135 Vihreä PA66			ETIM-luokka	EC000276
Johtimet	IN 1x(Al/Cu) 2,5-35 mm ² / 1x (Al/Cu) 2,5-10 mm ² OUT: 4x (Cu) 2,5-16mm ² / 2x (Cu) 2,5-10 mm ²				

Tekniset tiedot				
Nimellisvirta (IEC)	Cu	135	A	
	Al	120	A	
Nimellisjännite (IEC)		1000	V	
		-		
		-		
		-		
Napaluku		1	kpl	
Max. Johdinkoko		35	mm ²	
Kirstymomentti				
	2,5-16 mm ² (M6)	3	Nm	
	25-35 mm ² (M8)	6	Nm	
		-		
		-		
Input	1x Al/Cu 2,5-35 mm ² , 1x Al/Cu 2,5-10 mm ²			
Output	4x Cu 2,5-16 mm ² , 2x Cu 2,5-10 mm ²			
		-		
Käyttölämpötila		80	°C	
Paino		75	g	
IP-suojaus		IP20		
Standardit	EN IEC 61238-1-1:2019; EN 60947-7-1:2009; EN 60947-7-2:2009			
Väri / Materiaali	Vihreä kansi RAL 6018 PA66/V0, Harmaa kotelo RAL 7035 PA66/V0, Runko tinapinnoitettua alumiinia			
Kiinnitys / Kytkeä	DIN-kiskokiinnitys ja 2x ruuvikiinnitys (M5)			



1-vaiheinen OJL-liitin on tarkoitettu sähkölaitteiden haaroituskytkentöihin. Liittimessä on 2 syöttöjohtinta ja 6 haaroitusjohtinaukkoa. Liitinrunon materiaalina on käytetty tinapinnoitettua alumiinia ja kotelo PA66 V0.

Mittakuva

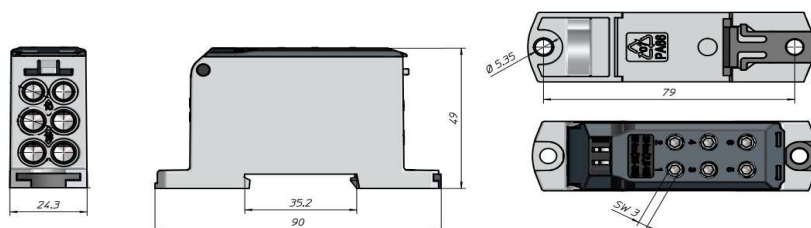

Pakkaus					
Pakkausmuoto	Laatikko	Kpl / Pakkaus	20	Paino [kg]	1,50
Pituus [mm]	202	Leveys [mm]	128	Korkeus [mm]	95

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi


Product data						
Product code	VG03-0067		STK-code	1914362	EAN-code	6430051861833
Product name	OJL-connector 135 Green PA66				ETIM class	EC000276
Wires	IN 1x(Al/Cu) 2,5-35 mm²/ 1x (Al/Cu) 2,5-10 mm² OUT: 4x (Cu) 2,5-16mm²/ 2x (Cu) 2,5-10 mm²					
Technical data						
Nominal current (IEC)	Cu	135	A			
	Al	120	A			
Nominal voltage (IEC)		1000	V			
		-				
		-				
		-				
Number of poles		1	pcs			
Max. Cross section		35	mm²			
Tightening torque						
	2,5-16 mm² (M6)	3	Nm			
	25-35 mm² (M8)	6	Nm			
		-				
		-				
Input	1x Al/Cu 2,5-35 mm², 1x Al/Cu 2,5-10 mm²					
Output	4x Cu 2,5-16 mm², 2x Cu 2,5-10 mm²					
Operating temperature		80	°C			
Weight		75	g			
IP-protection	IP20					
Standards	EN IEC 61238-1-1:2019; EN 60947-7-1:2009; EN 60947-7-2:2009					
Color / Material	Green cover RAL 6018 PA66/V0, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium					
Mounting / Connection	Din rail and 2x screw (M5) mounting					
Description						





The single pole distribution block for branching connection. Distribution block with 2 inputs and it will distribute the current through 6 output cables. Connector is made from tin plated aluminium and housing is PA66 V0.

Drawing

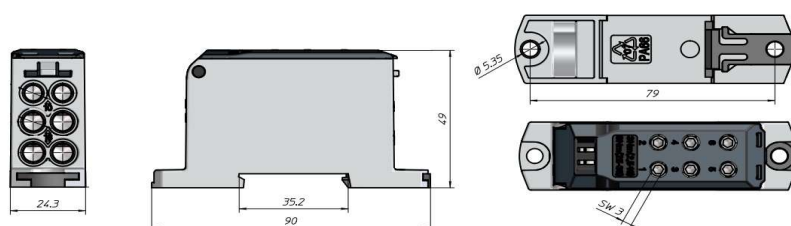

Package			
Package	Box	Pcs / Package	20
		Weight [kg]	1,50
Length [mm]	202	Width [mm]	128
		Height [mm]	95

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi