


AS-i cable, shaped for external auxiliary voltage 24 V black, Rubber 2 x 1.5 mm², 100 m consists of 100 m cable



General technical data			
design of the product		AS-Interface shaped cables	
Colour		black (DC 24 V)	
Material		rubber	
Quantity		100 m roll	
Mechanical data			
Without silicone precipitation		yes	
bending radius			
• for permanently laid cable minimum permissible		12 mm	
• with moving cable minimum permissible		24 mm	
Without halogens		yes	
Flexibility		very good	
Bending behavior according according to DIN VDE 0472 Part 603		no break after 30000 reverse bending cycles	
Core colours		brown, blue	
Ambient conditions			
Fire behavior		flammable	
resistance to oil		conditionally resistant	
Ozone and weather resistant		conditionally resistant	
Temperature range			
• stationary		-40 ... +85 °C	
• moved		-25 ... +85 °C	
Certificates/ approvals			
General Product Approval		Declaration of Conformity	Marine / Shipping
			other

[Confirmation](#)

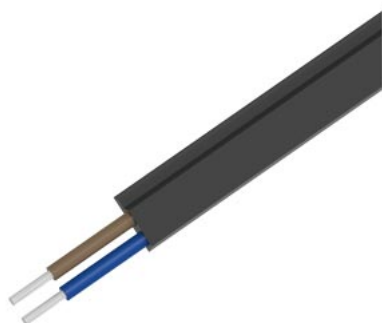

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RX9020-0AA00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9020-0AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RX9020-0AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9020-0AA00&lang=en

last modified:

12/23/2020 