

Presence detector

IR Quattro HD

LiveLink

EAN 4007841 009717

STEINEL[®]
PROFESSIONAL



Function description

Detection no finer! Infrared presence detector Presence Control PRO IR Quattro HD LiveLink for indoors, ideal for medium to large-size offices, conference and meeting rooms, classrooms and lecture theatres, sports halls and warehouses, installation height up to 10 m, for integration into the LiveLink system, 4800 switching zones for the ultimate in detection quality, presence detection over a true 64 m², square detection zone, mechanically scalable.

Technical specifications

Type	Presence detector
Dimensions (L x W x H)	120 x 120 x 50 mm
Number of Dali users	3
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	Open-plan office, high-bay warehouse, conference room, sports hall, classroom
Installation site	ceiling
Type of installation	Concealed wiring
Switching zones	4800 switching zones
Electronic scalability	No
Mechanical scalability	Yes
Mounting height	2,50 – 10,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	No

Reach, radial	8 x 8 m (64 m ²)
Reach, tangential	20 x 20 m (400 m ²)
Reach, presence	8 x 8 m (64 m ²)
Twilight setting TEACH	Yes
Time setting	30 s – 60 Min.
LiveLink values	Light level, Motion detection
With bus coupling	Yes
Settings via	LiveLink app
With remote control	No
IP rating	IP20
Material	Plastic
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	LiveLink
PU1, EAN	4007841009717

Presence detector

IR Quattro HD

LiveLink


EAN 4007841 009717

STEINEL[®]
PROFESSIONAL

Accessories

EAN 4007841 003036	Control PRO guard cage
EAN 4007841 009151	Remote control Smart Remote

Detection Zone

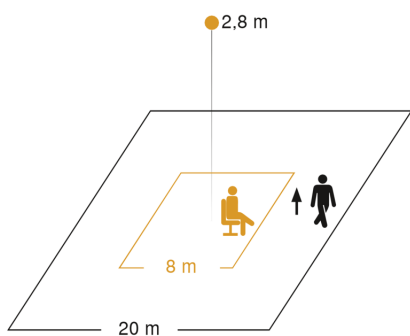

Mögliche Montagehöhe: 2,50 m – 10,00 m

Orange: Präsenz

Schwarz: tangential

Dimension Drawing

