

HF 3360

V3 KNX - concealed, sq.
EAN 4007841 058227
Article number 058227



high frequency
sensor 360°



max. Ø 8 m



KNX



IP20



2 - 1000 lux



1 - 255 min



ideal 2 - 2,8 m

Teach

Teach mode



energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie

Function description

Perfection through and through. High-frequency motion detector HF 3360, ideal for basement corridors, stairwells, multi-storey car parks, installation height 2.8 m, 360° angle of coverage, reach 1 – 8 m (radial), detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls. Available either in round or square surface-mounted and concealed version.

Technical specifications

Dimensions (L x W x H)	64 x 94 x 94 mm	HF-system	5,8 GHz
Manufacturer's Warranty	5 years	Detection	also through glass, wood and stud walls
Settings via	ETS software, Remote control, Bus, Smart Remote	Detection angle	360 °
With remote control	No	Angle of aperture	180 °
Version	KNX - concealed, sq.	Sneak-by guard	Yes
PU1, EAN	4007841058227	Capability of masking out individual segments	No
Type	Motion detectors	Electronic scalability	Yes
Application, place	Indoors	Mechanical scalability	No
Application, room	function room / ancillary room, stairwell, WC / washroom, multi-storey / underground car park, Indoors	Reach, radial	Ø 8 m (50 m²)
Colour	white	Reach, tangential	Ø 8 m (50 m²)
Colour, RAL	9003	Transmitter power	< 1 mW
Includes corner wall mount	No	Twilight setting	2 – 1000 lx
Installation site	wall, ceiling, corner	Time setting	5 s – 15 Min.
Installation	Concealed wiring, Wall, Ceiling, corner	Basic light level function	Yes
		Main light adjustable	0 - 100 %

HF 3360

V3 KNX - concealed, sq.
 EAN 4007841 058227
 Article number 058227

Technical specifications


IP-rating	IP20
Ambient temperature	-20 – 50 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	High frequency, Light sensor
Mounting height	2,00 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m

Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	KNX bus
Rated current	12,5 mA

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 035174	Corner wall mount 3000
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056681	Black cover for HF 3360

Detection Zone

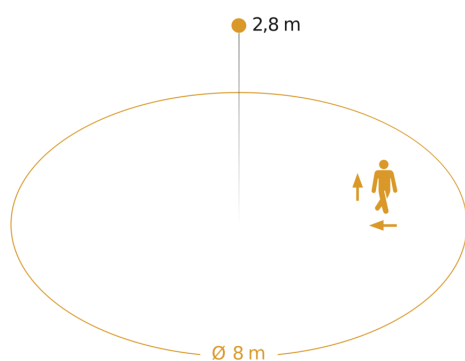

Possible mounting height: 2,00 m – 4,00 m
 Orange: radial and tangential

Dimension Drawing

