

Motion detector

IS 3360 MX Highbay

V3 KNX - concealed, sq.

EAN 4007841 058203

STEINEL
PROFESSIONAL



KNX

2000w

max. 2000 W



IP20



ideal 4 - 12 m



ideal 4 - 14 m

TEACH

Teach mode



energy saving



CE



VDE

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version.

Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	94 x 94 x 78 mm
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	high-bay warehouse, sports hall
Installation site	ceiling
Type of installation	Concealed wiring
Switching zones	1416 switching zones
Electronic scalability	No
Mounting height	4,00 – 14,00 m
Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	45 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes

Reach, radial	Ø 14 m (154 m²)
Reach, tangential	Ø 36 m (1018 m²)
Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Time setting	0 s – 1092 Min.
Basic light level function	No
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function
With bus coupling	Yes
IP rating	IP20
Material	Plastic
Colour	white
Manufacturer's Warranty	5 years
Version	KNX - concealed, sq.
PU1, EAN	4007841058203

Motion detector

IS 3360 MX Highbay

V3 KNX - concealed, sq.


EAN 4007841 058203

STEINEL[®]
PROFESSIONAL

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

Detection Zone

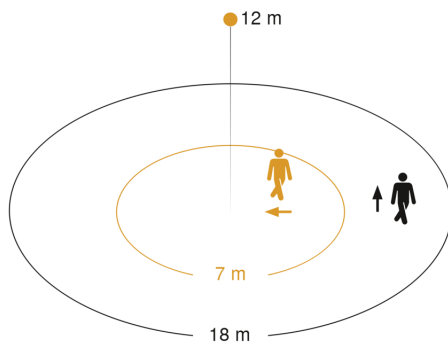

Mögliche Montagehöhe: 4,00 m – 14,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

