

EAN 4007841 029814







Function description

The classic detector, now with even more class. Infrared motion detector IS 140-2 Z-Wave, can be integrated into the Smart Friends system or any other Z-Wave network, for indoors and out, ideal for targeted detection close to the building, 140° angle of coverage, reach up to 14 m, selectable time and twilight threshold, sensor turns through 180° and tilts through 90° for exact adjustment of the detection zone.

Technical specifications

Туре	Motion detectors
Dimensions (L x W x H)	99 x 86 x 82 mm
Mains power supply	230 – 240 V / 50 Hz
Sensor Technology	passive infrared
Application, place	Outdoors, Indoors
Application, place, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Installation site	wall
Installation	Surface wiring
Electronic scalability	No
Mechanical scalability	No
Mounting height	1,80 – 3,00 m
Optimum mounting height	2 m
Detection angle	140 °
Angle of aperture	40 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	r = 3 m (11 m ²)

Reach, tangential	r = 14 m (239 m ²)
Twilight setting TEACH	No
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Switching output 1, resistive	1000 W
Switching output 1, number of LEI fluorescent lamps	Ds / _{6 pcs.}
Basic light level function	No
Functions	Sensor channel, Actuator channel
With bus coupling	No
Settings via	Z-Wave, Potentiometers
IP-rating	IP54
Material	Plastic
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	3 years
Version	white
PU1, EAN	4007841029814



EAN 4007841 029814





Accessories

EAN 4007841 029876	Smartfriends Box
EAN 4007841 631864	Corner wall mount 07
EAN 4007841 631765	Corner wall mount 07

Detection Zone

Dimension Drawing



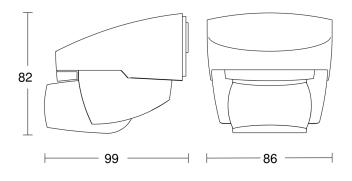

Mögliche Montagehöhe: 1,80 m – 3,00 m Orange: radial Schwarz: tangential