

Motion detector

IS 3360 MX Highbay

PF - concealed, sq.

EAN 4007841 033590

STEINEL[®]
PROFESSIONAL



2000w



max. 2000 W

IP20



ideal 4 - 12 m



ideal 4 - 14 m

TEACH

Teach mode



energy saving



CE



VDE

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version.

Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	94 x 94 x 78 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	high-bay warehouse, sports hall, indoors
Installation site	ceiling
Type of installation	Concealed wiring
Switching zones	1416 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	4,00 – 14,00 m
Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes

Reach, radial	Ø 14 m (154 m ²)
Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Constant-lighting control	No
Basic light level function	No
With remote control	No
Interconnection	Yes
IP rating	IP20
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	PF - concealed, sq.
PU1, EAN	4007841033590

Motion detector

IS 3360 MX Highbay

PF - concealed, sq.


EAN 4007841 033590

STEINEL[®]
PROFESSIONAL

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8

Detection Zone

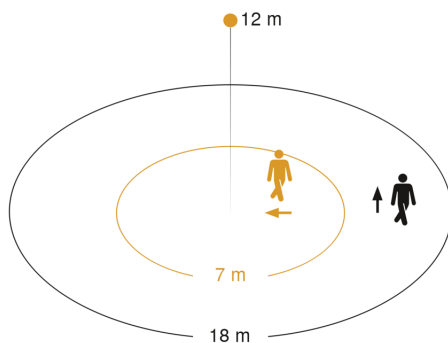


Mögliche Montagehöhe: 4,00 m – 14,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

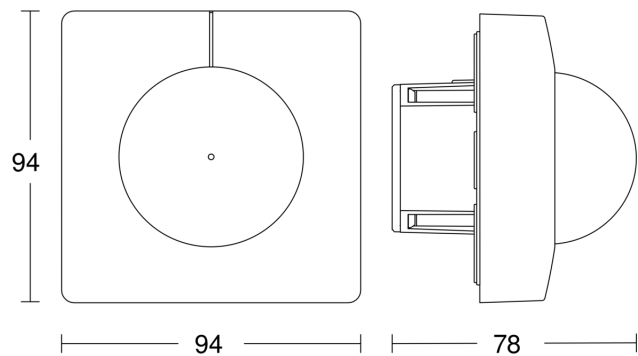

Master circuit diagram

