


Photo-cell controller - Professional Line

NightMatic 5000-3

COM1 - black

EAN 4007841 011680



Twilight switch +
eco-mode

2000w

max. 2000 W



IP54



2 - 1000 lux



manufacturer's
warranty
steinel-professional.de/garantie



CE



VDE

Function description

Intelligent lighting control. NightMatic 5000-3 photo-electric lighting controller for indoors and out, ideal for illuminating shop windows, advertising and specific areas through the night, diffuse light measurement for monitoring the complete ambient brightness, unique night economy mode, heavy-duty relay for high switching capacity.

Technical specifications

Type	Photo-cell controller
Dimensions (L x W x H)	42 x 95 x 95 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	Light sensor
Application, place	Indoors
Installation site	wall, corner
Installation	Surface wiring
Twilight setting	2 – 1000 lx
Switching output 1, resistive	2000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Basic light level function	No

Functions	Night economy mode, light ON / OFF in the morning
Settings via	Remote control, Potentiometers, Smart Remote
IP-rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	black
Colour, RAL	9005
Manufacturer's Warranty	5 years
Version	COM1 - black
PU1, EAN	4007841011680

Accessories


EAN 4007841 648015	Corner wall mount 3000
EAN 4007841 035174	Corner wall mount 3000
EAN 4007841 559410	Service remote control RC8

NightMatic 5000-3


COM1 - black

EAN 4007841 011680

Dimension Drawing

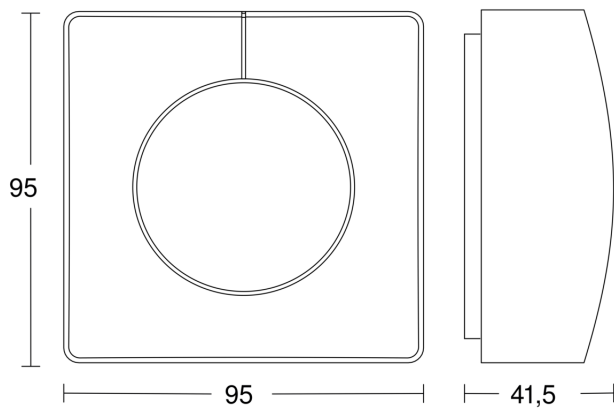

Master circuit diagram

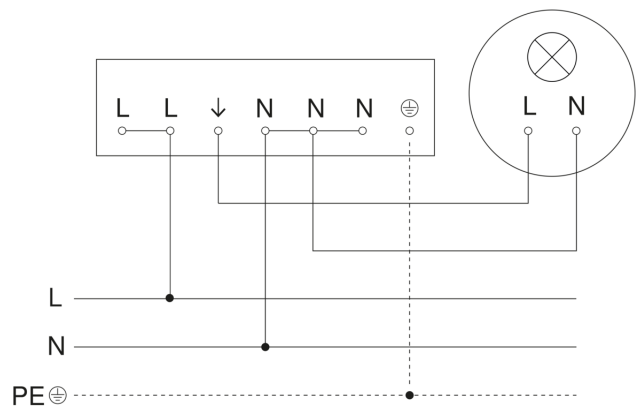

Master/slave interconnection circuit diagram

